

**BATTERY
SWITCHES**





BATTERY SWITCHES

B

B

Bluewater Enterprises offers high quality battery switches for marine power management. Built with **corrosion-resistant materials**, they ensure **secure connections** and **efficient distribution**. Engineered for durability and safety, our switches keep your boat powered and ready.

VOLTAGE & CABLES

All Non-Motorized Switches

Max Voltage: 48VDC
Cable Size: 4/0 AWG

All Motorized Switches

Max Voltage: 16VDC
Cable Size: 26 AWG / Multipurpose 5 Wire



9800-006-10
Panel Mount
9800-006-11
Surface Mount

ON/OFF SWITCH

- Single Circuit Switch
- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.17"

Continuous Rating: 300 Amps DC
Intermittent Rating: 500 Amps DC (5 min)
Cranking Rating: 900 Amps DC (30 sec)
MOQ: 10



9800-007-10
Panel Mount
9800-007-11
Surface Mount

OFF/1/2/BOTH SWITCH

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.17"

Continuous Rating: 300 Amps DC
Intermittent Rating: 500 Amps DC (5 min)
Cranking Rating: 900 Amps DC (30 sec)
MOQ: 10

Great For: Reliable power management, battery isolation, and safe high-current handling with secure connections.



9800-008-10
Panel Mount
9800-008-11
Surface Mount

OFF/1/2 SWITCH

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.17"

Continuous Rating: 300 Amps DC
Intermittent Rating: 500 Amps DC (5 min)
Cranking Rating: 900 Amps DC (30 sec)
MOQ: 10



9800-010-10
Panel Mount
9800-010-11
Surface Mount

ON/OFF DUAL CIRCUIT SWITCH

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.17"

Continuous Rating: 300 Amps DC
Intermittent Rating: 450 Amps DC (5 min)
Cranking Rating: 675 Amps DC (30 sec)
MOQ: 10



9800-011-10
Panel Mount
9800-011-11
Surface Mount

ON/OFF DUAL CIRCUIT PLUS SWITCH

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.17"

Continuous Rating: 300 Amps DC
Intermittent Rating: 450 Amps DC (5 min)
Cranking Rating: 675 Amps DC (30 sec)
MOQ: 10



BATTERY SWITCHES

B

B



9800-7101-00

AUTO CHARGING RELAY

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.17"
- Automatically combines batteries when charging and isolates when not.

Continuous Rating: 125 Amps
Intermittent Rating: 140 Amps
MOQ: 10



9800-206-11

2 STUD MOTORIZED BATTERY SWITCH OR VSR

VSR automatically connects or disconnects batteries based on voltage; a 2-stud switch can function as one if wired accordingly.

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.13"
- Available with Black, Red, or Yellow Knobs

Continuous Rating: 300 Amps DC
Intermittent Rating: 500 Amps DC (5 min)
Cranking Rating: 900 Amps DC (30 sec)



9800-211-11

4 STUD MOTORIZED BATTERY SWITCH W/ VSR

VSR automatically connects or disconnects batteries based on voltage level and is rated for 300 amps.

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.13"
- Available with Black, Red, or Yellow Knobs

Continuous Rating: 300 Amps DC
Intermittent Rating: 500 Amps DC (5 min)
Cranking Rating: 900 Amps DC (30 sec)

Great For: Reliable power management, battery isolation, and safe high-current handling with secure connections.



MOTORIZED 32 VOLT SWITCH

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.13"
- Available with Black, Red, or Yellow Knobs

Continuous Rating: 300 Amps DC
Intermittent Rating: 500 Amps DC (5 min)
Cranking Rating: 900 Amps DC (30 sec)
MOQ:

REMOTE ROCKER SWITCH ORDERING GUIDE

Overview	Part #	Function
Our remote rocker switches pair perfectly with our motorized switches for easy engine control and auxiliary battery charging. A safety slide window prevents accidental shut-offs, while red, green, and yellow LEDs indicate power status.	*2022	(ON)-OFF-(ON)
	2145	(ON)-OFF-(ON)
	2146	ON-OFF-ON
	2155-C	ON-ON

*All rocker switches have two lights, but the 2022 model features dual-color lighting.



REMOTE ROCKER SWITCH W/ SLIDE WINDOW

- LED Power Indicators (Red, Yellow, Green)
- Safety Window
- 1.97" H x 1.0" W

Tab size: .250
Control rating: 20A @4-14V / 15A @ 15-28V
MOQ:

SOLENOID REMOTE SWITCH
WIRE SIZE AND CURRENT RATINGS

Wire Size	Cranking 30 Sec.	Intermittent 5 Min.	Continuous (UL 1107)
2/0 AWG (70mm2)	1,000A	400A	225A
4/0 AWG (120mm2)	1,100A	400A	300A
2x4/0 AWG (2x120mm2)	1,450A	700A	500A



9805-7700-0 (Latching)
9805-7713-0 (Auto Release)

SOLENOID REMOTE
SWITCH

- Mounting Holes 0.21"
- Distance Between Mounting Holes: 2.99"

Terminal Stud Size: 3/8" - 16
Control Voltage: 9 -16VDC



9805-7101-0 (Latching)

SOLENOID REMOTE
AUTO CHARGING RELAY


- Mounting Holes 0.19"
- Distance Between Mounting Holes: 2.13"

Terminal Stud Size: 3/8" - 16
Control Voltage: 9 -16VDC

Great For: Reliable power management, battery isolation, and safe high-current handling with secure connections.

SWITCH HOLDER DIAGRAMS



SINGLE BATTERY HOLDER

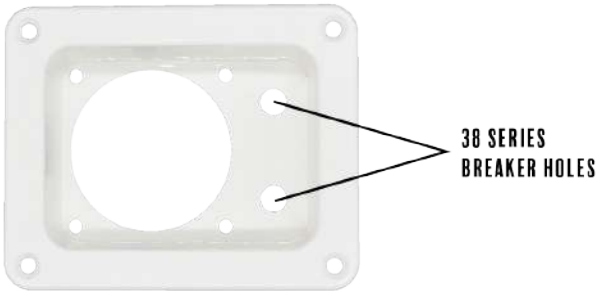

SINGLE BATTERY
SWITCH HOLDER

- **Standard**
White: 17000-001-001
Black: 17000-001-000
- **With 38 Series Breaker Holes**
White: 17000-002-001
Black: 17000-002-000

DUAL BATTERY HOLDER

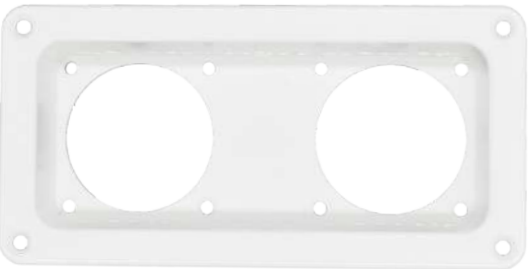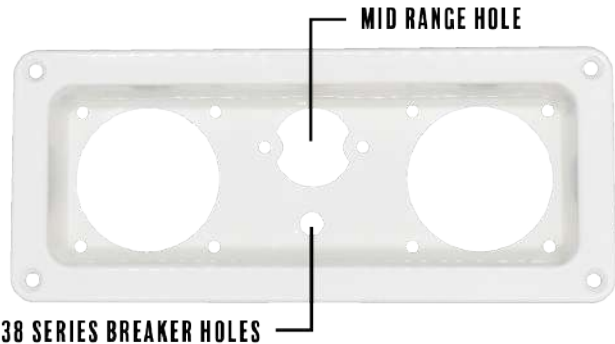

DUAL BATTERY
SWITCH HOLDER

- **Standard**
White: 17000-003-001
Black: 17000-003-000
- **With 38 Series Breaker Holes**
White: 17000-004-001
Black: 17000-004-000
- **With Mid-Range & 38 Series Breaker Holes**
White: 17000-005-001
Black: 17000-005-000

BLUEWATER

ENTERPRISES

About Bluewater Enterprises

At Bluewater Enterprises, we're committed to delivering quality marine electronics at a price you can trust. Whether you're upgrading your vessel's systems or building from scratch, our range of switches, busbars, couplers, and cables are engineered to perform in the toughest marine environments.

Stay Connected

Explore our full product range, get installation tips, and stay current with new releases.

Website: www.bluewatergadgets.com

Email: sales@bluewatergadgets.com

Phone: (855)-2583-732

Address: 13620 49th St N Clearwater, FL 33762

Follow Us for Updates and Promotions

Facebook & LinkedIn: @bluewaterenterprises

Instagram: @bluewater_gadgets



Scan to View our Full Product
Range Online