

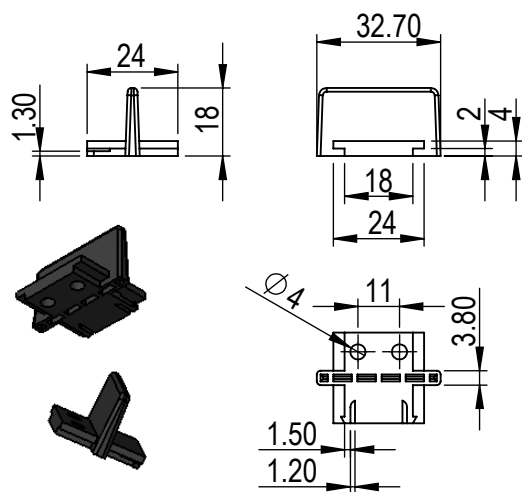
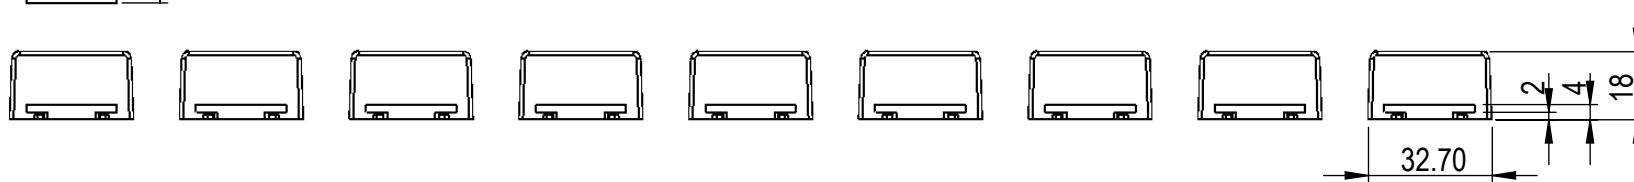


n position 8 position 7 position 6 position 5 position 4 position 3 position 2 position 1 position

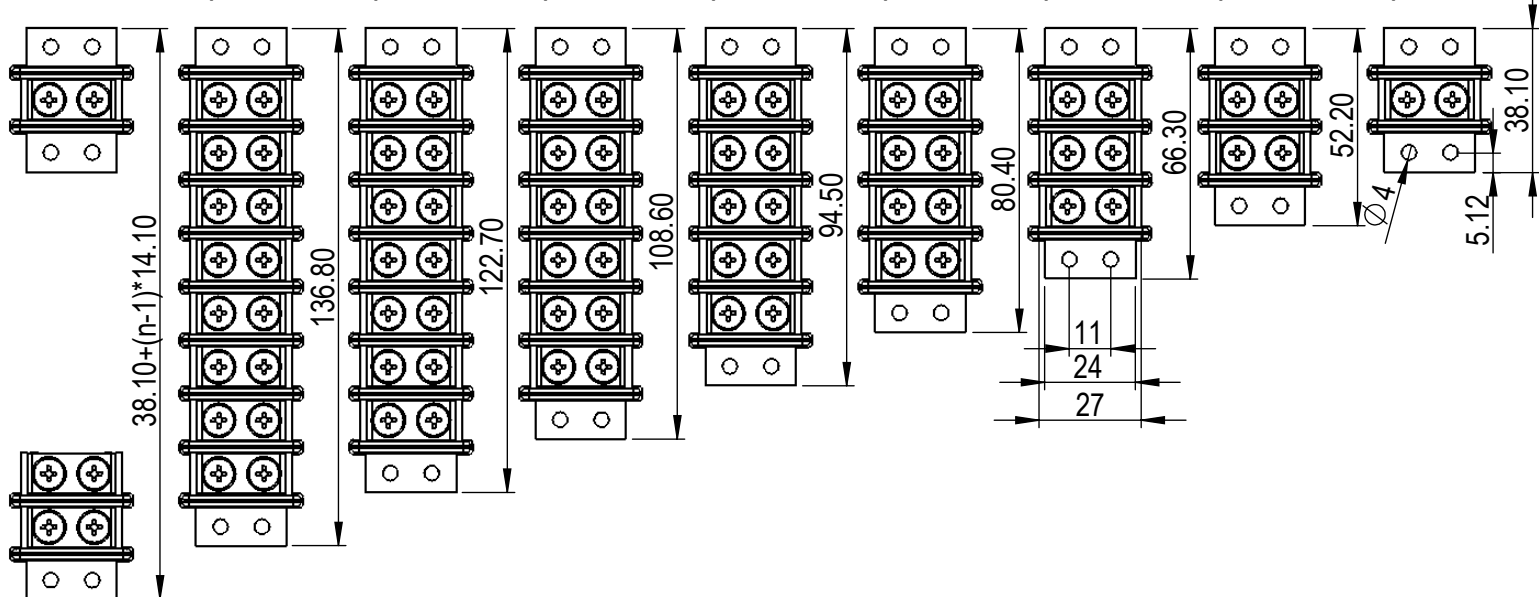

30A Terminal Block Part A
16000-01-0A

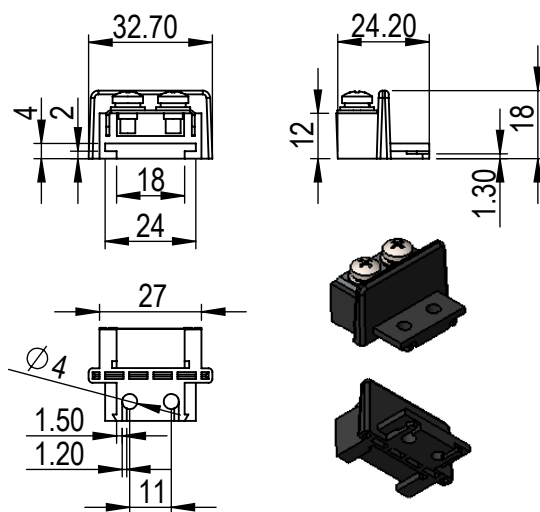

30A Terminal Block Part B
16000-02-0B

- 1) Plastic Material: Nylon with Dielectric Property
- 2) Conducting Plate: SS 304 with the thickness of 0.8mm
- 3) 3 in 1 Screws: M4*8 SS 304
- 4) 30A with Listed ring lug or unprepared wire
- 5) 600 Volts AC/DC
- 6) Short Circuit Current Rating: 10,000A
- 7) Storage and transportation temperature range: -35°C to 110°C (-31F to 230F)
- 8) Flammability rating of insulator base: UL 94V-0

30A Terminal Block			BlueWater Enterprises	
Part No.	Date	Ratio		
	2022-12-23	1:2	Unit	mm
Total 1 page, Page No. 1			Size	A4

