





**CIRCUIT
BREAKERS**





- Mounting Holes 0.09" **Panel Mount**
- Distance Between Mounting Holes: 1.4"
- Mounting Holes 0.23" **Surface Mount**
- Distance Between Mounting Holes: 1.4" H / 0.75" W

Max Voltage: 32VDC
Available Amps : 20, 30, 40, 50, 60A
MOQ: 20




- Mounting Holes 0.09" **Panel Mount**
- Distance Between Mounting Holes: 1.4"
- Mounting Holes 0.23" **Surface Mount**
- Distance Between Mounting Holes:
1.4" H / 0.75" W

Max Voltage: 32VDC/48VDC
Available Amps: 30 - 250A
MOQ: 20

Parts Available	77000-9600 Panel Mount 77000-9900 Surface Mount
AMPS Available *indicates only available with surface mount	30, 35, 40, 50, 60, 70, 80, 90, 100, 110, 120, *130, 150, *200, *250
Example Order	77000-9900-030 (High Amp Surface Mount) - (30 Amp)

Great For: Reliable Circuit Protection, Simplifying Wiring, And Safely Handling 3A To 250A With Secure Connections.



- Mounting Holes 0.1" (J Hook)
- Distance Between Mounting Holes: 0.44"
- .250 Tab

Max Voltage: 32/50VDC
Current Rating: 3 -30A
MOQ: 200

Part Options	Black Marked Thermal Breaker P3X16
	White Marked Thermal Breaker P3Y16
	Black Marked 90 degree screw P3XJ6
AMPS Available	3, 4, 5, 6, 7, 7.5, 8, 10, 12, 15, 20, 25, 30
Example Order	38-03-P3XJ6-P00NB1
	(3 Amp) - (Black Marked 90 degree screw)

*Some Part Options Are Not Available With Certain Amperages



A SERIES BREAKER



C SERIES BREAKER



A-Series
A&* -xx - #
(&) Indicates Actuator
(*) Indicates Color
(xx) Indicates Amp
(#) Indicates Poles

A SERIES BREAKER

- Terminal Screws: #10-32 Stainless Steel
- Mounting Holes: 0.16"
- Distance Between Mounting Holes: 2.06"

Max Voltage: 80VDC
Available Amps: 2.5-50A
MOQ: 100

A SERIES ORDERING GUIDE

EXAMPLE ORDER: **ATB-15-2**

1. Actuator	T = Toggle FR = Flat Rocker RR = Raised Rocker RO = Restricted Off		
2. Color	W = White B = Black R = Red		
3. Amperage	2.5 = 2.5 Amps 05 = 5 Amps 10 = 10 Amps 15 = 15 Amps	20 = 20 Amps 25 = 25 Amps 30 = 35 Amps 35 = 35 Amps	40 = 40 Amps 45 = 45 Amps
4. Poles	1 = One Poles 2 = Two Poles 3 = Three Poles		

Great For: Protecting Marine AC Circuits, Preventing Overload Damage, And Providing Reliable Resettable Power Control.



C-Series
C&* -xx - #
(&) Indicates Actuator
(*) Indicates Color
(xx) Indicates Amp
(#) Indicates Poles

C SERIES BREAKER

- Terminal Stud: #1/4-20 Stainless Steel
- Mounting Holes: 0.16"
- Distance Between Mounting Holes: 1.66"

Max Voltage: 80VDC
Available Amps: 5 - 100A
MOQ: 100


C SERIES ORDERING GUIDE

EXAMPLE ORDER: **CTW-30-1**

1. Actuator	T = Toggle FR = Flat Rocker RR = Raised Rocker RO = Restricted Off			
2. Color	W = White B = Black R = Red			
3. Amperage	2.5 = 2.5 Amps 05 = 5 Amps 10 = 10 Amps 15 = 15 Amps	20 = 20 Amps 25 = 25 Amps 30 = 35 Amps 35 = 35 Amps	40 = 40 Amps 50 = 50 Amps 60 = 60 Amps 70 = 70 Amps	80 = 80 Amps 90 = 90 Amps 100 = 100 Amps
4. Poles	1 = One Poles 2 = Two Poles 3 = Three Poles			



CIRCUIT BREAKER & FUSE BLOCKS

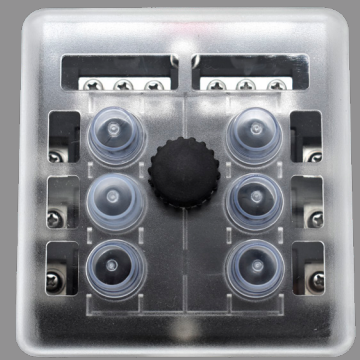

3200-2001-006
6 Position

3200-2001-012
12 Position

6 & 12 POSITION BREAKER BLOCK

- M5 main connecting studs
- Mounting Holes. 0.1695"
- Distance Between Mounting Holes:
6 Position: 3.74" H / 3.54" W
12 Position: 6.61" H / 3.54" W

Max Voltage: 48VDC
Current Rating: 100A (6p) / 200A (12p)



3200-3001-012

12 POSITION ATC FUSE BLOCK WITH LED

- M5 main connecting studs
- Mounting Holes. 0.1695"
- Distance Between Mounting Holes:
4.85" H / 2.76" W

Max Voltage: 48VDC
Current Rating: 200A



3200-100-006
6 Position

3200-100-010
10 Position

6 & 10 POSITION FUSE BLOCK

- M5 main connecting studs
- Mounting Holes. 0.1695"
- Distance Between Mounting Holes:
6 Position: 0.65" H / 1.125" W
10 Position: 1.925" H / 1.125" W

Max Voltage: 48VDC
Current Rating: 100A (6p) / 200A (10p)



3200-0001-006
6 Position

3200-0001-012
12 Position

6 & 12 POSITION FUSE BLOCK WITH LEDS

- M5 main connecting studs
- Mounting Holes. 0.1695"
- Distance Between Mounting Holes:
6 Position: 2.825" H / 2.725" W
12 Position: 4.725" H / 2.725" W

Max Voltage: 48VDC
Current Rating: 100A (6p) / 200A (12p)




3200-3003-006
6 Position

3200-3003-012
12 Position

6 & 12 POSITION FUSE BLOCK

- M5 main connecting studs
- Mounting Holes. 0.1750"
- Distance Between Mounting Holes:
6 Position: 3.709" H / 2.331" W
12 Position: 5.285" H / 2.325" W

Max Voltage: 48VDC
Current Rating: 100A (6p) / 200A (12p)

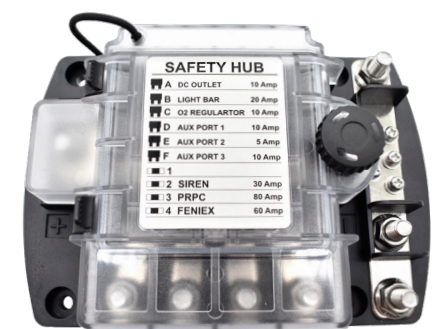

3000-4001-00


SAFETY HUB

- M8 main connecting studs
- Mounting Holes. 0.2360"
- Distance Between Mounting Holes:
3.995" H / 4.705" W

Max Voltage: 48VDC
Current Rating: 100A

Great For: Reliable Circuit Protection, Simplifying Wiring, And Safely Handling 100a To 250a With Breakers And Fuses.

BLOCKS AND ACCESSORIES

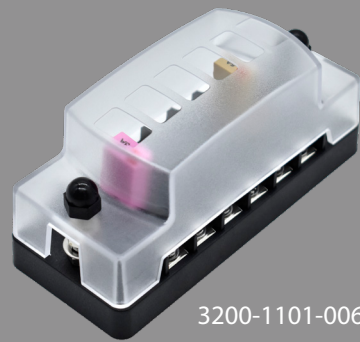

3200-1101-006

6 POSITION ATC FUSE BLOCK

- M5 main connecting studs
- Mounting Holes. 0.1695"
- Distance Between Mounting Holes: 3.43" H / 1.25" W

Max Voltage: 48VDC
Current Rating: 100A




3200-1101-012

12 POSITION ATC BREAKER BLOCK

- M5 main connecting studs
- Mounting Holes. 0.1695"
- Distance Between Mounting Holes: 6.875" H / 1.25" W

Max Voltage: 48VDC
Current Rating: 200A



1200500-0092

IN LINE CIRCUIT BREAKER HOLDER

- Gasket-sealed for waterproof protection
- Clear cap for easy resets
- Mounting Tab

Great For: Reliable Circuit Protection, Simplifying Wiring, And Safely Handling 100A To 250A With Fuses And Accessories.



1200100-0092
Kit

1200101-0092
Terminal Only

IN LINE FUSE HOLDER

- Sealed IP67
- ATC Fuse Holder
- Mounting Tab



353-11035-C

C-SERIES POWER SELECTOR



1500-909-000

ELCI COVER



1300600-0092

BLACK TOGGLE

MOQ: 100



1300400-0092
Black

1300411-0092
Clear

CIRCUIT BREAKER BOOT

MOQ: 100

BLUEWATER

ENTERPRISES

About Bluewater Enterprises

At Bluewater Enterprises, we're committed to delivering quality marine electronics at a price you can trust. Whether you're upgrading your vessel's systems or building from scratch, our range of switches, busbars, couplers, and cables are engineered to perform in the toughest marine environments.

Stay Connected

Explore our full product range, get installation tips, and stay current with new releases.

Website: www.bluewatergadgets.com

Email: sales@bluewatergadgets.com

Phone: (855)-2583-732

Address: 13620 49th St N Clearwater, FL 33762

Follow Us for Updates and Promotions

Facebook & LinkedIn: @bluewaterenterprises

Instagram: @bluewater_gadgets

*Bluewater Enterprises reserves the right to change product specifications or discontinue items without prior notice. Product details are provided as a guide and may vary from actual items.



Scan our QR code to view our full product range online, or visit www.bluewatergadgets.com