

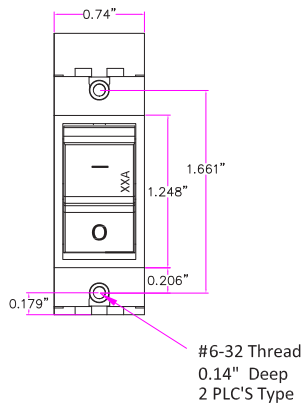
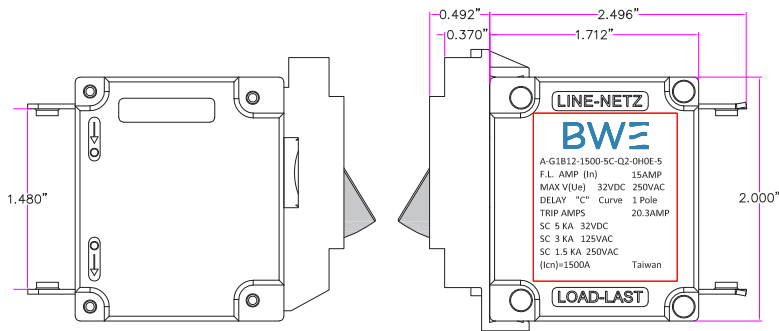
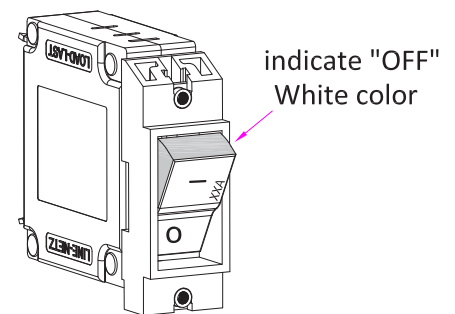




2 poles(one per multiple unit)



Operating Device	Two color Flat Rocker
Bracket	Snap-in rocker bracket
Number of Poles	1 pole ; 2 poles(one per multiple unit)
Rated Current	2.5A --- 50A
Maximum Voltage	240 VAC ; 65VDC
Interrupt Capacity	3000A @ 125VAC 1500A @ 250VAC 5000A @ 32VDC
Ambient Temperature	-40°C to +85°C
Circuit Breaker Type	Hydraulic-Magnetic - trip free
Mounting Screw	#6-32 Stainless Steel
Mounting Screw Torque	6 in-lb (0.68 Nm)
Terminal Screws	#10-32 Stainless Steel
Terminal Screws Torque	14 in-lb (1.58 Nm)
Mechanical Endurance Switching cycles	10,000 ON-OFF operations @ 6 per minute;


Panel Cutout Detail



Time Current Operating Characteristics



Current	100%	125%	150%	200%	400%	600%
Delay Type	No trip	2.0-60	1.3-38	1.0-18	0.15-2	0.04-1
C	No trip	2.0-60	1.3-38	1.0-18	0.15-2	0.04-1

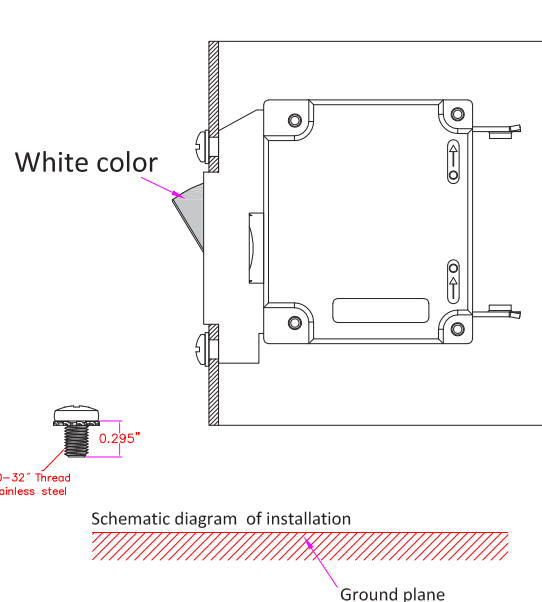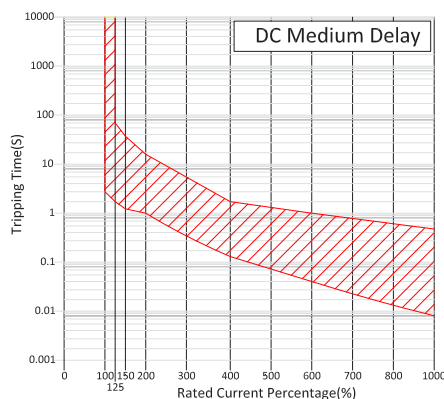

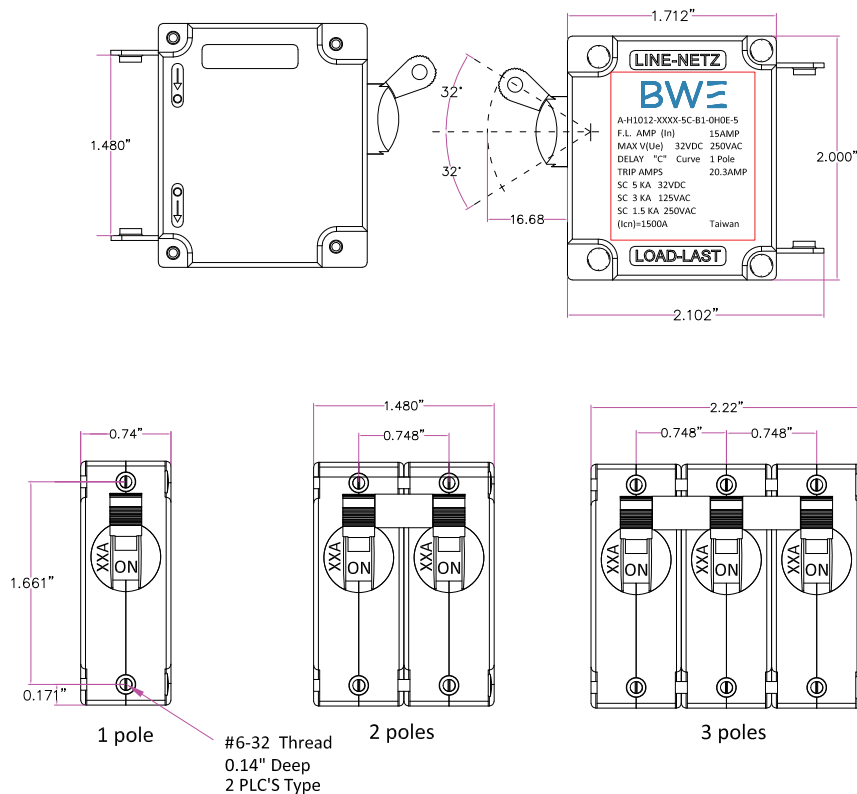



Operating Device	Toggle
Bracket	None
Number of Poles	1 ; 2 ; 3 (one per pole)
Rated Current	2.5A --- 50A
Maximum Voltage	240 VAC ; 65VDC
Interrupt Capacity	3000A @ 125VAC 1500A @ 250VAC 5000A @ 32VDC
Ambient Temperature	-40°C to +85°C
Circuit Breaker Type	Hydraulic-Magnetic - trip free
Mounting Screw	#6-32 Stainless Steel
Mounting Screw Torque	6 in-lb (0.68 Nm)
Terminal Screws	#10-32 Stainless Steel
Terminal Screws Torque	14 in-lb (1.58 Nm)
Mechanical Endurance Switching cycles	10,000 ON-OFF operations @ 6 per minute;

Panel Cutout Detail

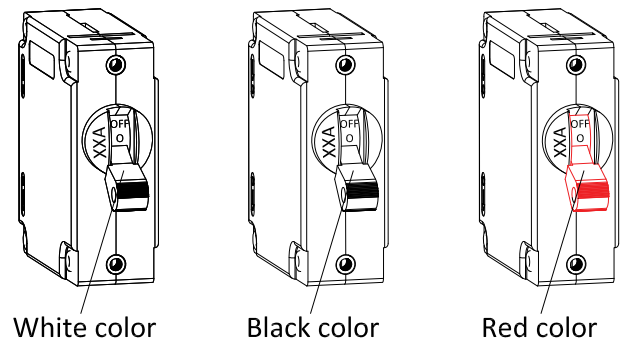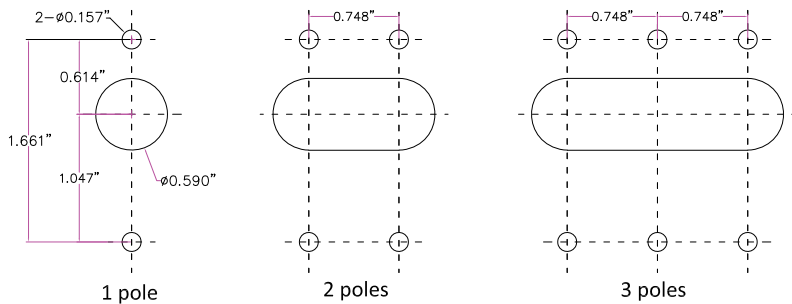

Time Current Operating Characteristics

Current	100%	125%	150%	200%	400%	600%
Delay Type	No trip	2.0-60	1.3-38	1.0-18	0.15-2	0.04-1
C	No trip	2.0-60	1.3-38	1.0-18	0.15-2	0.04-1

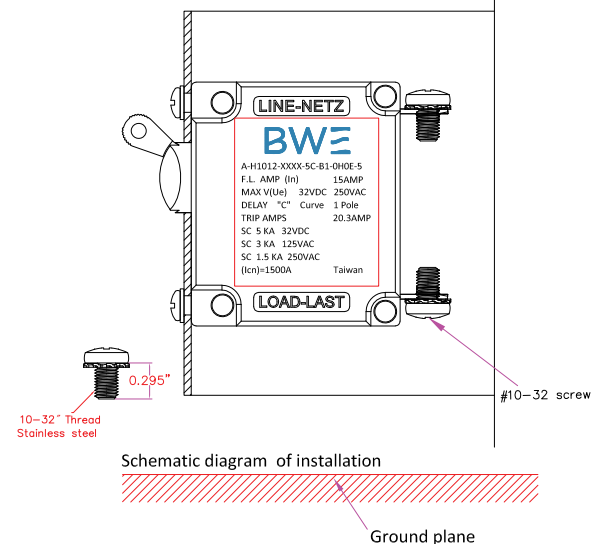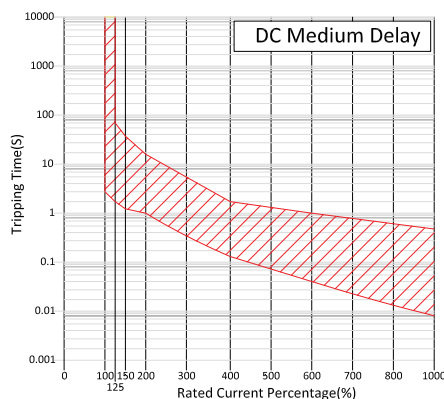

Ordering Guide

A-Series Circuit Breaker



Sample
Order

A - B T - R - 15 - 2

Section

1

2

3

4

5

6

1. Series

A

*In production
and will be
available soon.

2/3. Actuator

BT=Toggle

FR=Flat Rocker

RR=Raised Rocker*

RO=Restricted Off

4. Color

W=White

B=Black

R=Red

5. Amperage

2.5=2.5 Amps

20=20 Amps

40=40 Amps

05=5 Amps

25=25 Amps

50=50 Amps

10=10 Amps

30=30 Amps

15=15 Amps

35=35 Amps

6. Poles

1=One Pole

2=Two Pole*

3=Three Pole*

*Coming Soon:
Raised Rocker
(Finger Guard)

