

BLUEWATER
ENTERPRISES


•
•
•
•
•
•

2025

PRODUCT CATALOG

Delivering Quality Electronics
at Affordable Prices






WELCOME ABOARD



At **Bluewater Enterprises**, we believe that quality marine electronics should not come at the expense of affordability. That is why we are committed to delivering rugged, reliable gear built to thrive in even the most demanding marine environments, whether you are refitting a vessel or starting fresh from the deck up.

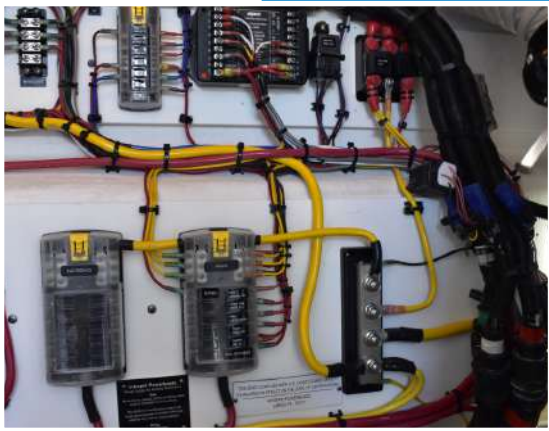

We understand what the sea throws at you. That is why every component, from our switches to our cabling, is built to withstand salt, spray, and time.

What you'll find inside

- Marine-Grade Switches
- High-Performance Busbars
- Compact, Rugged Couplers
- Customizable Actuators
- Durable NMEA Cables
- And More



TABLE OF CONTENTS



Power Distribution



**PG
04**

Battery Switches, Busbars, Circuit Breakers, and Relays built for safe, reliable power in demanding marine conditions.

Switches



**PG
32**

Durable **Mechanical** and **Electronic Switches** designed for precision control and long-term marine use.

Connectors & Interfaces



**PG
58**

Marine-grade **Deutsch Connectors** and **Receptacles** for secure, watertight electrical connections.

Marine Data & Networking



**PG
70**


NMEA 2000 Cables for fast, reliable marine network connectivity—plug-and-play ready.

Mounting & Protection



**PG
76**

Rubber Boots, Seals, and Components that protect your gear and ensure a secure fit.




POWER DISTRIBUTION

Power where it counts. Protection when it matters.

Your electrical system is only as strong as the components behind it. From **Battery Switches** to **Circuit Breakers**, **Busbars**, and **Relays**, our power distribution products manage current safely, isolate loads, and protect critical systems. Designed for the harsh realities of the marine environment such as salt spray, vibration, and time, every component is **built to perform** when it matters most. Whether wiring a new vessel or upgrading an older system, this is where reliable power begins.


Product Category	Page #
Battery Switches	6-11
Busbars	12-21
Circuit Breakers	22-29
Relays	30-31

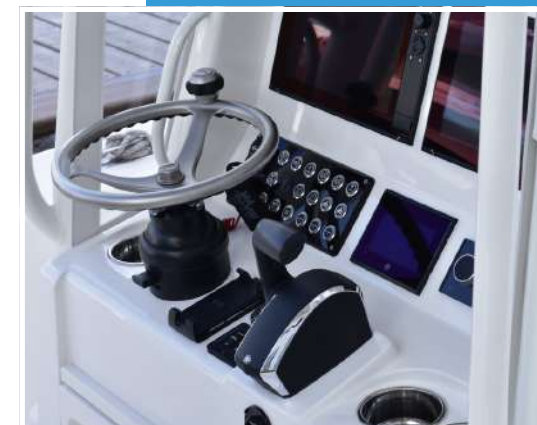

BATTERY SWITCHES

Bluewater Enterprises offers high quality **Battery Switches** for marine power management. Built with **corrosion-resistant materials**, they ensure **secure connections** and **efficient distribution**. Engineered for durability and safety, our switches keep your boat powered and ready.

Great For: Reliable power management, battery isolation, and safe high-current handling with secure connections.



Battery Switches **MOQ** specified in product details.

VOLTAGE & CABLES

All Non-Motorized Switches

Max Voltage: 48VDC
Cable Size: 4/0 AWG

All Motorized Switches

Max Voltage: 16VDC
Cable Size: 26 AWG
Multipurpose 5 Wire



9800-006-10
Panel Mount
9800-006-11
Surface Mount

ON/OFF SWITCH

- Single Circuit Switch
- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.17"

Continuous Rating: 300 Amps DC
Intermittent Rating: 500 Amps DC (5 min)
Cranking Rating: 900 Amps DC (30 sec)
MOQ: 10



9800-007-10
Panel Mount
9800-007-11
Surface Mount

OFF/1/2/BOTH SWITCH

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.17"

Continuous Rating: 300 Amps DC
Intermittent Rating: 500 Amps DC (5 min)
Cranking Rating: 900 Amps DC (30 sec)
MOQ: 10



9800-008-10
Panel Mount
9800-008-11
Surface Mount

OFF/1/2 SWITCH

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.17"

Continuous Rating: 300 Amps DC
Intermittent Rating: 500 Amps DC (5 min)
Cranking Rating: 900 Amps DC (30 sec)
MOQ: 10



9800-010-10
Panel Mount
9800-010-11
Surface Mount

ON/OFF DUAL CIRCUIT SWITCH

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.17"

Continuous Rating: 300 Amps DC
Intermittent Rating: 450 Amps DC (5 min)
Cranking Rating: 675 Amps DC (30 sec)
MOQ: 10



9800-011-10
Panel Mount
9800-011-11
Surface Mount

ON/OFF DUAL CIRCUIT PLUS SWITCH

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.17"

Continuous Rating: 300 Amps DC
Intermittent Rating: 450 Amps DC (5 min)
Cranking Rating: 675 Amps DC (30 sec)
MOQ: 10



9800-7101-00

AUTO CHARGING RELAY

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.17"
- Automatically combines batteries when charging and isolates when not

Continuous Rating: 125 Amps
Intermittent Rating: 140 Amps
MOQ: 10



MOTORIZED 32 VOLT SWITCH

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.13"
- Available with Black, Red, or Yellow Knobs

Continuous Rating: 300 Amps DC
Intermittent Rating: 500 Amps DC (5 min)
Cranking Rating: 900 Amps DC (30 sec)
MOQ: N/A



9800-206-11

2 STUD MOTORIZED BATTERY SWITCH OR VSR

VSR automatically connects or disconnects batteries based on voltage; a 2-stud switch can function as one if wired accordingly.

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.13"
- Available with Black, Red, or Yellow Knobs

Continuous Rating: 300 Amps DC
Intermittent Rating: 500 Amps DC (5 min)
Cranking Rating: 900 Amps DC (30 sec)
MOQ: N/A



9800-211-11

4 STUD MOTORIZED BATTERY SWITCH W/ VSR

VSR automatically connects or disconnects batteries based on voltage level and is rated for 300 amps.

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.13"
- Available with Black, Red, or Yellow Knobs

Continuous Rating: 300 Amps DC
Intermittent Rating: 500 Amps DC (5 min)
Cranking Rating: 900 Amps DC (30 sec)
MOQ: N/A

REMOTE ROCKER SWITCH ORDERING GUIDE

Overview	Part #	Function
Our remote rocker switches pair perfectly with our motorized switches for easy engine control and auxiliary battery charging. A safety slide window prevents accidental shut-offs, while red, green, and yellow LEDs indicate power status.	*2022	(ON)-OFF-(ON)
	2145	(ON)-OFF-(ON)
	2146	ON-OFF-ON
	2155-C	ON-ON

*All rocker switches have two lights, but the 2022 model features dual-color lighting.



REMOTE ROCKER SWITCH W/ SLIDE WINDOW



- LED Power Indicators (Red, Yellow, Green)
- Safety Window
- 1.97" H x 1.0" W

Tab size: .250
Control rating: 20A @4-14V / 15A @ 15-28V
MOQ: N/A

SOLENOID REMOTE SWITCH WIRE SIZE AND CURRENT RATINGS

Wire Size	Cranking 30 Sec.	Intermittent 5 Min.	Continuous (UL 1107)
2/0 AWG (70mm2)	1,000A	400A	225A
4/0 AWG (120mm2)	1,100A	400A	300A
2x4/0 AWG (2x120mm2)	1,450A	700A	500A

SWITCH HOLDER DIAGRAMS

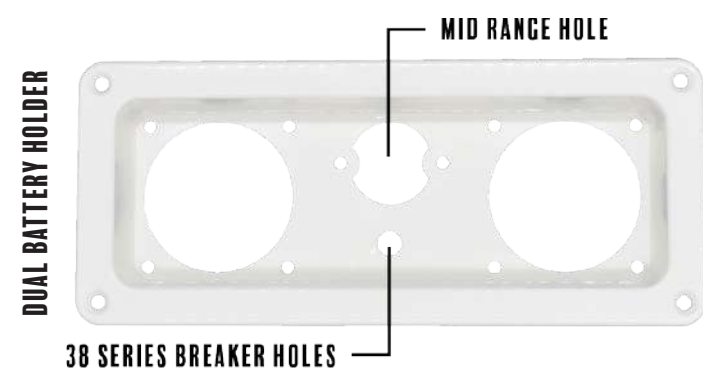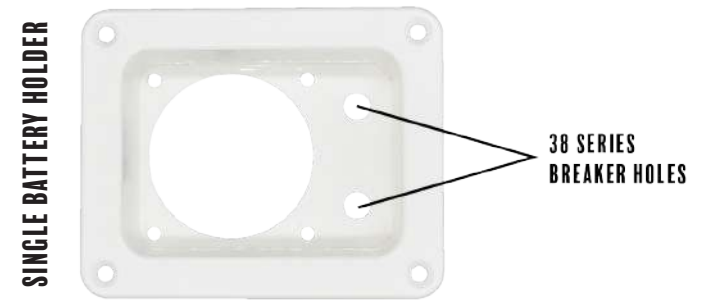

9805-7700-0 (Latching)
9805-7713-0 (Auto Release)

SOLENOID REMOTE SWITCH

- Mounting Holes 0.21"
- Distance Between Mounting Holes: 2.99"

Terminal Stud Size: 3/8" - 16
Control Voltage: 9 -16VDC
MOQ: N/A



SINGLE BATTERY SWITCH HOLDER

- **Standard**
White: 17000-001-001
Black: 17000-001-000
- **With 38 Series Breaker Holes**
White: 17000-002-001
Black: 17000-002-000

MOQ: N/A




9805-7101-0 (Latching)

SOLENOID REMOTE AUTO CHARGING RELAY

- Mounting Holes 0.19"
- Distance Between Mounting Holes: 2.13"

Terminal Stud Size: 3/8" - 16
Control Voltage: 9 -16VDC
MOQ: N/A

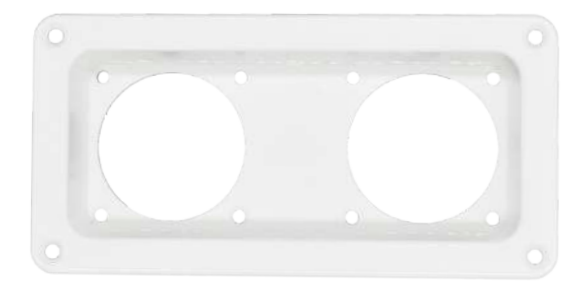

DUAL BATTERY SWITCH HOLDER


- **Standard**
White: 17000-003-001
Black: 17000-003-000
- **With 38 Series Breaker Holes**
White: 17000-004-001
Black: 17000-004-000
- **With Mid-Range & 38 Series Breaker Holes**
White: 17000-005-001
Black: 17000-005-000

MOQ: N/A

COMMON BUSBARS

Bluewater Enterprises offers **Heavy Duty** and **Common Busbars, Sealed Busbars,** and **Power Posts** designed for secure power distribution in marine systems. Available in **multiple amperage** options, these units handle high currents reliably, resist harsh conditions, and are easy to install.

Great For: Reliable Marine Power Distribution, Reducing Wiring Clutter, and Handling 100A to 600A With Secure Connections.



Busbar **MOQ** specified in product details.



5 POSITION BUSBAR 100 AMP

- 1/4" Stud Size Stainless Steel
- Mounting Holes 0.20"
- Distance Between Mounting Holes: 3.56"
- Take 5.32" Pan Head Machine Screws

Max Voltage: 300V/48VDC
Current Rating: 100 A
MOQ: 16 / Cover (25)



TERMINAL BLOCK STYLE 10 GANG - 150 AMP

- 1/4" Stud Size Stainless Steel
- Mounting Holes 0.21"
- Distance Between Mounting Holes: 5.25"
- Take 5.32" Pan Head Machine Screws

Max Voltage: 300V/48VDC
Current Rating: 150 A
MOQ: 10 / Cover (25)



TERMINAL BLOCK STYLE 20 GANG - 150 AMP

- 1/4" Stud Size Stainless Steel
- Mounting Holes 0.21"
- Distance Between Mounting Holes: 8.25"
- Take 5.32" Pan Head Machine Screws

Max Voltage: 300V/48VDC
Current Rating: 150 A
MOQ: 10 / Cover (25)



TERMINAL BLOCK STYLE 12 GANG - 250 AMP

- 1/4" Stud Size Stainless Steel
- Mounting Holes. 0225"
- Distance Between Mounting Holes: 8.50"
- Take 5/32" Pan Head Machine Screw

Max Voltage: 300V/48VDC
Current Rating: 250 A
MOQ: 10 / Cover (20)



TERMINAL BLOCK STYLE 10 GANG - 150 AMP DUAL STUDS

- 5/16" Stud Size Stainless Steel
- Mounting Holes 0.20"
- Distance Between Mounting Holes: 1.88"
- Take 5/32" Pan Head Machine Screw

Max Voltage: 300V/48VDC
Current Rating: 150 A
MOQ: 10



RGB BUSBAR

- Mounting Holes. 0.0225"
- Distance Between Mounting Holes: 4.5"
- Take 5/32" Pan Head Machine Screw

Max Voltage: 300V/48VDC
Current Rating: 100 A
MOQ: 10

COMMON BUSBARS

B



Cover
312301-B-021



Red Base
312303-B-025



Black
312303-B-020


COMMON STUD BUSBAR 4 GANG

- 1/4" Stud Size Stainless Steel
- Mounting Holes 0.21"
- Distance Between Mounting Holes: 5.25"

Max Voltage: 300V/48VDC

Current Rating: 150 A

MOQ: 10

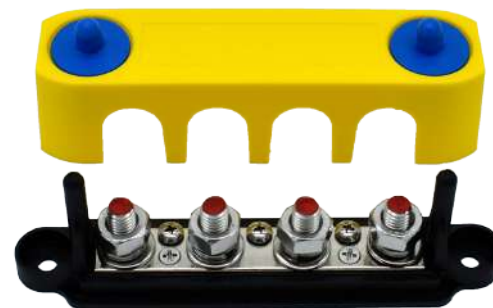

313738-B-023

COMMON STUD BUSBAR 4 GANG - POSITIVE TERMINAL BLOCK

- 3/8" Terminals
- Mounting Holes. 0.25"
- Distance Between Mounting Holes: 5.7"
- Take 5/32" Pan Head Machine Screw

Max Voltage: 300V/48VDC

Current Rating: 250 A

MOQ: 10



312315-B-004



Red Cover
312315-B-205



Black Cover
312315-B-104

HEAVY DUTY STUD BUSBAR 4 GANG

- 3/8"-16 Stud Size Stainless Steel
- Mounting Holes
- Distance Between Mounting Holes: 6.26"

Max Voltage: 300V/48VDC

Current Rating: 600 A

MOQ: 5



313756-B-023

COMMON STUD BUSBAR 4 GANG - NEGATIVE TERMINAL BLOCK

- 5/16" Terminals
- Mounting Holes. 0.25"
- Distance Between Mounting Holes: 5.7"
- Take 5/32" Pan Head Machine Screw

Max Voltage: 300V/48VDC

Current Rating: 250 A

MOQ: 10



312315-B-008



Cover 312315-B-108

HEAVY DUTY STUD BUSBAR 8 GANG

- 3/8"-16 Stud Size Stainless Steel
- Mounting Holes
- Distance Between Mounting Holes: 11.13"

Max Voltage: 300V/48VDC

Current Rating: 600 A

MOQ: 5



313856-B-023

DUAL 4 GANG BUSBAR

- 3/8" And 5/16" Terminals
- Mounting Holes. 0.25"
- Distance Between Mounting Holes: 5"
- Take 5/32" Pan Head Machine Screw

Max Voltage: 300V/48VDC

Current Rating: 250 A

MOQ: 6

B



312311-B-020

Cover: 312311-B-021

DUAL STUD BUSBAR 3/8"

- 3/8" Terminals
- Mounting Holes: 0.225"
- Distance Between Mounting Holes: 1.425"

Max Voltage: 48VDC
Current Rating: 200 A
MOQ: 5



3/8: 312311-A-024
5/16: 312311-A-025

DUAL STUD BUSBAR COPPER LINK

- 3/8" And 5/16" Terminals Available
- Mounting Holes: 0.225"
- Distance Between Mounting Holes: 1.425"

Max Voltage: 48VDC
Current Rating: 200 A
MOQ: N/A



312311-B-008

LINK BAR DUAL 10MM 3/8-3/8 COPPER NICKEL PLATED



314300-R-038

POWER POST RED 3/8"

- 3/8" Terminals
- Mounting Holes 0.225"
- Distance Between Mounting Holes: 1-5/16"

Max Voltage: 48VDC
Current Rating: 250 A
MOQ: N/A



314300-B-038

POWER POST BLACK 3/8"

- 3/8" Terminals
- Mounting Holes 0.225"
- Distance Between Mounting Holes: 1-5/16"

Max Voltage: 48VDC
Current Rating: 250 A
MOQ: N/A



314300-B-516

POWER POST BLACK 5/16"

- 5/16" Terminals
- Mounting Holes 0.225"
- Distance Between Mounting Holes: 1-5/16"

Max Voltage: 48VDC
Current Rating: 250 A
MOQ: N/A

SEALED BUSBARS

B



DTP04-4P-B4

DTP BUSBAR

- Mating Connector
- Sealed Ip67

Max Voltage: 48VDC
Current Rating: 100 A. 25 A per contact
MOQ: N/A



2324-D-056

SEALED DTP 4 POSITION BUSBAR

- 5/16" Terminals
- Mounting Holes 0.175"
- Distance Between Mounting Holes 4"
- Take 5/32" Pan Head Machine Screw
- Sealed IP67

Max Voltage: 48VDC
Current Rating: 200 A
MOQ: N/A



2314-D-014 (1/4")
 2314-D-056 (5/16")

SEALED DT BUSBAR

- 1/4" Or 5/16" Busbar
- Mounting Holes 0.225"
- Distance Between Mounting Holes 1.7"
- Take 5.32" Pan Head Machine Screws
- Sealed IP67

Max Voltage: 48VDC
Current Rating: 150 A
MOQ: N/A



2314-D-256

SEALED DUAL DT 12 POSITION BUSBAR

- 5/16" Terminals
- Mounting Holes 0.225"
- Distance Between Mounting Holes 3.8"
- Take 5.32" Pan Head Machine Screws
- Sealed IP67

Max Voltage: 48VDC
Current Rating: 300 A
MOQ: N/A



2314-B-000 (Dual Stud)

SEALED FCI BUSBAR

- 5/16" Terminals
- Mounting Holes 0.175"
- Distance Between Mounting Holes 4"
- Take 5/32" Pan Head Machine Screw
- Sealed IP67

Max Voltage: 48VDC
Current Rating: 150 A
MOQ: N/A



TERMINAL STRIPS

B

B



16000-01-0A

SNAP TERMINAL STRIP END PIECE PART A

- Mounting Holes 0.125"
- Distance Between Mounting Holes: 0.40"
- **MOQ:** 25



16000-02-0B

SNAP TERMINAL STRIP SCREW PIECE PART B NICKEL PLATED COPPER

- Mounting Holes 0.125"
- Distance Between Mounting Holes: 0.40"
- Current Rating 30 A
- **MOQ:** 25



16000-03-0T

TWEEZERS FOR SNAP 30A TERMINAL STRIP


- Used for the Disconnection of Terminals



16000-02-0J

30 A TERMINAL STRIP JUMPER NICKEL PLATED COPPER

- **MOQ:** 25

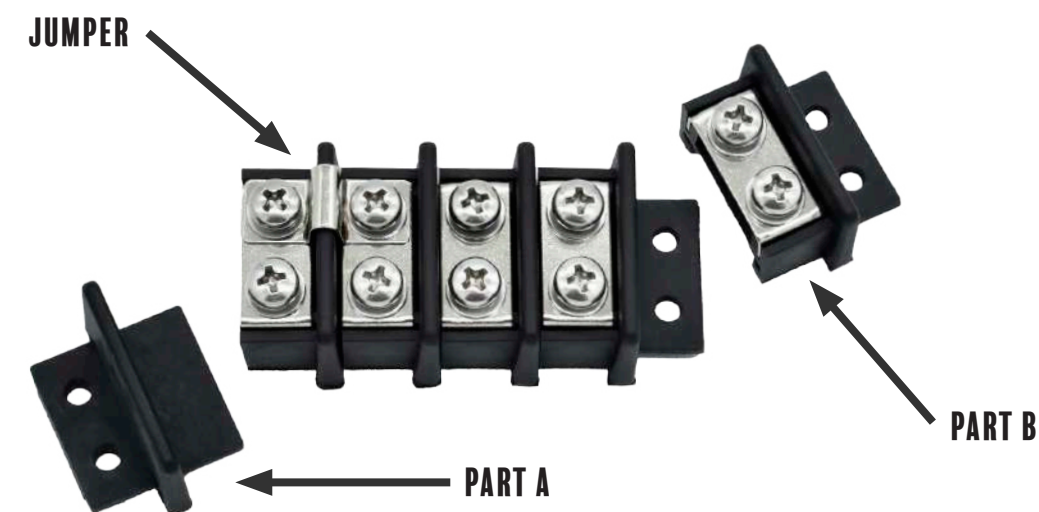


30 A TERMINAL STRIP LAYOUT

- Customize Your Setup to Fit Your Exact Needs
- Combine Part B to Desired Length, Then Cap Off with Part A to Create Terminal Strip
- Easily Link Them Together Using Our Nickel Plated Copper Jumper

CIRCUIT BREAKERS

Bluewater Enterprises offers **Circuit Breakers, Shortstops, Fuses, and Fuse Boxes** for reliable protection in marine systems. Built for **durability** and **performance**, they guard against overloads and shorts in demanding conditions. Available in **multiple ratings**, they suit engines, lighting, and vital on board circuits. These units are easy to install and built to last.

Great For: Reliable Circuit Protection, Simplifying Wiring, and Safely Handling 3A to 250A With Secure Connections.



Circuit Breaker **MOQ** specified in product details.



77000-9600-xxx
*xx indicates amp rating

HIGH AMP PANEL MOUNT

- 1/4" Stud Size Stainless Steel
- Mounting Holes 0.26"
- Distance Between Mounting Holes: 2.2"

Max Voltage: 32VDC/48VDC
Available Amps: 30 - 150A
MOQ: 20



77000-9900-xxx
*xx indicates amp rating

HIGH AMP SURFACE MOUNT

- 1/4" Stud Size Stainless Steel
- Mounting Holes 0.26"
- Distance Between Mounting Holes: 2.1" H / 1.3" W

Max Voltage: 32VDC/48VDC
Available Amps: 30 - 150A
MOQ: 20



Panel Mount
78000-9600-xx
*xx indicates amp rating
Options listed below



Surface Mount
78000-9900-xx
*xx indicates amp rating
Options listed below

MID-RANGE BREAKER

- Mounting Holes 0.09" **Panel Mount**
- Distance Between Mounting Holes: 1.4"
- Mounting Holes 0.23" **Surface Mount**
- Distance Between Mounting Holes: 1.4" H / 0.75" W

Max Voltage: 32VDC
Available Amps: 20, 30, 40, 50, 60A
MOQ: N/A



38-xx-#####-P00NB1
*x indicates amp rating
*# Indicates part option

38 SERIES BREAKER

- Mounting Holes 0.1" (J Hook)
- Distance Between Mounting Holes: 0.44"
- .250 Tab

Max Voltage: 32/50VDC
Current Rating: 3 - 30A
MOQ: 200

HIGH AMP MOUNTS ORDERING GUIDE

Parts Available	77000-9600 Panel Mount 77000-9900 Surface Mount
AMPS Available <small>*indicates only available with surface mount</small>	30,35,40,50,60,70,80,90 100,110,120,*130, 150, *200, *250
Example Order	77000-9900-030 (High Amp Surface Mount) - (30 Amp)

38 SERIES ORDERING GUIDE

Part Options	Black Marked Thermal Breaker P3X16 White Marked Thermal Breaker P3Y16 Black Marked 90 degree screw P3XJ6
AMPS Available	3, 4,5, 6, 7, 8, 10, 12, 15, 20, 25, 30
Example Order	38-03-P3XJ6-P00NB1 (3 Amp) - (Black Marked 90 degree screw)

*Some Part Options Are Not Available With Certain Amperages



SHORT STOPS B ATC FUSES



8700 - xx - #
*x indicates amp
*# Indicates part option

SHORT STOP BREAKER W/ COVER

- 5/16" Stud Size Stainless Steel
- Mounting Holes 0.20"
- Distance Between Mounting Holes: 1.88"
- Take 5/32" Pan Head Machine Screw

Max Voltage: 14VDC/28VDC
Available Amps: 3 - 50A
MOQ: 100





8710-00-00

SHORT STOP BOOT

- Protected Boot / Isolation Cover

SHORT STOP ORDERING GUIDE

Parts Available -XX- for AMP Rating	 Parts #: 8700-XX-1	 Parts #: 8700-XX-2
AMPS Available	5-50	
Example Order	8700-30-2 (Short Stop) - (30 Amp) - (Part 2)	



77011-8000-003
3 Amps

77011-8000-005
5 Amps

MINI ATC RESETTABLE FUSE

- 0.354" H / 0.197" W
- Manual Push Reset
- Single Pole, Normal Closed
- Fuse is color coded to amp ratings

Max Voltage: 58VDC
Available Amps: 3 - 30A
MOQ: 100



77001-8000-xxx

ATC RESETTABLE FUSE

- 1.18" H / 0.78" W
- Manual Push Reset
- Single Pole, Normal Closed
- Fuse is color coded to amp ratings

Max Voltage: 12VDC
Available Amps: 5 - 30A
MOQ: 100

ATC FUSE ORDERING GUIDE

Parts Available	77011-8000 77001-8000
AMPS Available <small>*indicates only available with non-Mini ATC</small>	3, 5, 6, 6.5, 7.5, 10, 15, 20, *25, 30
Example Order	77011-8000-030 (Mini ATC Fuse) - (30 Amp)



3200-2001-006
6 Position

3200-2001-012
12 Position

6 & 12 POSITION BREAKER BLOCK

- M5 main connecting studs
- Mounting Holes 0.1695
- Distance Between Mounting Holes:
6 Position: 3.74" H / 3.54" W
12 Position: 6.61" H / 3.54" W

Max Voltage: 48VDC
Current Rating: 100A (6p) / 200A (12p)
MOQ: N/A



3200-0001-006
6 Position

3200-0001-012
12 Position

6 & 12 POSITION FUSE BLOCK WITH LEDS

- M5 main connecting studs
- Mounting Holes. 0.1695"
- Distance Between Mounting Holes:
6 Position: 2.825" H / 2.725" W
12 Position: 4.725" H / 2.725" W

Max Voltage: 48VDC
Current Rating: 100A
MOQ: N/A



3200-3001-012

12 POSITION ATC FUSE BLOCK WITH LED

- M5 main connecting studs
- Mounting Holes 0.1695
- Distance Between Mounting Holes:
4.85" H / 2.76" W

Max Voltage: 48VDC
Current Rating: 200A
MOQ: N/A



3200-3003-006
6 Position

3200-3003-012
12 Position

6 & 12 POSITION FUSE BLOCK

- M5 main connecting studs
- Mounting Holes. 0.1750"
- Distance Between Mounting Holes:
6 Position: 3.709" H / 2.331" W
12 Position: 5.285" H / 2.325" W

Max Voltage: 48VDC
Current Rating: 100A (6p) / 200A (12p)



3200-100-006
6 Position

3200-100-010
10 Position

6 & 12 POSITION FUSE BLOCK

- M5 main connecting studs
- Mounting Holes. 0.1695"
- Distance Between Mounting Holes:
6 Position: 0.65" H / 1.125" W
10 Position: 1.925" H / 1.125" W

Max Voltage: 48VDC
Current Rating: 100A (6p) / 200A (10p)
MOQ: N/A



3000-4001-00

SAFETY HUB

- M8 main connecting studs
- Mounting Holes. 0.2360"
- Distance Between Mounting Holes:
3.995" H / 4.705" W

Max Voltage: 48VDC
Current Rating: 100A



3200-1101-006

6 POSITION ATC FUSE BLOCK

- M5 main connecting studs
- Mounting Holes 0.1695
- Distance Between Mounting Holes: 3.43" H / 1.25" W

Max Voltage: 48VDC
Current Rating: 100A
MOQ: N/A



3000-1101-012

12 POSITION ATC BREAKER BLOCK

- M5 main connecting studs
- Mounting Holes 0.1695
- Distance Between Mounting Holes: 6.875" H / 1.25" W

Max Voltage: 48VDC
Current Rating: 200A
MOQ: N/A



1200500-0092

IN LINE CIRCUIT BREAKER HOLDER

- Gasket-sealed for waterproof protection
- Clear cap for easy resets
- Mounting tab

MOQ: N/A



1200100-0092
Kit

1200101-0092
Terminal Only

IN LINE FUSE HOLDER

- Sealed IP67
- ATC Fuse Holder
- Mounting Tab

MOQ: N/A



353-11035-C

C-SERIES POWER SELECTOR

MOQ: N/A



1500-909-000

ELCI COVER

MOQ: N/A



1300600-0092

BLACK TOGGLE

MOQ: 100



1300400-0092
Black

1300411-0092
Clear


CIRCUIT BREAKER BOOT

MOQ: 100

SEALED RELAYS

Bluewater Enterprises Sealed Relays and Modules deliver reliable switching power in harsh marine conditions. Rated at 40 or 80 amps, they are built to handle **high current loads** and resist moisture, salt, and vibration. They are ideal for engines, lighting, and other demanding systems. These compact modules make **installation easy**.

Great For: Reliable high-current switching in tough marine conditions.



Relay **MOQ** specified in product details.



40 AMP SEALED RELAY

- IP69 Sealed
- Voltage range: 12 - 24v
- Connecting Studs 2x #10/32

2301-0002-A (**No Hardware**)
2301-0002-B (**w/ Hardware**)
MOQ: 16

- Hardware Includes:**
- 2x #8/32 Nuts
 - 4x #10/32 Nuts



MOTOR REVERSING MODULE

- 4x #10/32 Connecting Studs
- 2x #8/32 Connecting Studs
- IP69 Sealed
- Voltage range: 12 - 24v
- 80 amp reverse

2300-1001-A (**No Hardware**)
2300-1001-B (**w/ Hardware**)
MOQ: 5



80 AMP SEALED RELAY

- IP69 Sealed
- Voltage range: 12 - 24v
- Connecting Studs 2x #10/32


2301-0082-A
MOQ: 16



SENSOR MODULE WASTE TANK PCB

- IP69 Sealed Deutsch connector
- Mounting hole: .20"
- Distance between holes: 2.5"

2301-1777-01
MOQ: 5




SWITCH OPTIONS

Control when you need it. Reliability when it counts.


Your system's control depends on the **switches** that power it. From **Mechanical** to **Electronic Switches**, our products are designed for **precision** and **durability** in demanding marine environments. Engineered to withstand salt spray, vibration, and time, they provide secure and consistent operation for power circuits and critical systems. Available in 19mm or 22mm, these switches ensure reliable performance and easy installation. Tested for millions of cycles; they deliver **long lasting performance** and **ease of installation**. Whether outfitting a new vessel or upgrading an existing one, this is where **dependable control** begins.

Product Category	Page #
Mechanical Switches	34-43
Electronic Switches	44-53
Actuators / Harnesses	54-57

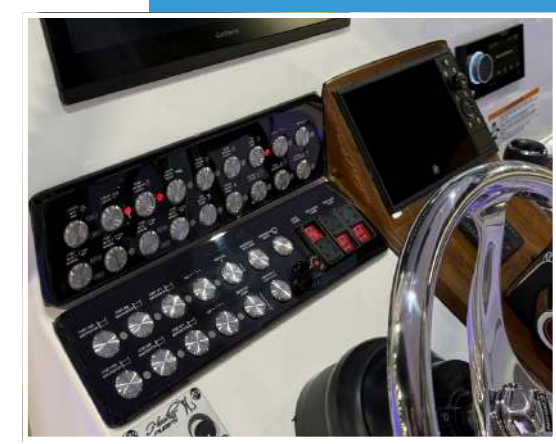

MECHANICAL SWITCHES

Bluewater Enterprises offers durable mechanical switches in **19 mm** and **22 mm** sizes that deliver a solid tactile response in marine environments, along with **pre-assembled wired versions** for easy installation. The wired switches include marine grade leads to save time and ensure consistent performance. Whether integrating into new builds or enhancing existing systems, you can count on our switches for **precise, reliable control**.



MOQ for switches is **50**, unless otherwise listed.

THINGS TO KNOW

- **Mechanical vs. Electrical Switches:**
Mechanical switches toggle or rocker control systems through direct physical connections. Electrical switches use electrical signals to activate components without a direct mechanical link.
- **Back Tabs:**
Switches have different back tab configurations with 2, 3, or more terminals depending on their function. These variations allow for features like LEDs or multiple control positions.
- **Momentary vs. On/Off Functions:**
Momentary switches activate only while pressed, which are ideal for functions like horns or starters.
On/Off switches stay in position and are used for devices like lights and bilge pumps.

SWITCH INDEX

1. **19mm Switches** - Pg. 36 - 37
2. **22mm Switches** – Pg. 38 - 39
3. **19mm Pre-Wired** – Pg. 40 - 42
4. **20mm Pre-Wired** – Pg. 43



19MM SWITCHES

MOQ: 50



BACK TABS



Style: SS w/ Blue Ring
LED Color: Blue
Back Tab: 3
9150-1000 (On/Off)
9150-2000 (Momentary)



Style: Black w/ Blue Ring
LED Color: Blue
Back Tab: 3
9150-1030 (On/Off)
9150-2030 (Momentary)



Style: SS w/ Knob
LED Color: None
Back Tab: 3
9150-1107



Button: Black w/ Translucent Ring
LED Color: Blue
Back Tab: 3
9150-1130 (On/Off)
9150-2130 (Momentary)



Button: SS w/ Translucent Center
LED Color: RGB
Back Tab: 4
9150-1003 (On/Off)
9150-2003 (Momentary)




Button: Machined Head
LED Color: None
Back Tab: 1
9150-1045 (On/Off)
9150-2045 (Momentary)



Button: Black w/ Translucent Ring
LED Color: Red
Back Tab: 3
9150-1131 (On/Off)
9150-2131 (Momentary)



Button: SS w/ Translucent Center
LED Color: Blue/Green
Back Tab: 3
9150-1003-A (On/Off)
9150-2003-A (Momentary)




Button: SS w/ Translucent Ring
LED Color: Blue
Back Tab: 3
9150-1100 (On/Off)
9150-2100 (Momentary)



Button: SS w/ Translucent Ring
LED Color: Blue
Back Tab: 3
9150-1171



Button: Machined Head
LED Color: None
Back Tab: 2
9150-1005 (On/Off)
9150-2005 (Momentary)



Button: SS w/ Translucent Ring
LED Color: RGB
Back Tab: 3
9150-1103 (On/Off)
9150-2103 (Momentary)



Buzzer
Style: Stainless Steel
LED Color: Red
9150-7701
MOQ: 25

Connectors



Connector
Wires: None
19mm
9150-6001
MOQ: 500



Connector
Wires: 6"
19mm
9150-6006
MOQ: 100



RGB Connector
19mm
9150-6306 (6" Wire)
9150-6306C (12" Wire)
MOQ: 20





22MM SWITCHES

MOQ: 50



BACK TABS



Buzzer
LED Color: Red
Back Tab: 1
9050-7701



Switch 3V
Button: SS w/ Translucent Center
LED Color: Blue/Red
Back Tab: 2
9051-7002-003 (Momentary)



Double Lock
Button: SS w/ Blue Ring
LED Color: Blue
Back Tab: 3
9151-1010 (On/Off)



Anti-Vandal Switch
Button: SS w/ Translucent Center
LED Color: Blue/Red
Back Tab: 2
9051-1114 (On/Off)
9051-2114 (Momentary)



Switch w/o Jumpers
Button: SS w/ Translucent Center
LED Color: Blue/Red
Back Tab: 2
9051-7071 (On/Off)




Switch w/Harness
Button: SS w/ Blue Ring
LED Color: Blue
Back Tab: 3
9151-1010-BATT-12 (On/Off)



Switch w/ Jumpers
Button: SS w/ Translucent Center
LED Color: Blue/Red
Back Tab: 2
9051-7001 (On/Off)
9051-7002 (Momentary)



Engine Start/Stop
Button: SS w/ Translucent Ring
LED Color: Green
Back Tab: 4
9052-2008



Button: SS w/ Translucent Ring
LED Color: Red
Back Tab: 3
9151-2001



Switch w/ Jumpers Knurl
Button: SS w/ Translucent Center
LED Color: Blue/Red
Back Tab: 2
9051-7001-009 (On/Off)
9051-7002-009 (Momentary)



Horn
Button: SS w/ Translucent Ring
LED Color: Red
Back Tab: 4
9052-2009 (Momentary)



Double Lock
Button: SS w/ Blue Ring
LED Color: Blue
Back Tab: 3
9151-2010 (Momentary)




Button: SS w/ Translucent Ring
LED Color: Blue
Back Tab: 5
9151-9100-0069 (On/Off)

Connector



Connector
Wires: 12"
22mm
9151-6312
MOQ: 100

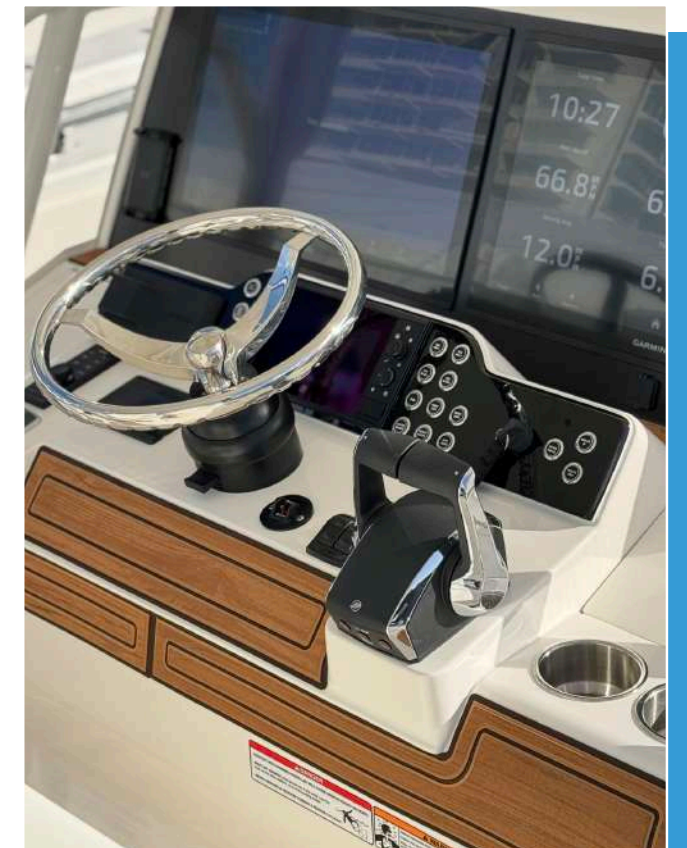

19MM PRE-WIRED

MOQ: 50



Wire Length: 6"
Of Wires: 2
LED Color: None
Button: Non-Machined Face
 9150-1005-106 (On/Off)
 9150-2005-106 (Momentary)



Wire Length: 6"
Of Wires: 3
LED Color: None
Button: Machined Head
 9150-1045-036-C (On/Off)
 9150-2045-036-C (Momentary)



Wire Length: 6"
Of Wires: 3
LED Color: Blue
Button: SS w/ Translucent Ring
 9150-1100-306-DTF (3 Wire) (On/Off)
 9150-2100-306-DTF (3 Wire) (Momentary)



Wire Length: 6"
Of Wires: 3
LED Color: Red
Button: SS w/ Translucent Ring
 9150-1101-306 (On/Off)
 9150-2101-306 (Momentary)



Wire Length: 40"
Of Wires: 3
LED Color: Blue
Button: SS w/ Translucent Center
 9150-1013-403 (On/Off)
 9150-1013-403-1 (w/ Washdown Icon)



Wire Length: 6"
Of Wires: 2
LED Color: None
Button: Machined Head
 9150-1045-106 (On/Off)
 9150-2045-106 (Momentary)




Wire Length: 6"
Of Wires: 5
LED Color: Blue
Button: SS w/ Translucent Ring
 9150-1100-506 (On/Off)
 9150-2100-506 (Momentary)



Wire Length: 6"
Of Wires: 5
LED Color: Red
Button: SS w/ Translucent Ring
 9150-1101-506 (On/Off)
 9150-2101-506 (Momentary)



Wire Length: 6"
Of Wires: 3
LED Color: Blue
Button: Black w/ Blue Ring
 9150-1030A-306 (On/Off)

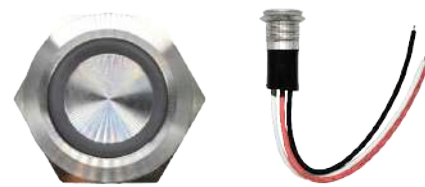

Wire Length: 6"
Of Wires: 3
LED Color: Blue
Button: SS w/ Translucent Ring
 9150-1100-306 (On/Off)
 9150-2100-306 (Momentary)



Wire Length: 6"
Of Wires: 5
LED Color: Blue
Button: SS w/ Translucent Ring
 9150-1100-506-0069 (On/Off)




Wire Length: 6"
Of Wires: 3
LED Color: RGB
Button: SS w/ Translucent Center
 9150-1102-306 (On/Off)

19MM PRE-WIRED CONT.

MOQ: 50



Wire Length: 6"
Of Wires: 5
LED Color: Green
Button: SS w/ Translucent Ring
9150-1102-506 (On/Off)

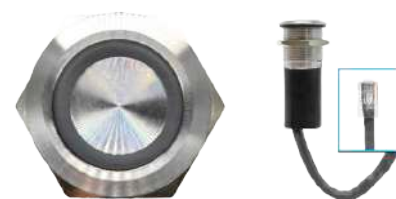

Wire Length: 38"
Of Wires: 1
LED Color: Blue
Button: SS w/ Translucent Ring
9150-2130-301-SS (Momentary)



Wire Length: 5'
Of Wires: 3
LED Color: Blue
Button: SS w/ Translucent Ring
9050-1014 (On/Off)



Wire Length: 6"
Of Wires: 4
LED Color: Red
Button: SS w/ Translucent Ring
9052-2009-106
9052-2009-106-4 (W/DTM06-4S)



Wire Length: 6"
Of Wires: 5 (DTF)
LED Color: Red
Button: SS w/ Translucent Ring
9150-2101-506-DTF (Momentary)



Wire Length: 6"
Of Wires: 1
LED Color: Red
Button: SS w/ Translucent Ring
9150-2131-301 (Momentary)



Wire Length: 6"
Of Wires: 4
LED Color: Red
Button: SS w/ Translucent Ring
9051-1214 (On/Off)
9051-2214 (Momentary)



Wire Length: 38"
Of Wires: 1
LED Color: Blue
Button: Black w/ Blue Ring
9150-2130-301 (Momentary)



Wire Length: 6"
Of Wires: 4
LED Color: Green
Button: SS w/ Translucent Ring
9052-2008-106-4
9052-2009-106-4 (W/DTM06-4S)

22MM PRE-WIRED

MOQ: 50


Accessories



LED Wire
Wire Length: 7.5"
Of Wires: 2
LED Color: Red
1812-1-20-20310

ELECTRONIC SWITCHES

At **Bluewater Enterprises**, we specialize in high quality marine grade electrical solutions designed for reliability in the toughest conditions. Our **22mm** and **19mm Electronic Switches** are a testament to our commitment to **durability, safety, and performance**. With **IP69K** waterproofing, **stainless steel** SS316 construction, and **inrush protection** up to 120A, our switches ensure smooth uninterrupted operation for marine and industrial applications. Built to withstand shock, salt spray, and harsh environments, Bluewater products deliver the dependability you need **when it matters most**.



MOQ for all 22mm switches is set at **20**.





THINGS TO KNOW

- **Programmable Functions:**
Configure a single switch for dimming, multi position control, or timed functions, offering flexibility and space savings.
- **Integrated Feedback:**
Built in LED indicators provide instant visual confirmation of system status, improving safety and ease of use.
- **Custom Actuators:**
Switches can be fitted with black, stainless steel, or translucent actuators and labeled to suit specific functions. See page 54 for available options and details.
- **Low Profile Design:**
With minimal moving parts, electronic switches offer compact, modern styling and increased resistance to wear and corrosion.




SWITCH INDEX

1. **9059 Series (22mm)** - Pg. 46 - 49
2n1 Inrush Switch - Pg 46 - 47
22 mm Inrush Switch - Pg 48 - 49
2. **9060 Series (22 mm)** – Pg. 50 - 51
Programmable Inrush Switch
3. **9057 Series (19mm)** – Pg. 52 - 53
19mm Electronic Switch
4. **Actuators / Harnesses** – Pg. 54 - 57

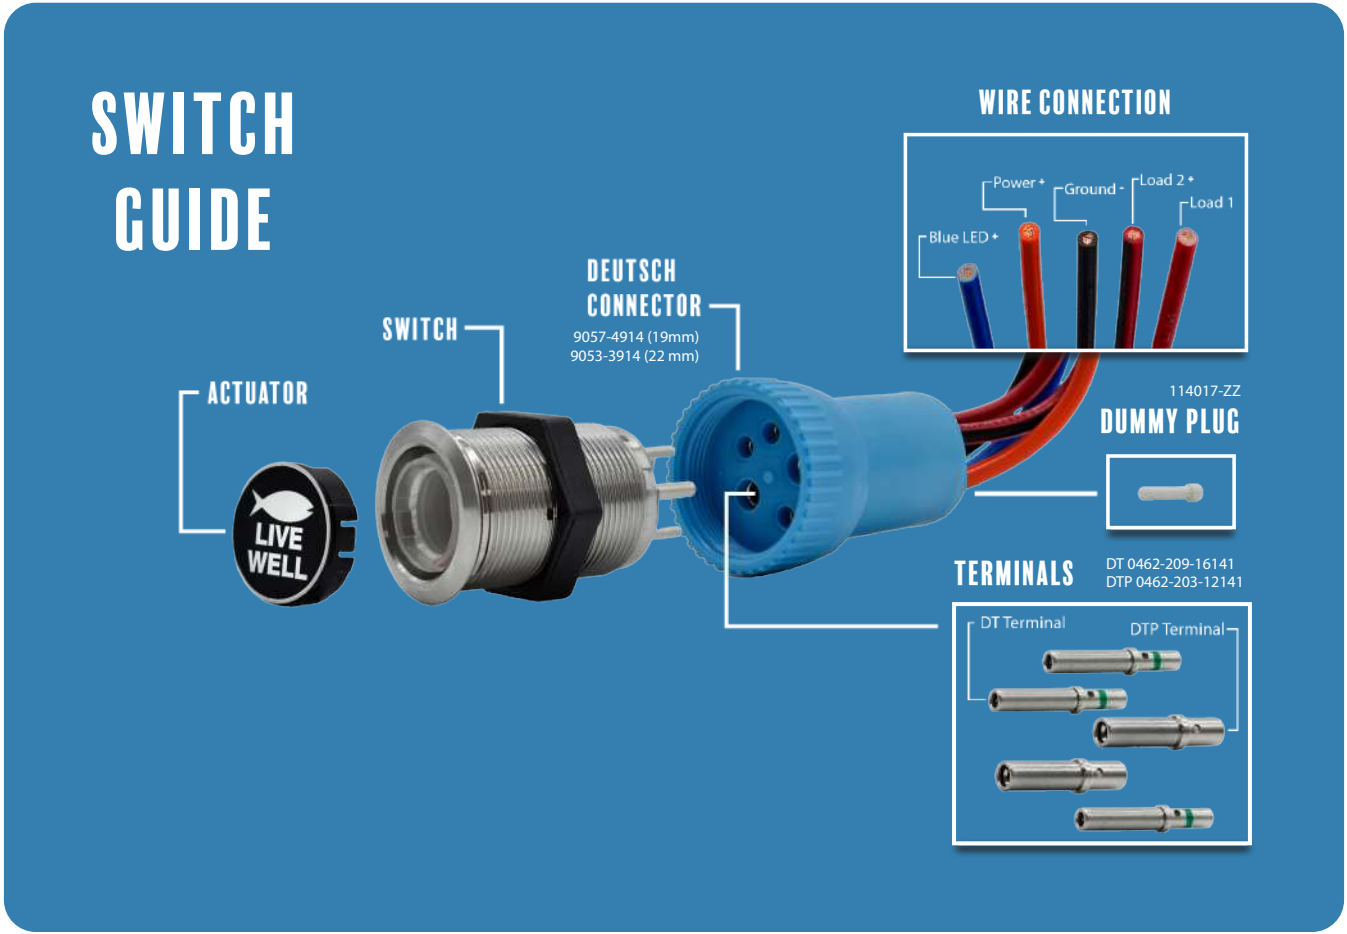

2N1 INRUSH SWITCH

Upgrade your marine setup with the **2N1 Inrush Switch** built to handle demanding electrical loads with seamless control. Featuring **dual pushbuttons** for two outputs or up down functions, this rugged switch boasts **IP69K** waterproofing stainless steel construction and 120A inrush protection for ultimate **reliability**. Designed to withstand salt spray extreme shocks and harsh marine conditions it delivers precision strength and safety because on the water **every connection counts**. Whether you're powering critical systems or fine-tuning performance, the 2N1 ensures **you're always in command**.



MOQ for all 22mm switches is set at **20**.

FEATURES


- Powerful Performance:**
2 x 10A per channel, 20A max.
- Dual Control:**
Two pushbuttons for dual outputs or up/down control
- Marine-Grade Toughness:**
SS316 stainless steel body, IP69K waterproof
- Built for the Elements:**
Salt spray tested (EN ISO 9227-17)
- Shockproof:**
Withstands 20g bump shocks
- Fire-Resistant:**
UL 94 V2 flammability rating, heat-rated to 105°C

QUICK GUIDE

N/O: Normally Open N/C: Normally Close 2 Output Function	Parts No.	Page #	Power On	Press & Hold	Press	Press & Hold 2 buttons
1. N/O (ON) 2. N/O (ON)	9059-7002	8				
1. N/C (OFF) 2. N/C (OFF)	9059-7004	8				
1. N/C (ON) 2. N/O (OFF)	9059-7006	8				
1. N/O - On/Off 2. N/O - On/Off	9059-7009	8				
1. N/O - On/Off 2. N/C (OFF)	9059-7012	9				
1. N/O - On/Off 2. N/C (OFF)	9059-7013	9				
1. N/O - On/Off 2. N/O - On/Off NAV/ANC	9059-7014	9				
1. N/C - Dim Up 50% --> 100% 2. N/C - Dim Dn 50% --> 5% DIMMER PWM	9059-7015	9				

22MM INRUSH SWITCH

Upgrade your boat’s electrical system with the **22mm Inrush Protection Switch** - built tough for marine conditions and engineered for seamless operation. Featuring **ultra-bright LED indicators, a waterproof stainless steel body, and high-load surge protection up to 120A**, this switch keeps your systems running safely and efficiently. Whether you need reliability for critical functions or a sleek, professional look, Bluewater’s switch delivers both. They are easy to install, impact-resistant, and designed to last, because when you’re on the water, **only the best will do.**



MOQ for all 22mm switches is set at **20**.



9059 Series

FEATURES


- **Power Capacity:**
20A max (1 channel) | 10A max per channel (2 channels)
- **Night Visibility:**
Blue LED back light for clarity; turns red when active
- **Built to Last:**
SS316 stainless steel body, IP69K waterproof rating
- **Extreme Durability:**
Salt spray (EN ISO 9227-17) & 20g shock tested
- **Heat & Safety:**
UL 94 V2 flammability-rated, withstands up to 105°C

QUICK GUIDE

Function	Parts No.	Page #	Off	1st On	2nd On	3rd On	Rear Mark Page
Off-On	9059-1113	1	(Blue)	Red	X	X	Red Dot
Off- (On)	9059-2113	1	(Blue)	Red	X	X	Green Dot
NAV/ANC	9059-3114	2	(Blue)	Green	Red	X	White Dot
Off-On-On	9059-3113	2	(Blue)	Green	Red	X	Blue Dot
Off-On-On-Both	9059-3115	3	(Blue)	Green	Red	Yellow	Yellow Dot
Off-(On)-(On)	9059-2123	3	(Blue)	Green	Red	X	Green Dot
Off-(On)	9059-2213	4	(Red)	Red	X	X	Green Dot
Auto NAV Photo Sensor	9059-3734	4	(Blue)	Green	Red	Yellow	White Dot
Timer ON (1 min G) OFF (2min Y)	9059-1555	5	(Blue)	Red	Green	Yellow	Red Dot
Timer ON (2 min RED) --> OFF	9059-1555F	5	(Blue)	Red	X	X	Red Dot
Dimmer	9059-3116	6	(Blue)	Red	X	X	Green Dot
3-way Switch	9059-5113	7	(Blue)	Red	X	X	Red Dot
Off-(On) Ground	9059-2713	8	(Blue)	Red	Purple		Purple Dot
Off-On Ground	9059-1713	8	(Blue)	Red	Purple		Purple Dot
Off-(On) Signal	9059-2118	9	(Blue)	Red	Purple		Green Dot
On-(Off)	9059-2913	9	Red	(Blue)	X	X	Green Dot

22MM PROGRAMMABLE SWITCH

Upgrade your marine electrical system with the **22mm Programmable Switch**, offering 8 adjustable amp settings and easy press-and-hold setup. Built with SS316 stainless steel, **IP69K** waterproofing, and **inrush protection** up to 120A, it's made for harsh marine conditions. A Red LED indicator provides instant feedback when the pump is running. Its **compact design** fits tight panels without compromising performance, giving you smart control in any environment.



MOQ for all 22mm switches is set at **20**.

FEATURES

- Flexible Power Options:**
20A max (1 channel) or 10A per channel (2 channels)
- Customizable Protection:**
8 programmable amp settings including 3, 5, 6, 7.5, 10, 15, 20, and 0
- Easy Setup:**
Adjust breaker current with a simple press-and-hold
- Inrush Protection:**
Handles 120A surges for 120µs before fault mode
- Marine-Grade Durability:**
SS316 stainless steel, IP69K waterproof, salt spray & shock tested

QUICK GUIDE

Function	Parts No.	Page #	Off	1st On	2nd On	3rd On	Rear Mark Page
Off- On	9060 - 1113	26	(Blue)	Red	X	X	Red Dot
Off - (On)	9060 - 2113	26	(Blue)	Red	X	X	Green Dot
NAV/ANC	9060 - 3114	26	(Blue)	Green	Red	X	White Dot
Off - On - On	9060 - 3113	27	(Blue)	Green	Red	X	Blue Dot
Off - On - On - Both	9060 - 3115	27	(Blue)	Green	Red	Yellow	Yellow Dot
Off - (On) - (On)	9060 - 2123	27	(Blue)	Green	Red	X	Green Dot


19MM ELECTRONIC SWITCH

Upgrade your boat’s electrical system with the **19mm Marine-Grade Switch**, built for durability and precision. It features smart **LED indicators**, glowing blue for back lighting and red when active for clear visibility. Designed for 15A single-channel or 7.5A dual-channel use, it’s housed in SS316 stainless steel with an **IP69K** waterproof rating, ensuring **reliability in harsh marine conditions**.



FEATURES

- **Power & Performance:**
15A max (1 channel) or 7.5A per channel (2 channels)
- **Smart LED Indicators:**
Blue back light at night, red LED when function is active
- **Marine-Grade Durability:** SS316 stainless steel body with IP69K waterproofing
- **Built for Harsh Conditions:**
Salt spray resistant and 20g shock-tested
- **High Safety Standards:**
UL 94 V2 flammability rated, heat-resistant to 105°C



MOQ for all 19mm switches is set at **32**.

QUICK GUIDE



Function	Parts No.	Page #	Off	1st On	2nd On	Rear Mark Page
Off- On	9057 - 1113	26	(Blue)	Red	X	Red Dot
	9057 - 1123	26	(Green)	Blue	X	
Off - (On)	9057 - 2113	26	(Blue)	Red	X	Green Dot
	9057 - 2133	27	(Green)	Blue	X	
Off - (On) - (On)	9057 - 2123	27	(Blue)	Green	Red	Green Dot with a line
	9057 - 2223	27	(Green)	Blue	Red	
Off - On - On	9057 - 3113	28	(Blue)	Green	Red	Blue Dot
	9057 - 3123	28	(Green)	Blue	Red	
NAV/ANC	9057 - 3114	29	(Blue)	Green	Red	White Dot
Dimmer	9057 - 3116	29	(Blue)	Red	X	Black Dot



CUSTOMIZABLE
ACTUATORS





































































































































Replaceable Actuators Available


































































































































































































Style	Parts No.
Full Translucent	9451-1001
Stainless Steel Ring	9451-1002
Laser Logo (Black)	9451-1005

All actuators come in **laser-engraved** or **UV-printed** designs for lasting durability. Choose laser engraving for a sleek, fade-resistant finish or UV printing for bold, high-contrast visibility—both **built to withstand tough marine conditions**.

For **19mm** actuators, use product number **9551** before your selected actuator code; add **UV** at the end for UV printing (E.g., **9551-0074UV**)

For **22mm** actuators, use product number **9451** before your selected actuator code; add **UV** at the end for UV printing (E.g., **9451-0074UV**)

 0001	 0002	 0003	 0004	 0005	 0006	 0007	 0008	 0009	 0010	 0011	 0012
 0013	 0014	 0015	 0016	 0017	 0018	 0019	 0020	 0021	 0022	 0023	 0024
 0025	 0026	 0027	 0028	 0029	 0030	 0031	 0032	 0033	 0034	 0035	 0036
 0037	 0038	 0039	 0040	 0041	 0042	 0043	 0044	 0045	 0046	 0047	 0048
 0049	 0050	 0051	 0052	 0053	 0054	 0055	 0056	 0057	 0058	 0059	 0060
 0061	 0062	 0063	 0064	 0065	 0066	 0067	 0068	 0069	 0070	 0071	 0072
 0073	 0074	 0075	 0076	 0077	 0078	 0079	 0080	 0081	 0082	 0083	 0084
 0085	 0086	 0087	 0088	 0089	 0090	 0091	 0092	 0093	 0094	 0095	 0096
 0097	 0098	 0099	 0100	 0101	 0102	 0103	 0104	 0105	 0106	 0107	 0108
 0109	 0110	 0111	 0112	 0113	 0114	 0115	 0116	 0117	 0118	 0119	 0120
 0121	 0122	 0123	 0124	 0125	 0126	 0127	 0128	 0129	 0130	 0131	 0132

 0133	 0134	 0135	 0136	 0137	 0138	 0139	 0140	 0141	 0142	 0143	 0144
 0145	 0146	 0147	 0148	 0149	 0150	 0151	 0152	 0153	 0154	 0155	 0156
 0157	 0158	 0159	 0160	 0161	 0162	 0163	 0164	 0165	 0166	 0167	 0168
 0169	 0170	 0171	 0172	 0173	 0174	 0175	 0176	 0177	 0178	 0179	 0180
 0181	 0182	 0183	 0184	 0185	 0186	 0187	 0188	 0189	 0190	 0191	 0192
 0193	 0194	 0195	 0196	 0197	 0198	 0199	 0200	 0201	 0202	 0203	 0204
 0205	 0206	 0207	 0208	 0209	 0210	 0211	 0212	 0213	 0214	 0215	 0216
 0217	 0218	 0219	 0220	 0221	 0222	 0223	 0224	 0225	 0226	 0227	 0228
 0229	 0230	 0231	 0232	 0233	 0234	 0235	 0236	 0237	 0238	 0239	 0240
 0241	 0242	 0243	 0244	 0245	 0246	 0247	 0248	 0249	 0250	 0251	 0252
 0253	 0254	 0255	 9451-1019	 9060-1001	 0258	 0259	 0260	 0261	 0262	 0263	 0264
 0265	 0266	 0267	 0268	 0269	 0270	 0271	 0272	 0273	 0274	 0275	 0276
 0277	 0278	 0279	 0280	 0281	 0282	 0283	 0284	 0285	 0286	 0287	 0288
 0289	 0290	 0291	 0292	 0293	 0294	 0295	 0296	 0297	 0298	 0299	 0300
 0301	 0302	 0303	 0304	 9060-1001	 0305	 0306	 0307	 0308	 0309	 0310	 0311
 0312	 0313	 0314	 0315	 0316	 0317	 0318	 0319	 0320	 0321	 0322	 0323
 0324											

SWITCH HARNESS

Great For: Flexible layouts with dual or single output options, ready for any boat.


-
-
-
-

Switch Harness parts do not have an **MOQ**.

Deutsch Switch Harness

Available for both **19mm** and **22mm** switches, our harnesses are built for flexibility and durability in marine environments. Choose the 4 wire option for a **single output**, with a dummy plug included to seal the unused port, or the 5 wire version for **dual outputs**.

We cut to any wire length. Just contact us with what you need.

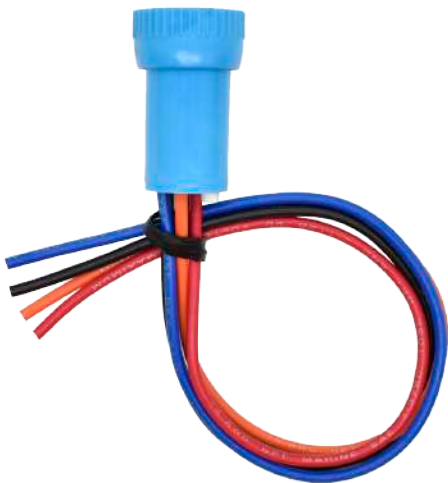

4 Wire / 1 Output Switch Harness



5 Wire / 2 Output Switch Harness

Y-Wire Harness

Our **Y-Wire** harness splits power or signal between two outputs. Built with marine grade materials, it offers a clean and **secure connection in tight spaces**.




Orange Y Wire 12AWG




Blue Y Wire 18AWG



Black Y Wire 18AWG





CONNECTORS & INTERFACES

Reliable connections. Enduring performance.

Reliable connectivity is at the heart of every marine system. From **Deutsch Connectors** to **NMEA 2000 Cables** and waterproof **Receptacles**, our interface solutions are designed for secure signal and power transmission in the harshest conditions. Resistant to corrosion, vibration, and moisture, these components ensure that your systems communicate clearly and perform consistently. Whether you are integrating electronics or maintaining vital connections, this is where dependable performance begins.


Product Category	Page #
Deutsch Connectors	60-63
Receptacles	64-69



DEUTSCH CONNECTORS



Bluewater Enterprises supplies rugged **Deutsch Connectors** for demanding marine environments. Available in **DT, DTM, DTP,** and **DTHD** series in both male and female configurations, these connectors resist moisture, vibration, and corrosion while paired with quality **Terminals** to ensure secure, lasting connections.



Great For: Creating secure, weather-resistant connections for critical wiring in marine and harsh environment applications.





Deutsch
Connectors
MOQ: 100


DT CONNECTORS W/ WEDGE LOCK

• 2 Position
 


DT04-2P (Male)
 DT06-2S (Female)

• 3 Position
 




DT04-3P (Male)
 DT06-3S (Female)



• 4 Position
 









DT04-4P (Male)
 DT06-4S (Female)

• 6 Position
 









DT04-6P (Male)
 DT06-6S (Female)

• 8 Position
 




DT04-8P (Male)
 DT06-08SA (Female)



• 12 Position
 




DT04-12P (Male)
 DT06-12S (Female)
DT06-12SC (Green Body)



DTM CONNECTORS W/ WEDGE LOCK

• 2 Position
 


DTM04-2P (Male)
 DTM06-2S (Female)

• 3 Position
 


DTM04-3P (Male)
 DTM06-3S (Female)

• 4 Position
 





DTM04-4P (Male)
 DTM06-4S (Female)

• 6 Position
 





DTM04-6P (Male)
 DTM06-6S (Female)



TERMINALS B CONNECTORS CONT.

DTP CONNECTORS W/ WEDGE LOCK

• 2 Position



DTP04-2P (Male)



DTP06-2S (Female)

• 4 Position



DTP04-4P (Male)



DTP06-4S (Female)

DTB CONNECTORS W/ WEDGE LOCK

• 20 Position Male



DTB04-20P



• 4 DTP / 16 DT

• 20 Position Female



DTB06-20S



• 4 DTP / 16 DT

SINGLE POSITION CONNECTORS

• 4-6 AWG



DTHD04-1-4P (Male)



DTHD06-1-4S (Female)

• 8 AWG



DTHD04-1-8P (Male)



DTHD06-1-8S (Female)

MALE TERMINALS



DTM 18-20AWG
0460-202-20141
MOQ: 100



DTP 12-14AWG
0460-204-12141
MOQ: 100



Deutsch 8AWG Pin
0460-204-08141
MOQ: 100



Deutsch 4AWG Pin
0460-204-04141
MOQ: 100



DTP Crimp
1060-12-0166
MOQ: 1 Roll (2500)



Stamped DTP Crimp
1060-12-0222
MOQ: 1 Roll (2500)



DT Crimp
1060-14-0122
MOQ: 1 Roll (4000)



Solid 14AWG
0460-215-16141
MOQ: 100

FEMALE TERMINALS



DTM 18-20AWG
0462-201-20141
MOQ: 100



DTP 12-10AWG
0462-203-12141
MOQ: 100



Deutsch 8AWG Pin
0462-203-08141
MOQ: 100



Deutsch 4AWG Pin
0462-203-04141
MOQ: 100



DTM Machined 16AWG
0462-005-20141
MOQ: 100



DT Machined 14-16AWG
0462-209-16141
MOQ: 100



DTP Crimp
1062-12-0166
MOQ: 1 Roll (2500)



Stamped DTP Crimp
1062-12-0222
MOQ: 1 Roll (2500)




DT Crimp
1062-14-0122
MOQ: 1 Roll (4000)

RECEPTACLE OPTIONS

Our **receptacle** offerings provide reliable power solutions for any marine setup. We offer **USB Chargers, 12V Power Ports, and Combination Units** designed for durability and convenience, keeping your devices powered on the go. Whether you need fast charging or versatile connectivity, we have the right solution for you.

Great For: Supplying weather resistant charging and power access for USB and 12 V devices, ensuring reliable connectivity in any marine environment.



Receptacles
MOQ specified
in product
details.



- CONTURA DUAL
USB CHARGER**
- **Current Rating:** 4.8A (32VDC)
 - No LED
 - IP66 Protection
 - **MOQ:** 50



- ROUND DUAL
USB**
- **Current Rating:** 4.8A (32VDC)
 - **LED color:** Blue
 - IP66 Protection
 - **MOQ:** 50



- DUAL USB W/ RED
VOLT METER**
- **Current Rating:** 4.2A (4VDC)
 - **Colors:** Red
 - IP66 Protection
 - 3.0A available in Aluminum
 - **MOQ:** 50



- CONTURA DUAL USB
CHARGER W/ RED
VOLT METER**
- **Current Rating:** 4.8A (32VDC)
 - **LED color:** Red
 - IP66 Protection
 - **MOQ:** 50



- ROUND DUAL USB
TIGHT CAP**
- **Current Rating:** 4.8A (32VDC)
 - No LED
 - IP66 Protection
 - **MOQ:** 50




- DUAL USB
UN-LIT**
- **Current Rating:** 4.8A (32VDC)
 - No LED
 - IP66 Protection
 - **MOQ:** 50



- USB/USB-C &
12V COMBO**
- **Current Rating:** 4.8A (32VDC)
 - No LED
 - IP66 Protection
 - **MOQ:** N/A



- ROUND DUAL
USB/USB-C**
- **Current Rating:** 4.8A (32VDC)
 - **USB-C:** 45W Fast Charger (4.0)
 - No LED
 - IP66 Protection
 - **MOQ:** 100

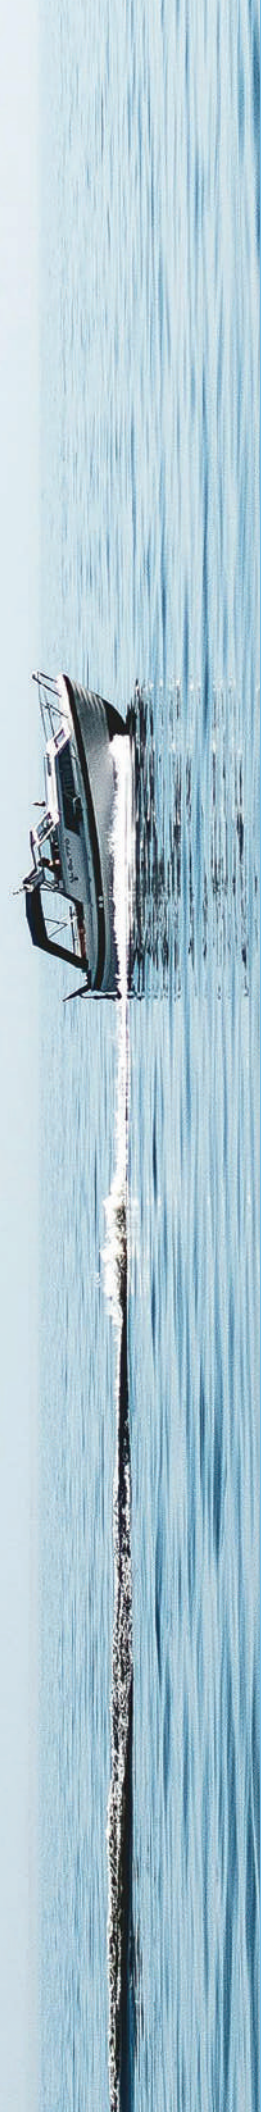

Mounts w/ Cables

Our USB and data ports keep you connected with **fast charging** and **seamless media integration** on the water. From **USB** and **HDMI** options to panel-mount data ports, our lineup ensures reliable power and connectivity.



Deutsch Connections

Our Deutsch-style receptacle connectors provide **secure, waterproof connections** for reliable power in marine and automotive environments. Designed for durability, they prevent corrosion and ensure a tight fit for **USB/USB-C chargers** and **12V ports**.



3000-2232

USB PANEL MOUNT W/ CABLE

- **Voltage Output:** 30V
- **Wire Size:** 24 AWG
- **Wire Length:** 3.2 Meter
- **MOQ:** N/A



3000-1035

USB/3.5MM WITH CABLE & BRACKET

- **Voltage Output:** 30V
- **Wire Size:** 24 AWG
- **Wire Length:** 3.5 Meter
- **MOQ:** N/A



3000-4400

USB/HDMI MOUNT W/ CABLE

- High Speed HDMI Cable
- 30V output USB cable
- **Wire Size:** 24 AWG
- **Wire Length:** 2 Meter
- **MOQ:** N/A



6000-3004

12V W/ SINGLE PLATE

- IP65 Protection
- **Wire Size:** 16 AWG
- **Max Amperage:** 15A
- **MOQ:** 100



6000-3205

USB/C & 12V COMBO WITH DOUBLE PLATE

- IP65 Protection
- **Wire Size:** 16 AWG
- **MOQ:** 50



6000-3005

USB/C WITH SINGLE PLATE

- IP65 Protection
- **Wire Size:** 16 AWG
- **Peak Voltage:** 36 V DC
- 2 Port with Intelligent Device Detection
- **MOQ:** 40



3000-4022

FUSED USB/C & 12V COMBO WITH DOUBLE PLATE

- IP65 Protection
- **Wire Size:** 16 AWG
- **MOQ:** 50



12 VOLT ACCESSORIES

B

PLATES & COVERS

12 Volt Accessories

Our 12V voltmeter and receptacle provide **essential power** and **monitoring** for marine and automotive systems. The voltmeter offers **real-time battery status**, while the 12V receptacle delivers **reliable power** for accessories.



Plates and Covers

Our plates and covers provide a **clean, secure finish** for your switches, receptacles, and accessories. Designed for durability, they offer **protection against dust, water, and accidental damage** while ensuring a sleek look.



BW-VM-10001

BLUE 12V DC VOLT METER

- **Input:** 12 V DC / 24V DC
- **Range:** 6 - 15 V DC
- **Colors:** Red/Blue/Green/Orange
- **MOQ:** 50



BW-VM-10001-1T

BLUE 12V DC VOLT METER THRUSTER

- **Input:** 12 V DC / 24V DC
- **Range:** 6 - 15 V DC
- **Colors:** Red/Blue/Green/Orange
- **MOQ:** 50



6001-0001

12V RECEPTACLE

- **Max Amperage:** 15A
- **Max Voltage:** 12V DC
- **MOQ:** 50



3000-6011

SINGLE DOUBLE D PLATE

- **Mounting Holes:** 0.17"
- **Distance Between Holes:** 1.9"W
- **MOQ:** 100



3000-6021

DUAL DOUBLE D PLATE



- **Mounting Holes:** 0.17"
- **Distance Between Holes:** 3.5"W x 1"H
- **MOQ:** 100



3000-1005 (Black)
3000-1006 (White)

DOUBLE D SPRING COVER

- Easy upgrade for any USB, 12V, or Double D device
- Durable 316 stainless steel spring
- Includes two rubber gaskets
- **MOQ:** N/A

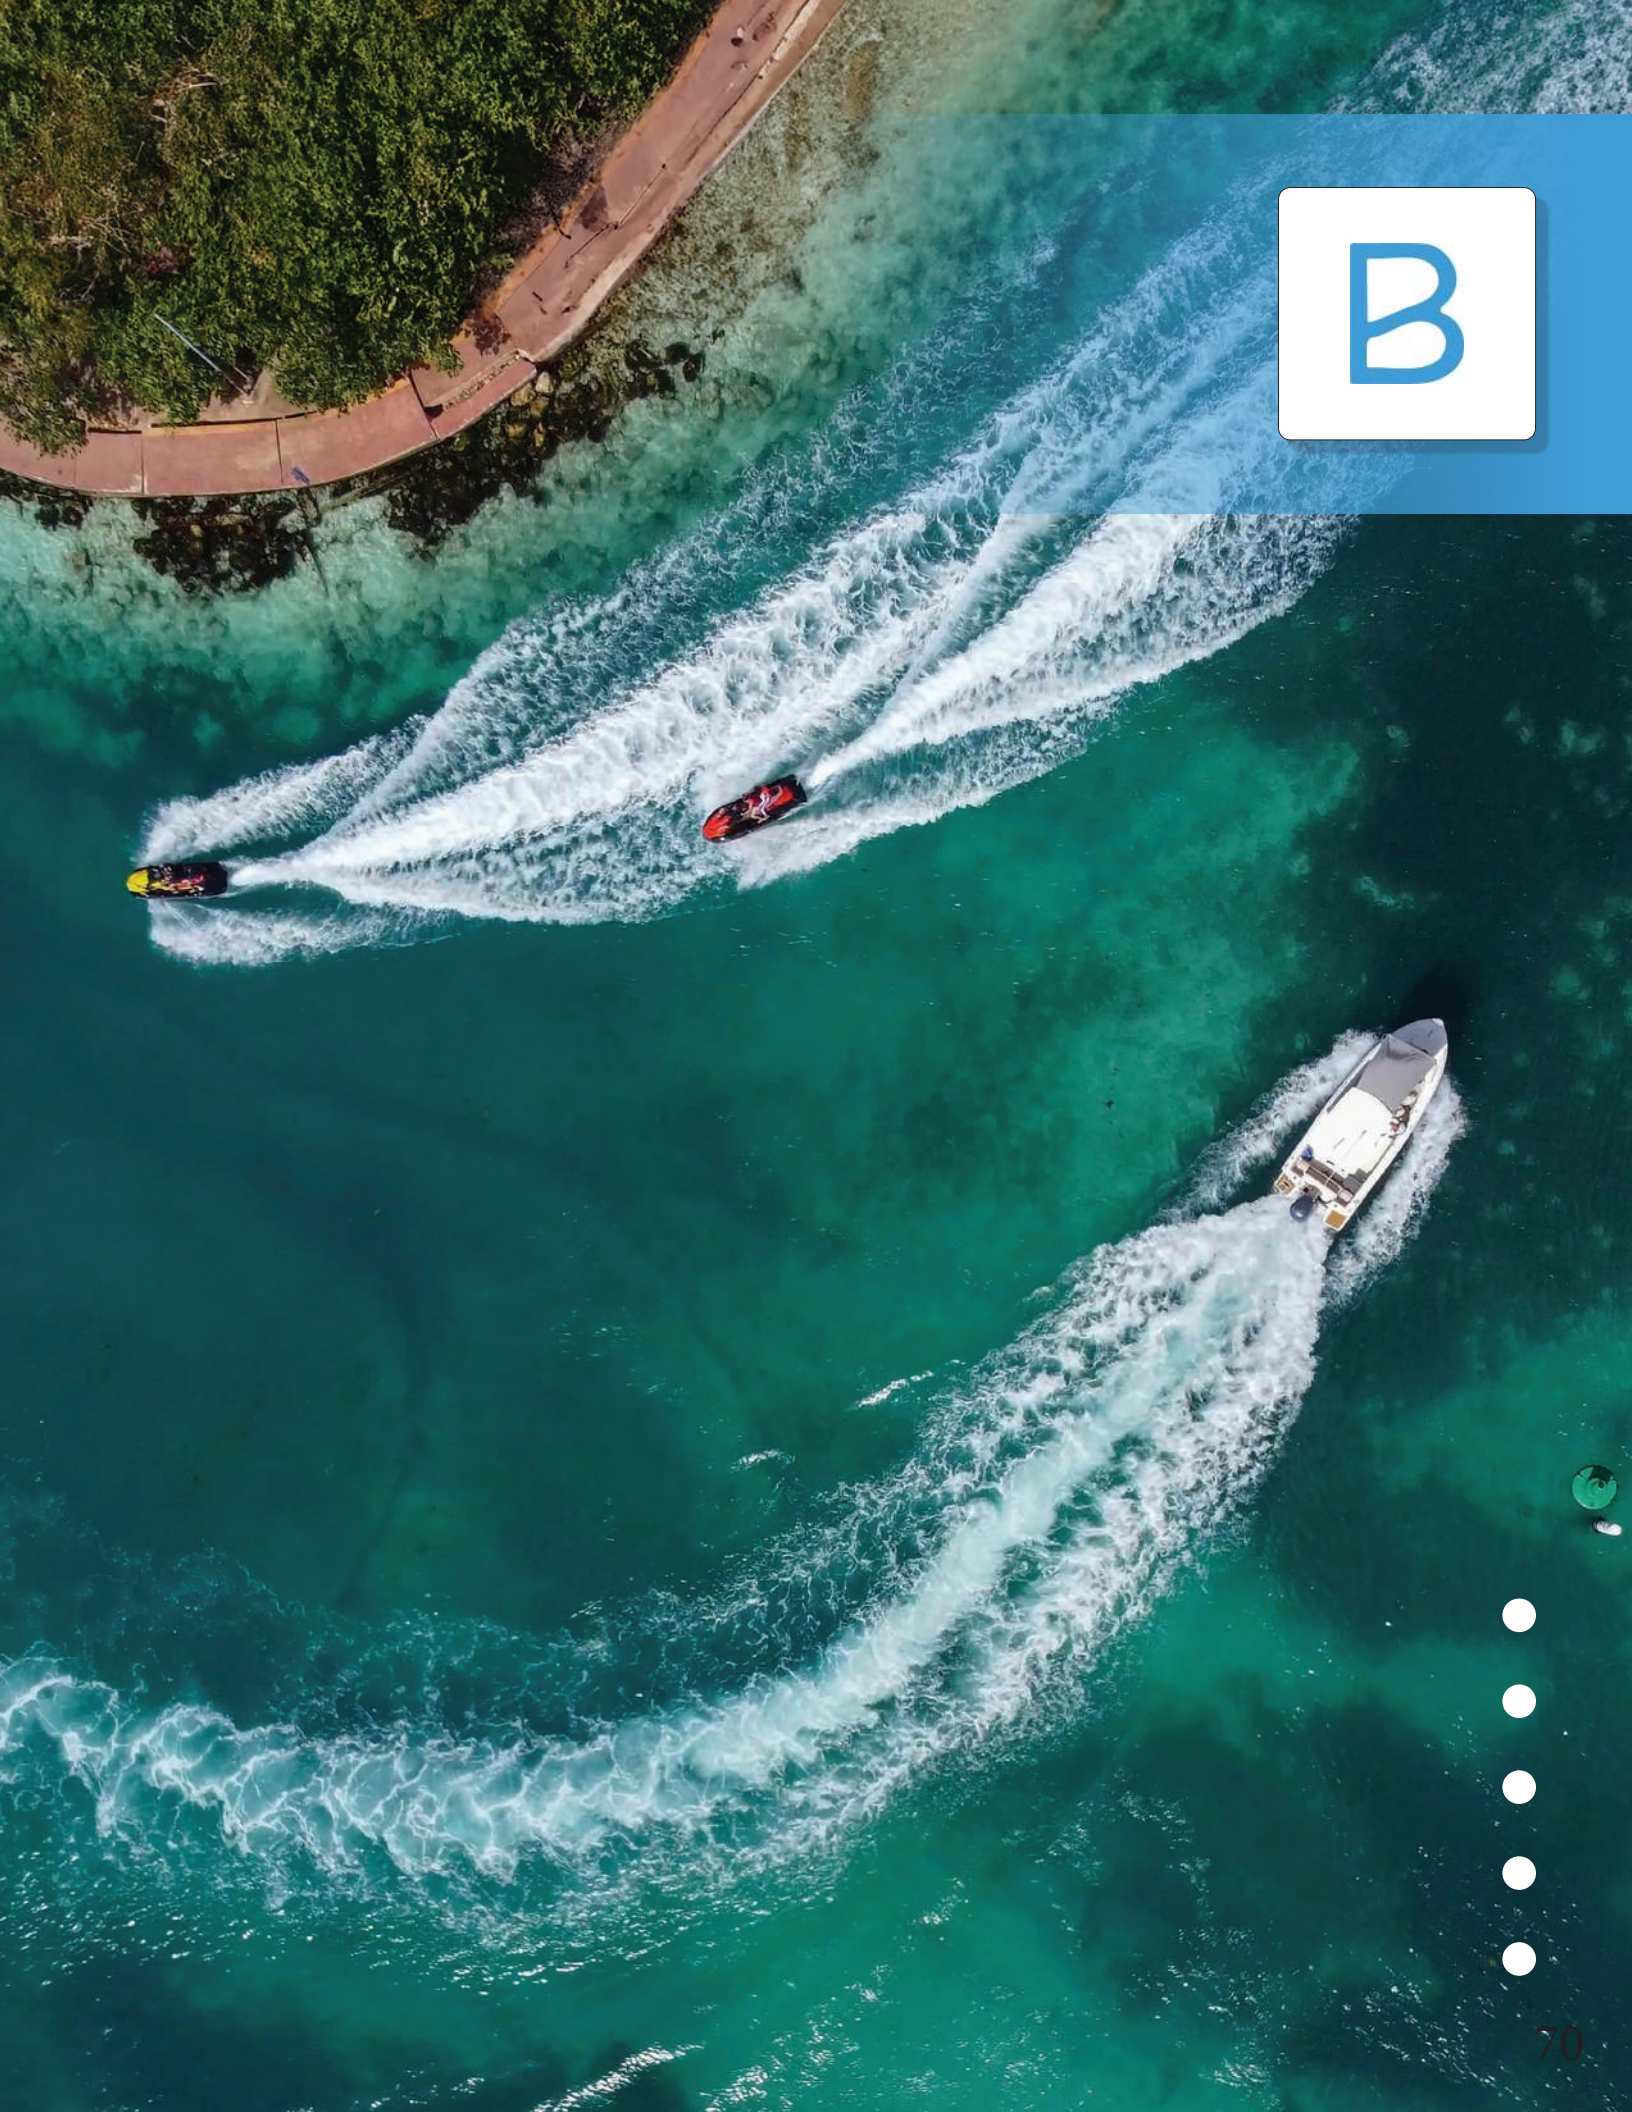

MARINE DATA & NETWORKING

Data you can trust. Connections that endure.

Reliable data is the backbone of every vessel. Our **NMEA 2000 cables** deliver fast, plug and play connectivity between instruments and networks. Designed for life at sea such as exposure to moisture, vibration, and corrosion, each cable **maintains signal integrity** when it matters most. Available in a range of lengths and terminations, these cables **simplify installation** and adapt to any system layout. Backed by rigorous testing and quality assurance, they help ensure your navigation and monitoring systems stay online. Whether linking chart plotters, sensors, or displays, this is where **seamless communication** begins.


Product Category	Page #
NMEA 2000	72-75



NMEA 2000 CABLES

Bluewater Enterprises offers **NMEA 2000 cables** in various lengths with **tee connectors** and **terminators**, all built to withstand harsh marine environments. Made from corrosion resistant materials with superior shielding, these cables ensure secure waterproof connections and **dependable data transmission**.

Great For: Reliable, plug-and-play connectivity for seamless marine electronics integration.



NMEA 2000 parts do not have an **MOQ**.



NMEA 2000
5 PIN DROP CABLE

Part #	2700-55-011	0.5 Meter
Part #	2700-01-011	1 Meter
Part #	2700-02-011	2 Meter
Part #	2700-03-011	3 Meter
Part #	2700-04-011	4 Meter
Part #	2700-05-011	5 Meter
Part #	2700-06-011	6 Meter
Part #	2700-10-011	10 Meter



NMEA 2000
FEMALE STRIP CABLE

Part #	2700-.05-010	0.5 Meter
--------	--------------	-----------



NMEA 2000
RIGHT ANGLE CABLE

Part #	2700-21-011	2 Meter
		Female/Angle
		Male/Straight



NMEA 2000
POWER NO FUSE

Part #	2703-11-001	No Fuse 1 Meter
Part #	2703-11-002	No Fuse 2 Meter



NMEA 2000 CONNECTORS

B

B



2702-12-012



2702-13-013



2702-14-014



2702-15-015

NMEA 2000 TEE CONNECTORS

Part #	2702-12-012	1 Way Tee Connector
Part #	2702-13-013	2 Way Tee Connector
Part #	2702-14-014	3 Way Tee Connector
Part #	2702-15-015	4 Way Tee Connector



NMEA 2000 POWER ISOLATOR

Part #	2706-00-000	Power Isolator Female to Male
--------	-------------	-------------------------------



2705-00-001



2705-00-010


NMEA 2000 TERMINATORS


Part #	2705-00-001	Male Terminator
Part #	2705-00-010	Female Terminator



NMEA 2000 RIGHT ANGLE ADAPTER

Part #	2704-12-011	Right Angle Adapter Female to Male
--------	-------------	------------------------------------

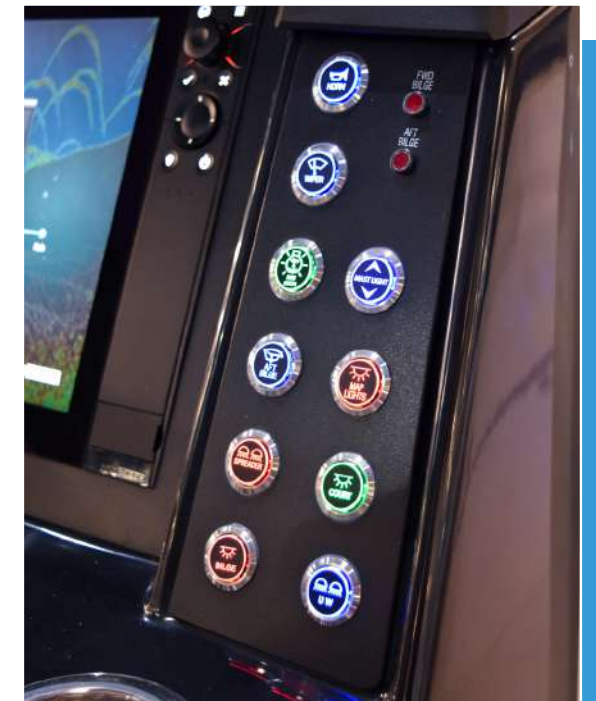



MOUNTING & PROTECTION

Built to shield. Made to last.

Every connection needs protection, and our Mounting and Protection products are designed to do just that. From **Rubber Boots** to **Sealing Grommets**, these components keep your electrical systems secure from moisture, vibration, and physical damage. Made from **high quality marine grade materials**, these products help extend the life of your installations and maintain dependable performance in the toughest conditions. Whether sealing switches, supporting cables, or protecting terminations, this is where **durability begins**.


Product Category	Page #
Rubber Parts	78-79



RUBBER PARTS

Bluewater Enterprises offers durable rubber components to protect and extend the life of your marine electronics. **Screw-on Caps, Grommets, and Boots** seal out moisture, dirt, and debris. Made from UV-resistant rubber, they maintain connection integrity and prevent corrosion. Whether covering open ports or shielding vulnerable areas, these accessories **deliver protection where it counts.**

Great For: Protecting ports, sealing cable entries, and shielding components from moisture in harsh environments.



Rubber Parts
MOQ specified
in product
details.

SCREW ON CAPS



1300400-0092
Black
MOQ: 100



1300402-0092
White
MOQ: 100



1300411-0092
Clear
MOQ: 100



1300600-0092
Black Toggle
MOQ: 100



13300402-0092
White Toggle
MOQ: 100



1300700-0092
Hex Seal Half Boot
MOQ: 100

BOOTS



1655-001-000
Battery Boot Red
MOQ: 100



Battery Boot Black
MOQ: 100

GROMMETS



1301526-0092
Utility Grommet 2.6"
MOQ: 100



1300801-0092
1/4 PVC Grommet
MOQ: 100



1301534-0092
Utility Grommet 3.4"
MOQ: 100



1300800-0092
1/8 PVC Grommet
MOQ: 100



BLUEWATER

ENTERPRISES

About Bluewater Enterprises

At Bluewater Enterprises, we're committed to delivering quality marine electronics at a price you can trust. Whether you're upgrading your vessel's systems or building from scratch, our range of switches, busbars, couplers, and cables are engineered to perform in the toughest marine environments.

Stay Connected

Explore our full product range, get installation tips, and stay current with new releases.

Website: www.bluewatergadgets.com

Email: sales@bluewatergadgets.com

Phone: (855)-BLUE700

Address: 13620 49th St N Clearwater, FL 33762

Follow Us for Updates and Promotions at

Facebook & LinkedIn: @bluewaterenterprises

Instagram: @bluewater_gadgets



Scan our QR code to view our full product range online, or visit www.bluewatergadgets.com