




SI-Auto Charging Relay / 9805-7799 / 12V

LED	BATTERY STATUS	REASON
Fast Flash ■■■■■	B No Connection Under 9.5V / Over 16V	B Fault
Fast Flash ■■■■■	A No Connection Under 9.5V / Over 16V	A Fault
Slow Flash ■■■■■	B 13V (2Min) -->Combine 13.6V(30Sec)-->Combine	B Charging
Slow Flash ■■■■■	A 13V (2Min) -->Combine 13.6V(30Sec)-->Combine	A Charging
Solid Yellow ■■■■■	A & B Under 12.75V (30Sec) Under 12.35V(10Sec)	Discharging
Slow Flash ■■■■■	A Isolated / Start Isolation	Start Isolation wire is energised to Bat +
Fast Flash ■■■■■	5 Sec --> Combine Override	Override wire is energised to GRD

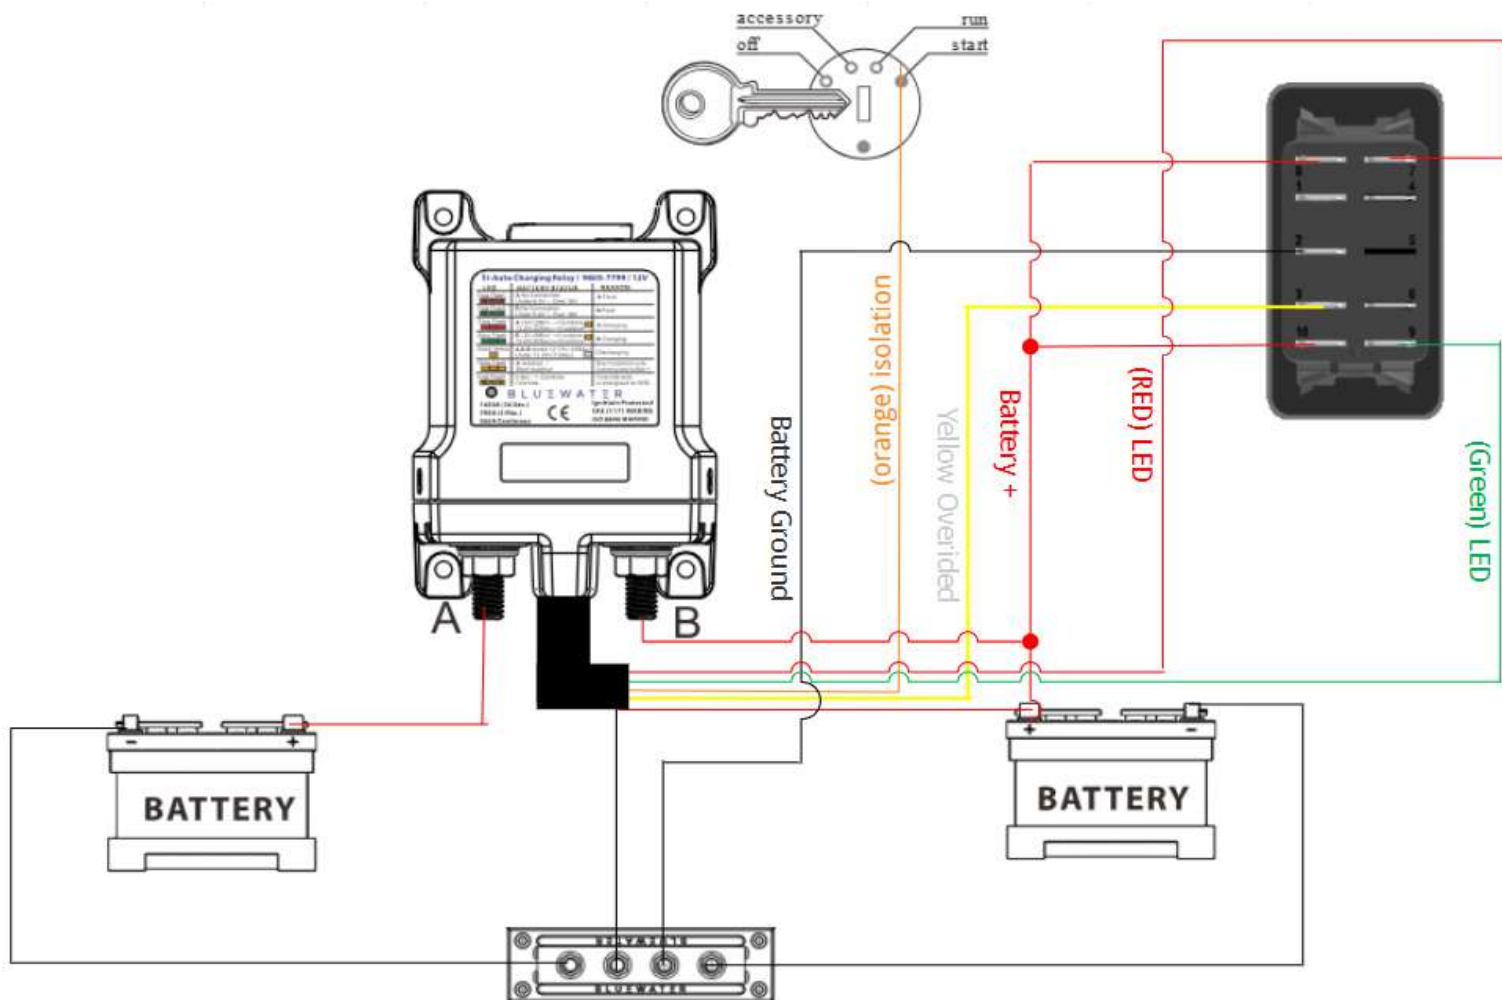

BLUEWATER

1450A (30 Sec.)
700A (5 Min.)
500A Continuous



Ignition Protected
SAE J1171 MARINE
ISO 8846 MARINE