

Two Circuit Plus Battery Switch

Two Circuit Plus 300A DC

Caution

- ▶ Disconnect positive battery terminal before installing.
- ▶ Consult marine electrical professional for proper wiring application.





Installation

- ▶ Refer to the latest edition of NFPA 302 and/or ABYC E11 Standard for installation information.
- ▶ Attach one 4/0 AWG cable per terminal to meet ratings.
- ▶ Battery cable terminals must be attached under nut and lock washer. Torque 120 in-lb (13.56 N·m).




Operation

- ▶ Turn all appliances off before turning the battery switch to OFF.
- ▶ Do not switch to OFF while engine is running.

Dimension

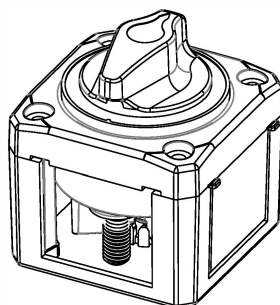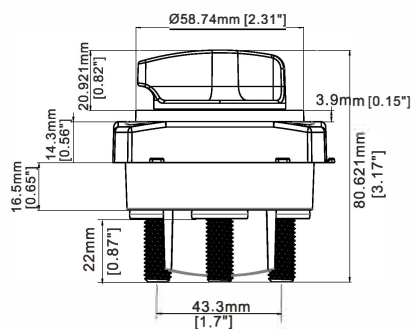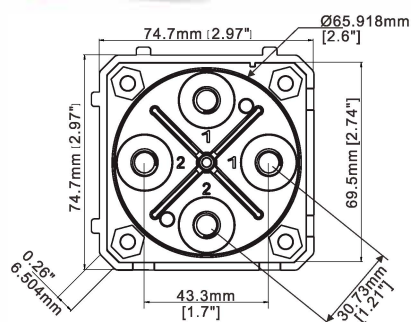

Mounting

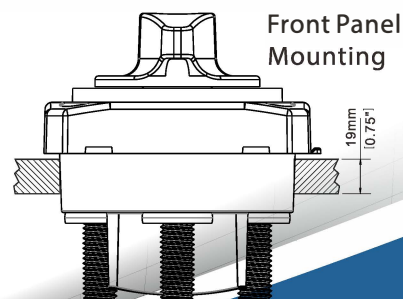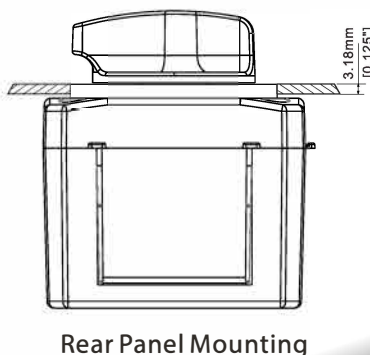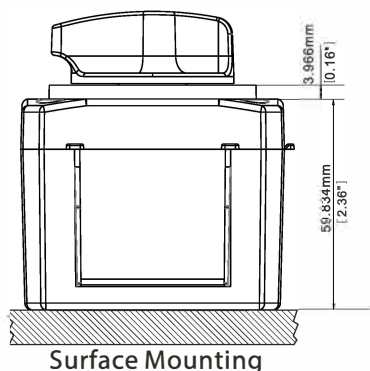


Parts # 9800-011-X

- ▶ Color: 9800-011-10 (Panel), 9800-011-11 (Surface)

Continuous Rating	300 Amps DC
Intermittent Rating	450 Amps DC 5 min.
Cranking Rating	675 Amps DC 30 sec.
Maximum Voltage	32 Volts DC
Switch Operating	-22°F to 284°F
Mounting	Surface / Front , Rear Panel
Cable Size	4/0 AWG (120 mm ²)
Standard	meet S.A.E. J1625,J1171,ABYC E-11 UL1500 (Ignition protection)
Stud size	2pcs 3/8"-16
Torque rating	120in-lb (13.56Nm) max.
Studs and Nuts	Copper with Tin plated

Wiring

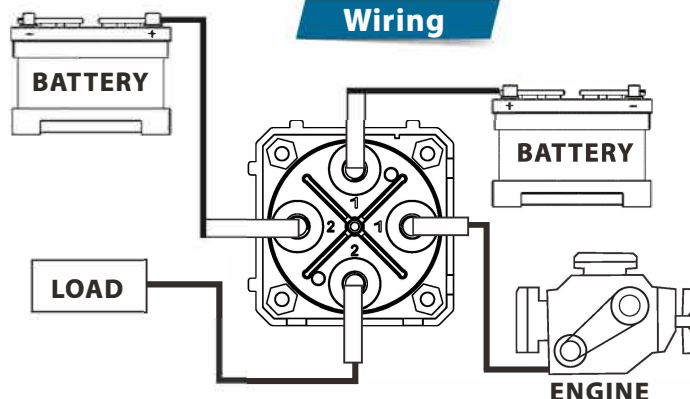

Mounting Holes

