BLUEWATER

Bringing Quality Electronics at Affordable Prices

CIRCUIT BREAKERS



B





77000-9600-xxx *xx indicates amp rating

HIGH AMP PANEL MOUNT

- 1/4" Stud Size Stainless Steel
- Mounting Holes 0.26"
- Distance Between Mounting Holes: 2.2"

Max Voltage: 32VDC/48VDC Available Amps: 30 - 150A

MOQ: 20



77000-9900-xxx *xx indicates amp rating

HIGH AMP **SURFACE MOUNT**

- 1/4" Stud Size Stainless Steel
- Mounting Holes 0.26"
- Distance Between Mounting Holes: 2.1" H / 1.3" W

Max Voltage: 32VDC/48VDC **Available Amps: 30 - 150A MOQ:** 20

HIGH AMP MOUNTS ORDERING GUIDE

Parts Available	77000-9600 Panel Mount 77000-9900 Surface Mount
AMPS Available *indicates only available with surface mount	30,35,40,50,60,70,80,90 100,110,120,*130, 150, *200, *250
Example Order	77000-9900-030
	(High Amp Surface Mount) - (30 Amp)

Great For: Reliable Circuit Protection, Simplifying Wiring, And Safely Handling 3A To 250A With Secure Connections.



Panel Mount

78000-9600-xx *xx indicates amp rating Options listed below



Surface Mount

78000-9900-xx *xx indicates amp rating Options listed below

MID-RANGE **BREAKER**

- Mounting Holes 0.09" Panel Mount
- Distance Between Mounting Holes: 1.4"
- Mounting Holes 0.23" Surface Mount
- **Distance Between Mounting Holes:**
- 1.4" H / 0.75" W

Max Voltage: 32VDC

Available Amps: 20, 30, 40, 50, 60A



38-xx-####-P00NB1 *x indicates amp rating

*# Indicates part option

38 SERIES **BREAKER**

- Mounting Holes 0.1" (J Hook)
- Distance Between Mounting Holes: 0.44"
- .250 Tab

Max Voltage: 32/50VDC **Current Rating:** 3 - 30A

MOQ: 200

38 SERIES ORDERING GUIDE

Part Options	Black Marked Thermal Breaker P3X16 White Marked Thermal Breaker P3Y16 Black Marked 90 degree screw P3XJ6
AMPS Available	3, 4,5, 6, 7, 8, 10, 12, 15, 20, 25, 30
Example Order	38- 03-P3XJ6 -P00NB1 (3 Amp) - (Black Marked 90 degree screw)

*Some Part Options Are Not Available With Certain Amperages



ATC FUSES

 \Box



8700 - xx - # *x indicates amp *# Indicates part option

SHORT STOP BREAKER W/COVER

- 5/16" Stud Size Stainless Steel
- Mounting Holes 0.20"
- Distance Between Mounting Holes: 1.88"
- Take 5/32" Pan head Machine Screw

Max Voltage: 14VDC/28VDC Available Amps: 3 - 50A

MOQ: 100




SHORT STOP BOOT

Protected Boot / Isolation Cover

MOQ: 25

SHORT STOP ORDERING GUIDE

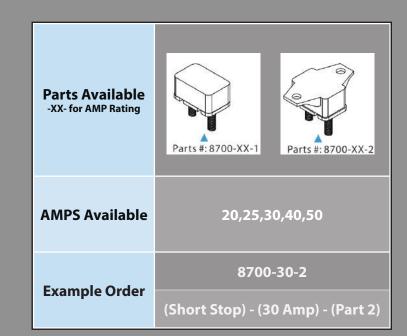

Great For: Reliable Marine Power Distribution, Reducing Wiring Clutter, And Handling 100a To 250a With Secure Connections.



77011-8000-003 **3 Amps**



77011-8000-005 **5 Amps**

MINI ATC RESETTABLE FUSE

- 0.354" H / 0.197"W
- Manual Push Reset
- Single Pole, Normal Closed
- Fuse is color coded to amp ratings

Max Voltage: 58VDC **Available Amps:** 3 - 30A

MOQ: 100



77001-8000-xxx

8710-00-00

ATC RESETTABLE FUSE

- 1.18" H / 0.78"W
- Manual Push Reset
- Single Pole, Normal Closed
- Fuse is color coded to amp ratings

Max Voltage: 12VDC **Available Amps:** 5 - 30A

MOQ: 100

ATC FUSE ORDERING GUIDE

Parts Available	77011-8000 77001-8000
AMPS Available *indicates only available with non-Mini ATC	3, 5, 6, 6.5, 7.5, 10, 15, 20, *25, 30
Example Order	77011-8000-030
	(Mini ATC Fuse) - (30 Amp)

B

BLOCKS 3 BREAKER



3200-2001-006 **6 Position**

3200-2001-012 **12 Position**

6 & 12 POSITION BREAKER BLOCK

- M5 main connecting studs
- Mounting Holes. 0.1695"
- Distance Between Mounting Holes: 6 Position: 3.74" H / 3.54" W 12 Position: 6.61" H / 3.54" W

Max Voltage: 48VDC Current Rating: 100A (6p) / 200A (12p)



3200-3001-012

12 POSITION ATC FUSE BLOCK WITH LED

- M5 main connecting studs
- Mounting Holes. 0.1695"
- Distance Between Mounting Holes:
 4.85" H / 2.76" W

Max Voltage: 48VDC Current Rating: 200A



3200-100-006 **6 Position**

3200-100-010 **10 Position**

6 & 10 POSITION FUSE BLOCK

- M5 main connecting studs
- Mounting Holes. 0.1695"
- Distance Between Mounting Holes:
 6 Position: 0.65" H / 1.125" W
 10 Position: 1.925" H / 1.125" W

Max Voltage: 48VDC Current Rating: 100A (6p) / 200A (10p)

Great For: Reliable Circuit Protection, Simplifying Wiring, And Safely Handling 100a To 250a With Breakers And Fuses.



3200-0001-006 **6 Position**

3200-0001-012 **12 Position**



3200-3003-006 **6 Position**

3200-3003-012 **12 Position**



3000-4001-00

6 & 12 POSITION FUSE BLOCK WITH LEDS

- M5 main connecting studs
- Mounting Holes. 0.1695"
- Distance Between Mounting Holes: 6 Position: 2.825" H / 2.725" W 12 Position: 4.725" H / 2.725" W

Max Voltage: 48VDC

Current Rating: 100A (**6p**) / 200A (**12p**)

6 & 12 POSITION FUSE BLOCK

- M5 main connecting studs
- Mounting Holes. 0.1750"
- Distance Between Mounting Holes: 6 Position: 3.709" H / 2.331" W 12 Position: 5.285" H / 2.325" W

Max Voltage: 48VDC

Current Rating: 100A (**6p**) / 200A (**12p**)

SAFETY HUB

- M8 main connecting studs
- Mounting Holes. 0.2360"
- Distance Between Mounting Holes: 3.995" H / 4.705" W

Max Voltage: 48VDC **Current Rating:** 100A



BLOCKS AND ACCESSORIES



6 POSITION ATC FUSE BLOCK

- M5 main connecting studs
- Mounting Holes. 0.1695"
- Distance Between Mounting Holes: 3.43" H / 1.25" W

Max Voltage: 48VDC Current Rating: 100A



12 POSITION ATC BREAKER BLOCK

- M5 main connecting studs
- Mounting Holes. 0.1695"
- Distance Between Mounting Holes: 6.875" H / 1.25" W

Max Voltage: 48VDC Current Rating: 200A



1200500-0092

IN LINE CIRCUIT BREAKER HOLDER

- Gasket-sealed for waterproof protection
- Clear cap for easy resets
- Mounting Tab

Great For: Reliable Circuit Protection, Simplifying Wiring, And Safely Handling 100A To 250A With Fuses And Accessories.





1200100-0092 **Kit**

1200101-0092 **Terminal Only**

IN LINE FUSE HOLDER

- Sealed IP67
- ATC Fuse Holder
- Mounting Tab



C-SERIES POWER SELECTOR



1500-909-000





1300600-0092

BLACK TOGGLE

MOQ: 100



1300400-0092 **Black**

1300411-0092 Clear

CIRCUIT BREAKER BOOT

MOQ: 100

B



ENTERPRISES

About Bluewater Enterprises

At Bluewater Enterprises, we're committed to delivering quality marine electronics at a price you can trust. Whether you're upgrading your vessel's systems or building from scratch, our range of switches, busbars, couplers, and cables are engineered to perform in the toughest marine environments.

Stay Connected

Explore our full product range, get installation tips, and stay current with new releases.

Website: www.bluewatergadgets.com **Email:** sales@bluewatergadgets.com

Phone: (855)-2583-732

Address: 13620 49th St N Clearwater, FL 33762

Follow Us for Updates and Promotions

Facebook & LinkedIn: @bluewaterenterprises

Instagram: @bluewater_gadgets



Scan to View our Full Product Range Online