# 19mm Ring LED Push Button Switch

## Features

- 10 Amp Electrical Rating at 12VDC
- ▶ IP67 Water proof Rating.
- LED brightness: soft, service life: 4000h.
- ► Appearance material: Keypad: PC/Stainless Steel.
- Electronic life: 10,000 cylces.
- ► Mechanical life: 500,000 cycles.
- Pin force: 50N, no loose or falls off phenomenon.

### Specification


Part Numbers	Latching	
9150-1000	19mm blue ring with blue led	
9150-1001	19mm red ring with red led	
9150-1100	19mm translucent ring with blue led	
Momentary		
9150-2000	19mm blue ring with blue led	
9150-2001	19mm red ring with red led	
9150-2100	19mm translucent ring with blue led	
Harness with wires		
9150-6006	5 wires harness with 6" long and 0.2" strip	
9150-6001	harness connector only	

III to a fee al	D I DI I ED
Illuminated	Red or Blue LED
Voltagel Rating	12VDC
Max. Current	10 Amp/12VDC
Mechanical Life	500,000 Cycles
Electrical Life Contact	10,000 Cycles
Resistance Insulation	50 mΩ Maximum
Resistance	1000mΩ Miminum
Dielectric Strength	2,000 VAC
Operate Storage Temp	-20°C ~ +55°C
Action Trip	3mm
IP Protection Class	Front panel protection to IP67
Plug Life Testing	10 Amp / 10,000 Cycles
Impact Resistance	IK 10 , Acceleration 20g
Salt Spray Resistance	Meet ASTMB117 & JIS-Z371 Std.
Contact Material	Silver Alloy
Actuation Force	3.5 N
Panel Thickness Panel Thickness	1-6mm
Mounting Nut Torque	5-14Nm
Body Material	Stainless Steel SS304

#### **Mounting**


(in inch)

Recommended mounting Hole size



### Diagram






Common Input

NO: Normal Open, Push On C+NO NC: Normal Close, Push Off C+NC


- : LED Negative input.

- : LED Negative input. + : LED Positive input.

### Drawing

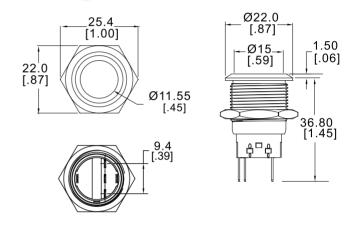

#### **Harness Wires**



#### **Harness Connector**

