


ELECTRONIC SWITCHES

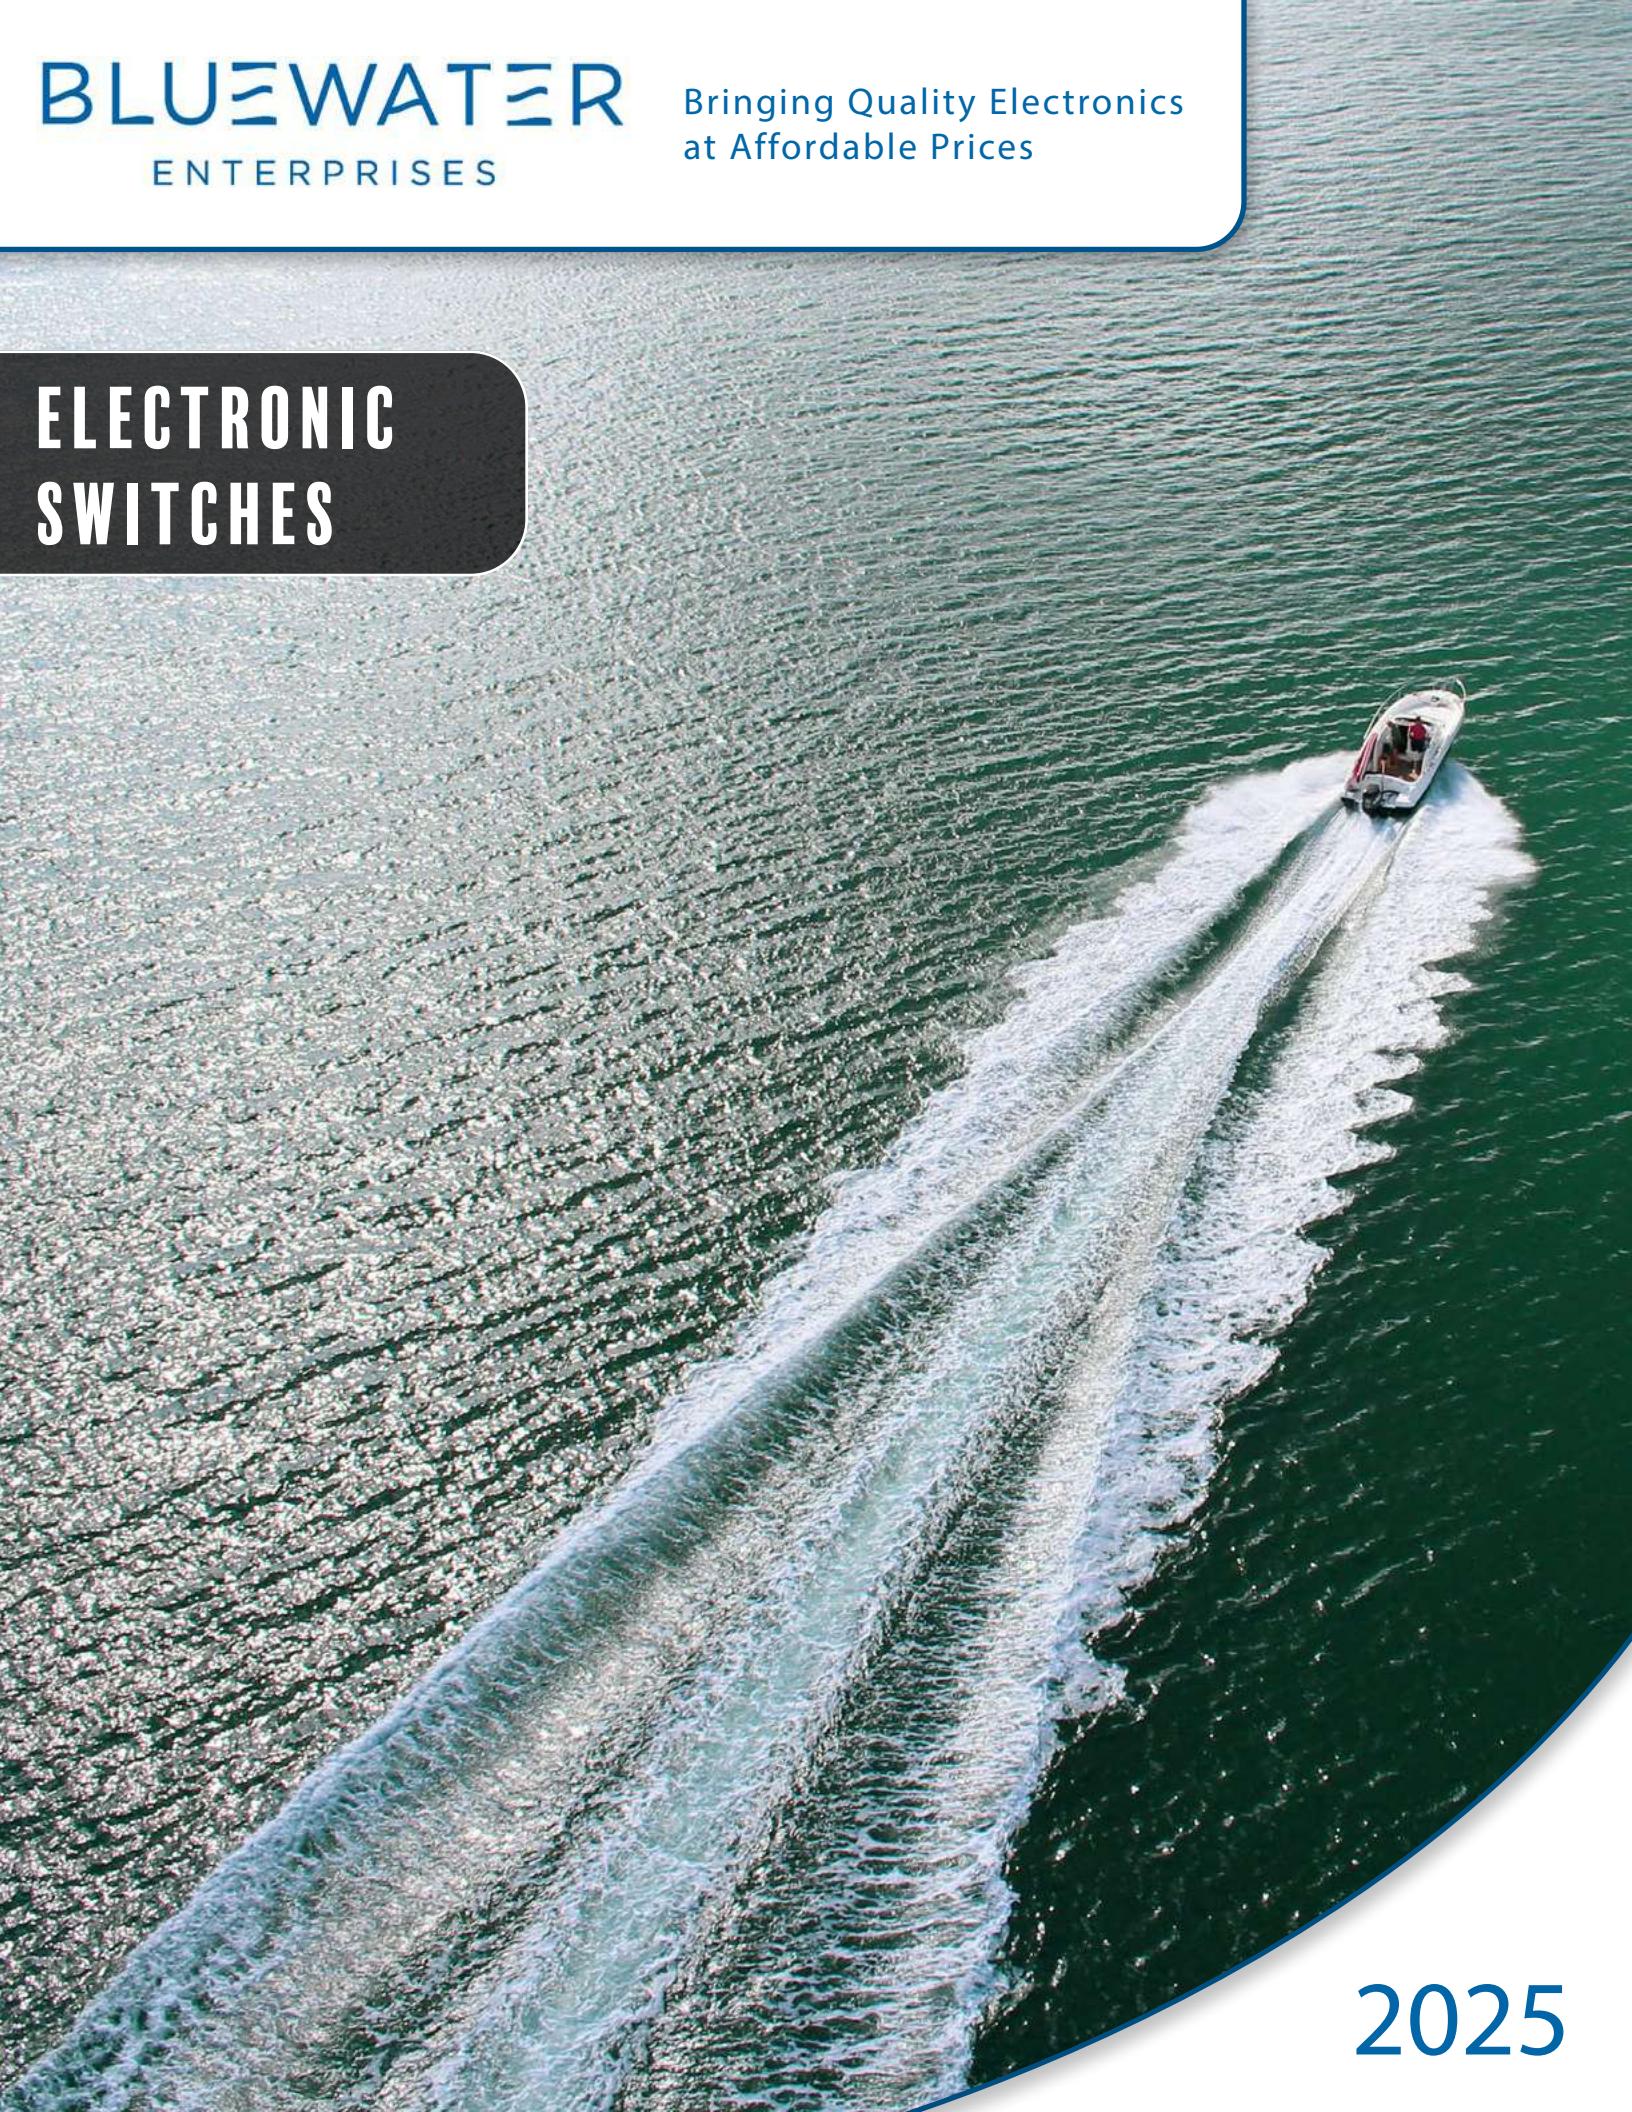

2025

Reliability You Need, Performance You Trust.

At **Bluewater Enterprises**, we specialize in high quality marine grade electrical solutions designed for reliability in the toughest conditions. Our 22mm Inrush Protection Switch is a testament to our commitment to durability, safety, and performance. With IP69K waterproofing, stainless steel SS316 construction, and inrush protection up to 120A, our switches ensure smooth uninterrupted operation for marine and industrial applications. Built to withstand shock, salt spray, and harsh environments, Bluewater products deliver the dependability you need when it matters most.

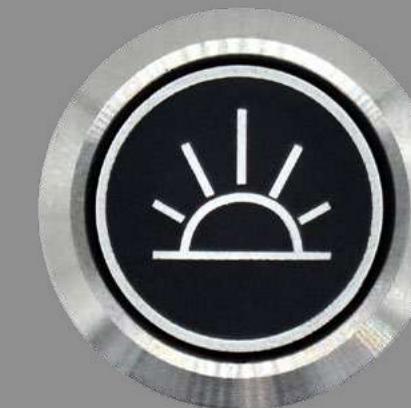


Table of Contents

1. Your Guide To Switches – Pg. 4

A Breakdown of Marine Switches, Their Functions, and How They Improve Your Boat's Electrical System.

2. Ordering Guide - Pg. 5

3. Troubleshooting – Pg. 6 - 7

Led Indicators, General Warnings and More Info for Your Switches.

4. Switch Models - Pg 8 - 31

9059 Series (22mm) - Pg. 8 - 21

2n1 Inrush Switch - Pg 8 - 13

22 mm Inrush Switch - Pg 14 - 21

9060 Series (22 mm) – Pg. 22 - 25


Programmable Inrush Switch

9057 Series (19mm) – Pg. 26 - 31


19mm Electronic Switch

5. Actuators – Pg. 32 - 33

6. Switch Harnesses - Pg. 34

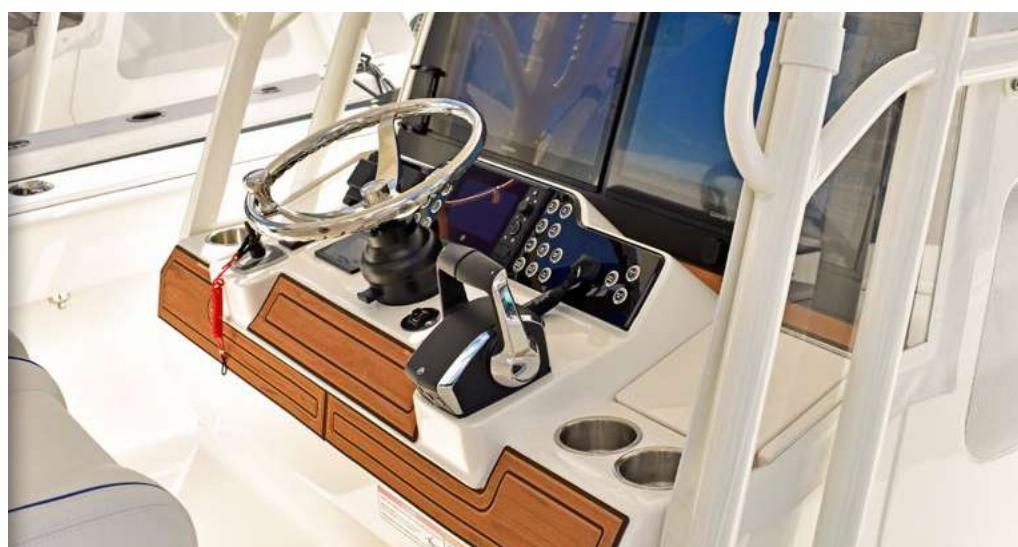

Your Guide to Switches

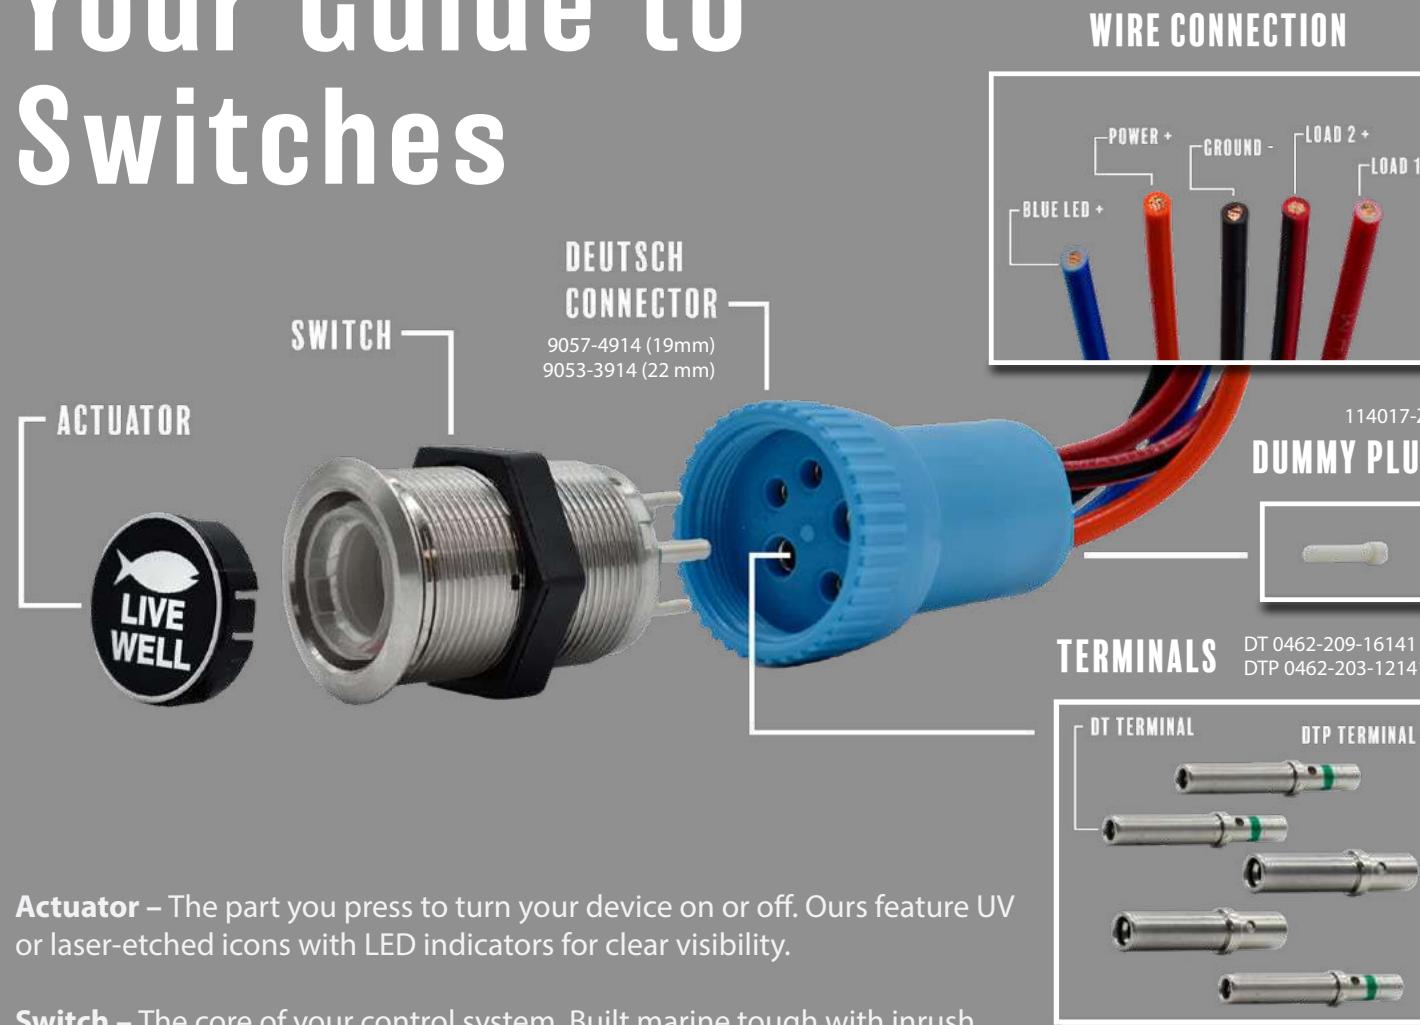

Your Guide to Ordering

Part	Description	Part #	MOQ
Actuators	Devices used to control switches by turning electrical signals into physical movement.	Refer to Actuators (Page 30)	25
Capacitor	Stores and releases electrical energy in a circuit to smooth voltage fluctuations.	1406-000-001	N/A
Choke	A coil that blocks high-frequency noise while allowing direct current (DC) or low-frequency signals to pass.	1400-000-001	N/A
Deutsch Connectors	Durable connectors used for secure and weather-resistant electrical connections, often in harsh environments.	9057-4914 (19mm) 9053-3914 (22 mm)	100
Diode	Electrical component that allows current to flow in only one direction, protecting circuits from reverse voltage.	1405-300-001 (NAV/ANC) 1405-300-001 (Trailer)	N/A
Dummy Plugs	Placeholders used to seal unused connector ports and protect them from dust and moisture.	114017-ZZ	N/A
Switches	Control devices that open or close electrical circuits, turning systems or functions on and off.	Refer to Switches 19mm (Pages 24-29) 22mm (Pages 6-23)	32 (19mm) 20 (22mm)
Terminals	Metal ends used to connect wires securely to electrical components or circuits.	DT 0462-209-16141 DTP 0462-203-12141	100

Parts For Troubleshooting

Choke



1400-000-001

How it Fixes: Reduces electrical noise and suppresses surges that can trigger over current or inrush faults.

Where to Install: Install in-line between the switch and device (e.g., pump or motor), as close to the pump as possible and above the waterline. **Necessary on all Washdown Pumps.**

How it works with Switch: Helps maintain smooth, noise-free operation by filtering out unwanted electrical transients.

Diode (20A/45V)



1405-300-100

How it Fixes: Prevents back feeding power to other devices, stopping unwanted electrical interference.

Where to Install: For bilge pump setups, install it in-line on the input side with the cathode (gray band) facing the switch. In all other cases, install on the output side with the cathode facing the device. **Necessary on all Bilge Pumps**

How it works with Switch: Ensures power flows in the correct direction, protecting sensitive devices when the battery is off.

Capacitor



1406-000-001

How it Fixes: Absorbs electrical transients and smooths out voltage fluctuations to prevent faults.

Where to Install: Place across the Line V+ and Ground near the switch.

How it works with Switch: Stabilizes the voltage, preventing damage from electrical spikes or noise.

Your Guide to Troubleshooting

LED INDICATORS

Blue – Back lighting only (if used).*

Green – Indicates ON with the first press in OFF-ON-ON variants.*

Red – ON with the first press in OFF-ON and the second press in OFF-ON-ON variants.*

Yellow – Auto mode in timer-based (NAV/ANC) variants.**

Purple – Over current fault.***

White – Inrush Protection. Flashing white LED activates at 120A, pausing output until reset.****

* (Applicable to 9057, 9059, and 9060) ** (Applicable to NAV/ANC only)

*** (Applicable to 9060 series only) **** (Applicable to 9059 and 9060)

If multiple switches in a panel flash or **change color randomly**, it likely indicates low voltage. Check battery charge and voltage loss in the primary B+ supply circuit.

- Dummy plugs required in Bluewater DT connectors for all non-wired (empty) pin locations. (Dummy Plug Part #: 114017-ZZ)
- Failure to include dummy plug in non-wired (empty) pin locations in Bluewater DT Connector voids water tight rating and warranty.
- Only use Bluewater DT connector, other connector may cause damage & will void warranty.
- For accessories exceeding 20 amps, set the breaker to 0 and use an external breaker for proper protection.

WARNINGS

2N1 Inrush Switch

Upgrade your marine setup with the **2N1 Inrush Switch** built to handle demanding electrical loads with seamless control. Featuring **dual pushbuttons** for two outputs or up down functions, this rugged switch boasts **IP69K waterproofing** stainless steel construction and 120A inrush protection for ultimate **reliability**. Designed to withstand salt spray extreme shocks and harsh marine conditions it delivers precision strength and safety because on the water **every connection counts**.

FEATURES

- Powerful Performance:** 2 x 10A per channel, 20A max.
- Dual Control:** Two pushbuttons for dual outputs or up/down control.
- Marine-Grade Toughness:** SS316 stainless steel body, IP69K waterproof.
- Built for the Elements:** Salt spray tested (EN ISO 9227-17).
- Shockproof:** Withstands 20g bump shocks.
- Fire-Resistant:** UL 94 V2 flammability rating, heat-rated to 105°C.



N/O: Normally Open N/C: Normally Close 2 Output Function	Parts No.	Page #	Power On			
1. N/O (ON) 2. N/O (ON)	9059-7002	10				
1. N/C (OFF) 2. N/C (OFF)	9059-7004	10				
1. N/C (ON) 2. N/O (OFF)	9059-7006	11				
1. N/O - On/Off 2. N/O - On/Off	9059-7009	11				
1. N/O - On/Off 2. N/C (OFF)	9059-7012	12				
1. N/O - On/Off 2. N/C (OFF)	9059-7013	12				
1. N/O - On/Off 2. N/O - On/Off NAV/ANC	9059-7014	13				
1. N/C - Dim Up 50% --> 100% 2. N/C - Dim Dn 50% --> 5% DIMMER PWM	9059-7015	13		 50% 70%	 Dim up Off	 70% 30%

Double Momentary ON (9059-7002)

Operation

Press and hold the top button to turn on output 2 (**LED turns Green**)
Press and hold the bottom button to turn on output 1 (**LED turns Red**)

Daytime Mode: LED off.
Nighttime Mode: Blue LED enhances switch visibility.
Power ON: Both outputs and LEDs off.

Hold Top Button: Output 2 ON, Green LED.
Release: Output 2 OFF, LED off.

Hold Bottom Button: Output 1 ON, Red LED.
Release: Output 1 OFF, LED off.

Hold Both Buttons: Output 1 & 2 ON, Green Top LED, Red Bottom LED.
Release: Output 1 & 2 OFF, LEDs off.

Double Momentary OFF (9059-7004)

Operation

Press and hold the top button to turn off output 2 (**LED turns Green**)
Press and hold the bottom button to turn off output 1 (**LED turns Red**)

Daytime Mode: LED off.
Nighttime Mode: Blue LED enhances switch visibility.
Power ON: Both outputs and LEDs off.

Hold Top Button: Output 2 ON, Green LED.
Release: Output 2 ON, LED off.

Hold Bottom Button: Output 1 OFF, Red LED.
Release: Output 1 ON, LED OFF.

Hold Both Buttons: Output 1 & 2 OFF, Green Top LED, Red Bottom LED.
Release: Output 1 & 2 ON, LEDs off.

Double Momentary N/C (9059-7006)

Operation

Press and hold the top button to turn off output 2 (**LED turns Green**)
Press and hold the bottom button to turn on output 1 (**LED turns Red**)

Daytime Mode: LED off.
Nighttime Mode: Blue LED enhances switch visibility.
Power ON: Output 2 ON, Output 1 OFF and LEDs off.

Hold Top Button: Output 2 OFF, Green LED.
Release: Output 2 ON, LED off.

Hold Bottom Button: Output 1 ON, Red LED.
Release: Output 1 OFF, LED off.

Hold Both Buttons: Output 2 OFF, Output 1 ON, Green Top LED, Red Bottom LED.
Release: Output 2 ON, Output 1 OFF, LEDs off.

Double Latch ON (9059-7009)

Operation

Press and hold the top button to turn on output 2 (**LED turns Green**)
Press and hold the bottom button to turn on output 1 (**LED turns Red**)

Daytime Mode: LED off.
Nighttime Mode: Blue LED enhances switch visibility.
Power ON: Both outputs and LEDs off.

Press Top Button: Output 2 ON, Green LED.
Release: Output 2 stays ON, Green LED stays on.

Press Bottom Button: Output 1 ON, Red LED.
Release: Output 1 stays ON, Red LED stays on.

Both Buttons Pressed: Both outputs ON, Green Top LED, Red Bottom LED stay on.

Latch On Momentary Off (9059-7012)

Operation

Press the top button to turn on output 2 (**LED turns Green**)

Press and hold the bottom button to turn off output 1 (**LED turns Red**)


Daytime Mode: LED off.
Nighttime Mode: Blue LED enhances switch visibility.
Power ON: Output 2 OFF, Output 1 ON, Both LEDs OFF.

Press Top Button: Output 2 ON, Green LED.
Release: Output 2 stays ON, Green LED stays on.

Daytime Mode: LED off.
Nighttime Mode: Blue LED enhances switch visibility.
Power ON: Power ON: Output 2 ON, Both LEDs OFF.

Press Top Button: Output 2 ON, Both LEDs Green.
Release: Output 2 & 1 stay ON, Both LEDs stay Green.

Hold Bottom Button: Output 1 OFF, Red LED.
Release: Output 1 ON, LED off.
Press Top Button again: Output 2 OFF, LED off.
Release: Output 2 stays OFF, LED stays off.
Hold Both Buttons: Output 2 OFF, Red Bottom LED.
Release: Output 2 ON, Bottom LED off.

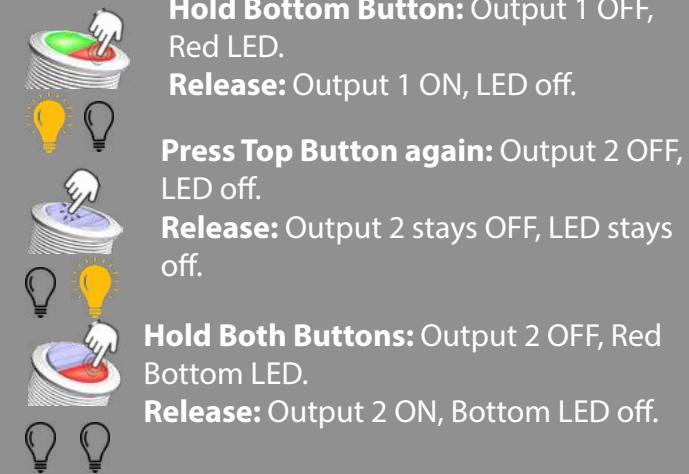

Latch On-Off NAV/ANC (9059-7014)


Operation

Press the top button to turn on both outputs (**Top LED turns Green, Bottom LED turns Red**)

Press the bottom button to turn off output 2 and turn on output 1 (**Top LED turns off, Bottom LED turns Red**)

Daytime Mode: LED off.
Nighttime Mode: Blue LED enhances switch visibility.
Power ON: Both outputs and LEDs off.

Press Top Button: Both outputs ON, Green Top LED, Red Bottom LED.
Release: Both outputs stay ON, Green Top LED, Red Bottom LED stay on.

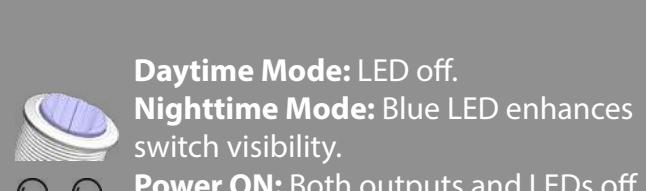

Press Top Button: Both outputs OFF, Bottom LED OFF.
Release: Both outputs stay OFF, Both LEDs stay OFF.
Press Bottom Button: Output 2 OFF, Output 1 ON, Red Bottom LED.
Release: Output 1 stays ON, Red Bottom LED stays on.
Press Bottom Button: Both outputs OFF, Bottom LED OFF.
Release: Both outputs stay OFF, Both LEDs stay OFF.

Latch ON/Interrupt OFF (9059-7013)

Operation

Press the top button to turn on output 2 (**Both LEDs turns Green**)

Press and hold the bottom button to turn off both outputs (**Top LED turns Off, Bottom LED turns Red**)

Daytime Mode: LED off.
Nighttime Mode: Blue LED enhances switch visibility.
Power ON: Power ON: Output 2 ON, Both LEDs OFF.

Press Top Button: Output 2 ON, Both LEDs Green.
Release: Output 2 & 1 stay ON, Both LEDs stay Green.

Press Top Button: Output 2 OFF, Both LEDs OFF.
Release: Output 2 stays OFF, Both LEDs stay OFF.
Press Top Button: Output 2 ON, Both LEDs Green.
Release: Output 2 & 1 stay ON, Both LEDs stay Green.
Hold Bottom Button: Output 1 & 2 OFF, Red Bottom LED, Top LED OFF.
Release: Output 1 ON, Output 2 OFF, Both LEDs OFF.



Dimmer (PWM) (9059-7015)

Operation


Press and hold the top button to dim up the light level from 5% to 100%

Press and hold the bottom button to dim down the light level from 100% to 5%


Restart Power: Light intensity level to the level of power off

Power ON: Both LEDs Red, Output at 50% light level.

Hold Top Button: Dim up the output light level, Bottom LED OFF.
Release: Light level set to 70%, Top LED Red.



Press Both Buttons: Turn off both outputs, Both LEDs OFF.
Activate: Press either Bottom or Top Button to activate the dimmer. Light intensity will adjust to 70% of the power-off level.
Hold Bottom Button: Dim down the output light level, Top LED OFF.
Release: Light level set to 30%, Bottom LED Red.

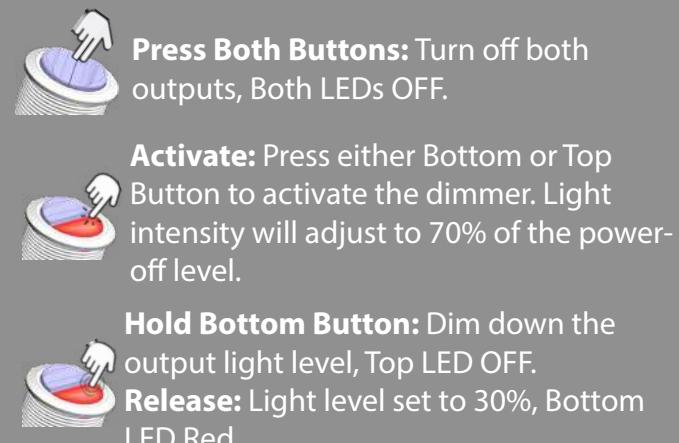


22mm Inrush Switch

Upgrade your boat's electrical system with the **22mm Inrush Protection Switch**. Built tough for marine conditions and engineered for seamless operation. Featuring **ultra-bright LED indicators**, a **waterproof stainless steel body**, and **high-load surge protection up to 120A**, this switch keeps your systems running safely and efficiently. Whether you need reliability for critical functions or a sleek, professional look, Bluewater's switch delivers both. Easy to install, impact-resistant, and designed to last, because when you're on the water, **only the best will do**.



FEATURES

- Power Capacity:** 20A max (1 channel) | 10A max per channel (2 channels)
- Night Visibility:** Blue LED back light for clarity; turns red when active
- Built to Last:** SS316 stainless steel body, IP69K waterproof rating
- Extreme Durability:** Salt spray (EN ISO 9227-17) & 20g shock tested
- Heat & Safety:** UL 94 V2 flammability-rated, withstands up to 105°C
- Smart Indicator:** LED turns red automatically when pump is running

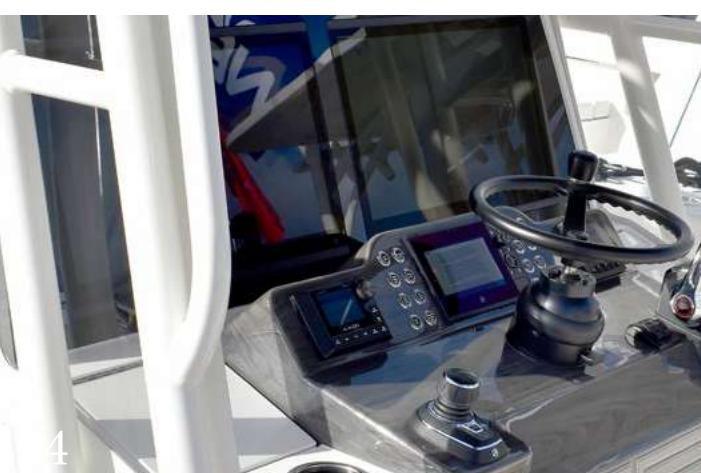


Function	Parts No.	Page #	Off	1st On	2nd On	3rd On	Rear Mark Page
Off-On	9059-1113	16	(Blue)	Red	X	X	Red Dot
Off- (On)	9059-2113	16	(Blue)	Red	X	X	Green Dot
NAV/ANC	9059-3114	16	(Blue)	Green	Red	X	White Dot
Off-On-On	9059-3113	17	(Blue)	Green	Red	X	Blue Dot
Off-On-On-Both	9059-3115	17	(Blue)	Green	Red	Yellow	Yellow Dot
Off-(On)-(On)	9059-2123	17	(Blue)	Green	Red	X	Green Dot
Off-(On)	9059-2213	18	(Red)	Red	X	X	Green Dot
Auto NAV Photo Sensor	9059-3734	18	(Blue)	Green	Red	Yellow	White Dot
Timer ON (1 min G) OFF (2min Y)	9059-1555	19	(Blue)	Red	Green	Yellow	Red Dot
Timer ON (2 min RED) --> OFF	9059-1555F	19	(Blue)	Red	X	X	Red Dot
Dimmer	9059-3116	19	(Blue)	Red	X	X	Green Dot
3-way Switch	9059-5113	20	(Blue)	Red	X	X	Red Dot
Off-(On) Ground	9059-2713	20	(Blue)	Red	Purple		Purple Dot
Off-On Ground	9059-1713	21	(Blue)	Red	Purple		Purple Dot
Off-(On) Signal	9059-2118	21	(Blue)	Red	Purple		Green Dot
On-(Off)	9059-2913	21	Red	(Blue)	X	X	Green Dot

Off-On (9059-1113)

Operation

Press turns on the device (**LED turns Red**)
Press turns off the device (**LED turns Blue**)

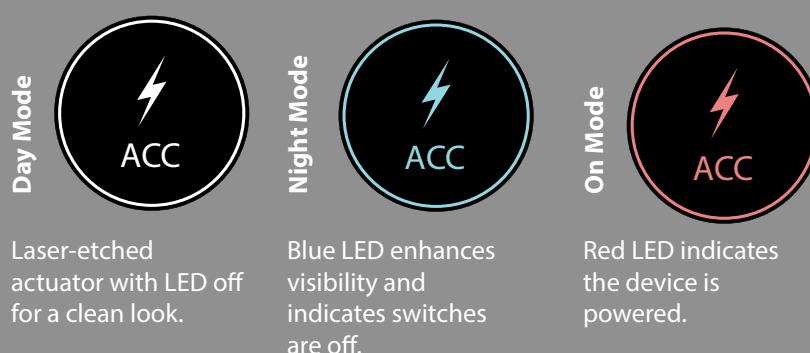

Off-(On) (9059-2113)

Operation


Press and hold the button to turn on the device (**LED turns Red**)
Release the button to turn off the device (**LED turns Blue**)



NAV/ANC Switch (9059-3114)

Operation


Press turns on the Navigation & Anchor lights (**LED turns Green**)
Press leaves Anchor light on and turns off Navigation light (**LED turns Red**)
Press turns off Anchor light (**LED turns Blue**)

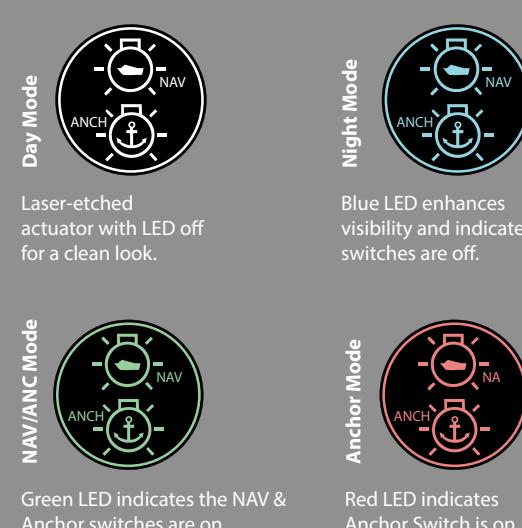

Off-On-On Switch (9059-3113)

Operation


Press turns on Load 1 (**LED turns Green**)
Press turns on Load 2 (**LED turns Red**)
Press turns off Load 2 & 1 (**LED turns Blue**)

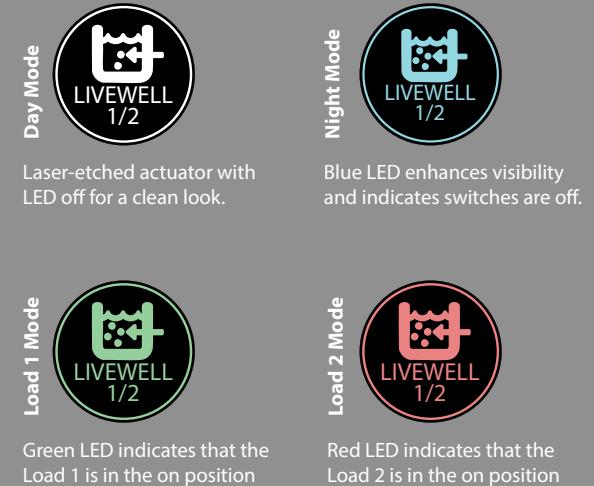

Off-1-2-Both (9059-3115)

Operation

Press turns on Load 1 (**LED turns Green**)
Press turns on Load 2 (**LED turns Red**)
Press turns on both Load 1 & Load 2 (**LED turns Yellow**)
Press turns off Load 2 & 1 (**LED turns Blue**)

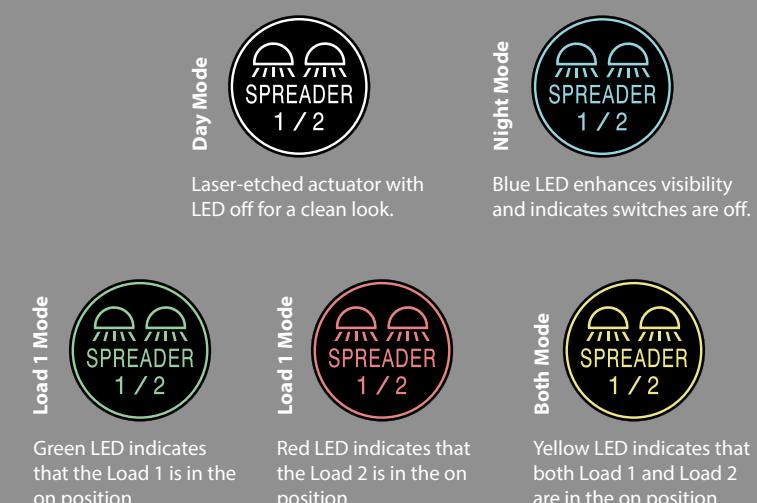

Dual Momentary (9059-2123)

Operation

Press and hold the button turns on Load 1 (**LED turns Green**)
Press and hold the button turns on Load 2 (**LED turns Red**)
Release the button to turns off Load 1 & 2 (**LED turns Blue**)



HORN Switch (9059-2213)

Operation

Press and hold the button to turn on the device (**LED turns Red**)

Release the button to turns off the device (**LED turns Off**)



Auto NAV Switch (9059-3734)

Operation

Daytime: Blue LED on, no output.


Nighttime (Auto Mode): Yellow LED on, NAV and ANC lights turn on automatically. If the key switch is off, the LED flashes yellow for 10 seconds before turning blue and shutting off NAV/ANC.

Manual Override:

1st Press: Green LED, NAV and ANC stay on.

2nd Press: Red LED, ANC on, NAV off.

3rd Press: Returns to Auto Mode—Blue LED (no output) or Yellow LED (NAV/ANC on) based on sensor input.

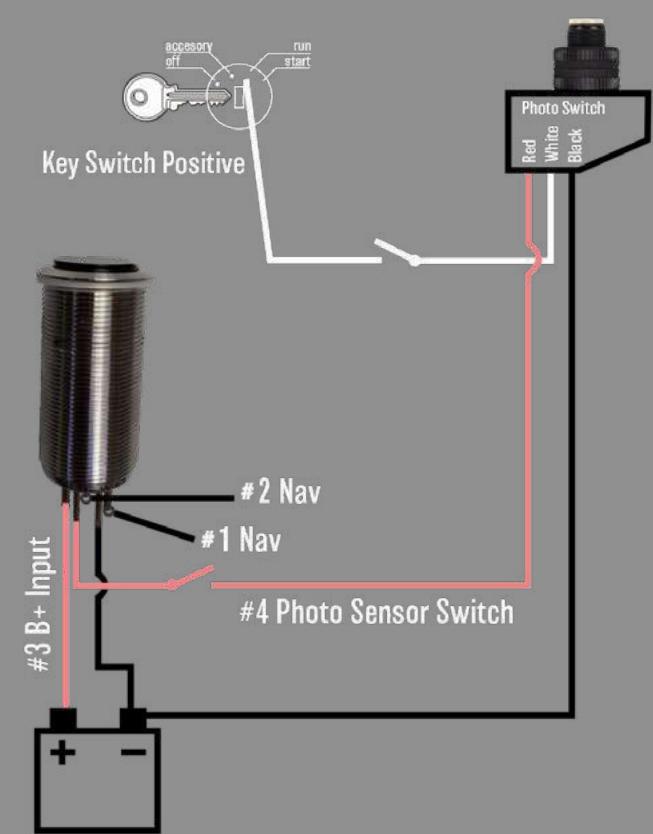

Timer Switch (9059-1555)

Operation

Press turns on the device (**LED turns Red**)

Press activate the timer function. Cycle on-off below

Turns on the device for 1 min then cycle off


(**LED turns Green**)

Turns off the device for 2 min then cycle on

(**LED turns Yellow**)

Press the button to disable the timer function

(**LED turns Blue**)

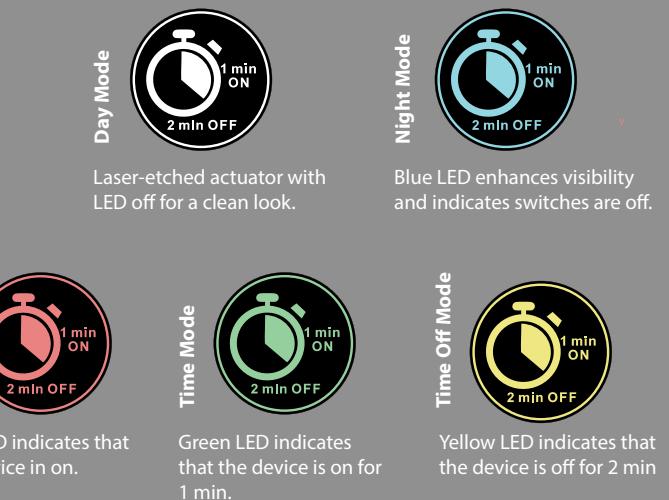


Timer Switch (9059-1555F)

Operation

Press to turn on (**LED to Red**), auto off after 2 min.

Press again during the timer to turn off immediately.

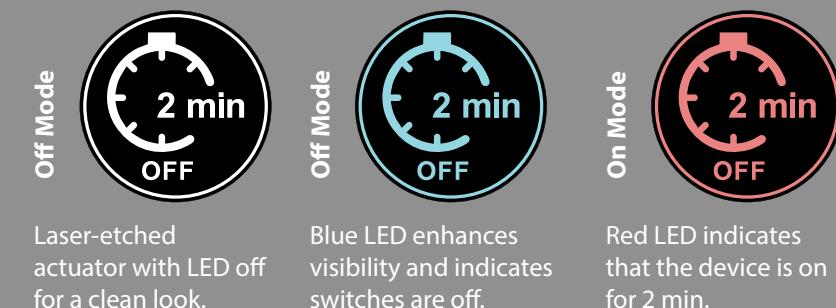

Dimmer Switch (9059-3116)

Operation


Press and hold to increase brightness.

(**LED turns Red**)

Press and hold again to dim the lights.

(**LED turns Red**)

Press once to turn the lights off.

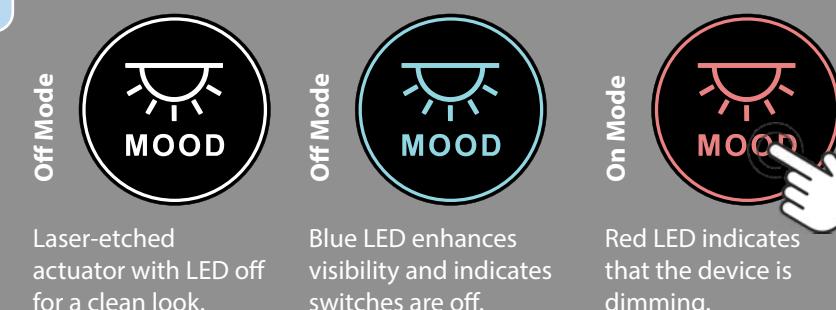


3-Way Inrush Switch (9059-5113)

Features

- Turning one switch on or off syncs all others on the network.
- Supports up to 6 switches.

3 Way Switch System Diagram

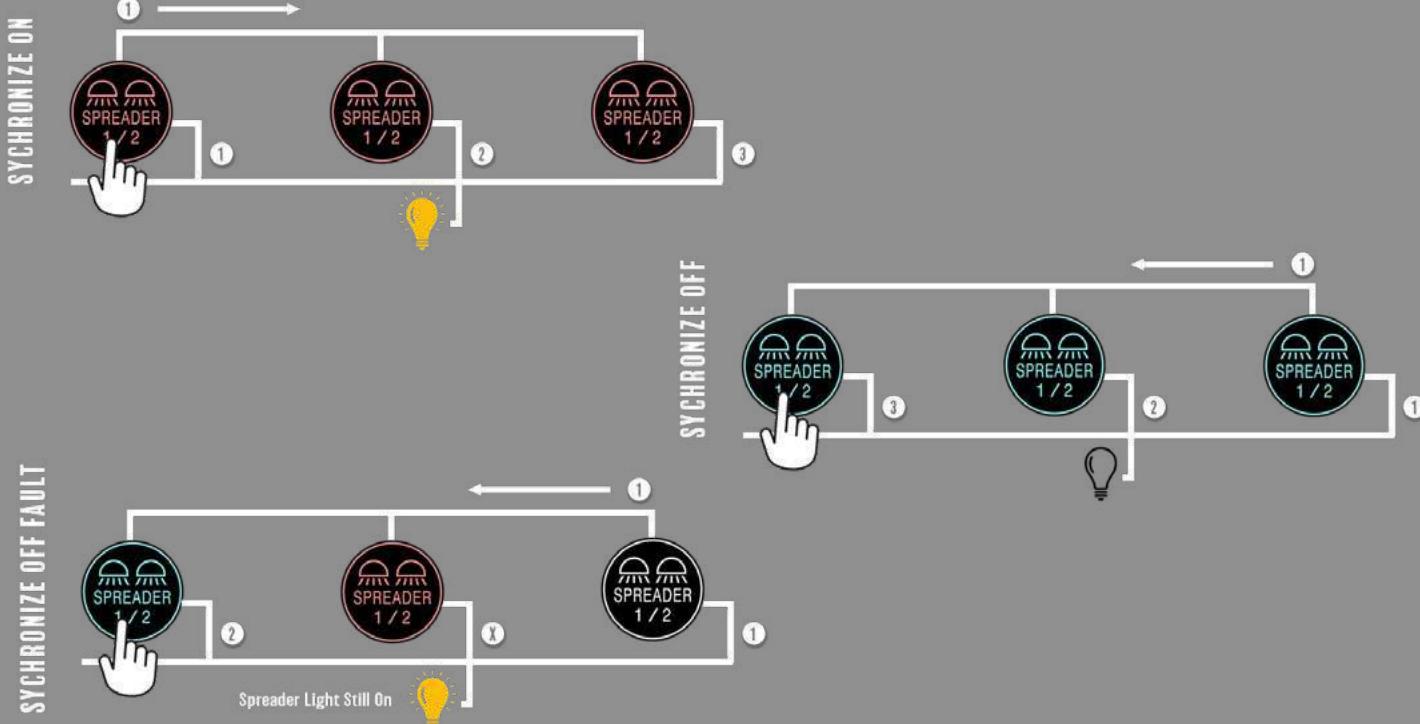

Ground Switch (9059-2713)

Operation

Press and hold to turn on. Release to turn off.
Pin #4 (Blue LED+) at 12-24VDC (LED Blue)
Pin #2 (Red LED+) at 12-24VDC (LED Red)
Both Pins #2 & #4 at 12-24VDC (LED turns Purple)



Blue LED indicates Pin #4 is powered on.



Purple LED indicates both pins are powered on.

Ground Switch (9059-1713)

Operation

Press once to turn on (LED unchanged)
Press again to turn off (LED unchanged)
Pin #4 (Blue LED+) at 12-24VDC (LED turns Blue)
Pin #2 (Red LED+) at 12-24VDC (LED turns Red)
Both Pins #2 & #4 at 12-24VDC (LED turns Purple)



Blue LED indicates Pin #4 is powered on.



Purple LED indicates both pins are powered on.



Blue LED indicates Pin #4 is powered on.



Purple LED indicates both pins are powered on.



Blue LED indicates Pin #4 is powered on.



Purple LED indicates both pins are powered on.

Signal Switch (9059-2118)

Operation

Press and hold to close Contact A (Pin 1) & Contact B (Pin 3) (LED unchanged)
Release to open Contact A & B (LED unchanged)
Pin #4 (Blue LED+) at 3-24VDC (LED turns Blue)
Pin #2 (Red LED+) at 3-24VDC (LED turns Red)
Both Pins #2 & #4 at 3-24VDC (LED turns Purple)



Blue LED indicates Pin #4 is powered on.



Purple LED indicates both pins are powered on.



Blue LED indicates Pin #4 is powered on.



Purple LED indicates both pins are powered on.

HORN Switch (9059-2213)

Operation

Press and hold the button to turn on the device (LED turns Red)
Release the button to turns off the device (LED turns Off)



Red LED indicates the device is on



Blue LED indicates switches are off



LED light is off (Momentary push)

22mm Programmable Switch

Upgrade your marine electrical system with the 22mm Programmable Switch, offering 8 adjustable amp settings and easy press-and-hold setup. Built with SS316 stainless steel, IP69K waterproofing, and inrush protection up to 120A, it's made for harsh marine conditions. A Red LED indicator provides instant feedback when the pump is running.



FEATURES

- **Flexible Power Options** – 20A max (1 channel) or 10A per channel (2 channels).
- **Customizable Protection** – 8 programmable amp settings including 3, 5, 6, 7.5, 10, 15, 20, and 0.
- **Easy Setup** – Adjust breaker current with a simple press-and-hold.
- **Inrush Protection** – Handles 120A surges for 120µs before fault mode.
- **Marine-Grade Durability** – SS316 stainless steel, IP69K waterproof, salt spray & shock tested.
- **Smart LED Feedback** – Red LED activates when the pump is running.

Function	Parts No.	Page #	Off	1st On	2nd On	3rd On	Rear Mark Page
Off- On	9060 - 1113	24	(Blue)	Red	X	X	Red Dot
Off - (On)	9060 - 2113	24	(Blue)	Red	X	X	Green Dot
NAV/ANC	9060 - 3114	24	(Blue)	Green	Red	X	White Dot
Off - On - On	9060 - 3113	25	(Blue)	Green	Red	X	Blue Dot
Off - On - On - Both	9060 - 3115	25	(Blue)	Green	Red	Yellow	Yellow Dot
Off - (On) - (On)	9060 - 2123	25	(Blue)	Green	Red	X	Green Dot



Off-On (9060-1113)

Operation

Press turns on the device (**LED turns Red**)
Press turns off the device (**LED turns Blue**)



Laser-etched actuator with LED off for a clean look.



Blue LED enhances visibility and indicates switches are off.



Purple LED indicates that a switch was tripped.



Red LED indicates that the Anchor switch is on.

Off-(On) (9060-2113)

Operation

Press and hold turns on the device (**LED turns Blue**)
Release the button turns off the device (**LED turns Green**)



Laser-etched actuator with LED off for a clean look.



Blue LED enhances visibility and indicates switches are off.



Purple LED indicates that a switch was tripped.



Red LED indicates that the Anchor switch is on.

NAV/ANC (9060-3114)

Operation

Press turns on the NAV & Anchor lights (**LED turns Green**)
Press leaves Anchor light on and turns off NAV light (**LED turns Blue**)
Press turns off Anchor light (**LED turns Blue**)



Laser-etched actuator with LED off for a clean look.



Blue LED enhances visibility and indicates switches are off.



Green LED indicates that the NAV/ANC switches are on.



Red LED indicates that the Anchor mode is on.

Purple LED indicates that a switch was tripped.

Off-On-On (9060-3113)

Operation

Press turns on Load 1 (**LED turns Green**)
Press turns on Load 2 (**LED turns Red**)
Press turns off both Loads (**LED turns Blue**)



Laser-etched actuator with LED off for a clean look.



Blue LED enhances visibility and indicates switches are off.



Green LED indicates that the NAV/ANC switches are on.



Red LED indicates that the Anchor mode is on.



Purple LED indicates that a switch was tripped.

Off-1-2-Both (9060-3115)

Operation

Press turns on Load 1 (**LED turns Green**)
Press turns on Load 2 (**LED turns Red**)
Press turns on both Loads (**LED turns Yellow**)
Press turns off both Loads (**LED turns Blue**)



Laser-etched actuator with LED off for a clean look.



Blue LED enhances visibility and indicates switches are off.



Red LED indicates that the Anchor mode is on.



Yellow LED indicates that both Loads are on.



Purple LED indicates that a switch was tripped.

Dual Momentary (9060-2123)

Operation

Press and hold turns on Load 1 (**LED turns Green**)
Press and hold turns on Load 2 (**LED turns Red**)
Release to turn off both Loads (**LED turns Blue**)



Laser-etched actuator with LED off for a clean look.



Blue LED enhances visibility and indicates switches are off.



Green LED indicates that the NAV/ANC switches are on.



Red LED indicates that the Anchor mode is on.



Purple LED indicates that a switch was tripped.

9057

19mm Electronic Switch

Upgrade your boat's electrical system with the **19mm Marine-Grade Switch**, built for durability and precision. It features smart **LED indicators**, glowing blue for back lighting and red when active for clear visibility. Designed for 15A single-channel or 7.5A dual-channel use, it's housed in SS316 stainless steel with an IP69K waterproof rating, ensuring **reliability in harsh marine conditions**.



FEATURES


- Power & Performance** – 15A max (1 channel) or 7.5A per channel (2 channels).
- Smart LED Indicators** – Blue back light at night, red LED when function is active.
- Marine-Grade Durability** – SS316 stainless steel body with IP69K waterproofing.
- Built for Harsh Conditions** – Salt spray resistant and 20g shock-tested.
- High Safety Standards** – UL 94 V2 flammability rated, heat-resistant to 105°C.
- Auto LED Feedback** – Red LED activates when the pump is running.

Function	Parts No.	Page #	Off	1st On	2nd On	Rear Mark Page
Off- On	9057 - 1113	28	(Blue)	Red	X	Red Dot
	9057 - 1123	28	(Green)	Blue	X	
Off - (On)	9057 - 2113	28	(Blue)	Red	X	Green Dot
	9057 - 2133	29	(Green)	Blue	X	
Off - (On) - (On)	9057 - 2123	29	(Blue)	Green	Red	Green Dot with a line
	9057 - 2223	29	(Green)	Blue	Red	
Off - On - On	9057 - 3113	30	(Blue)	Green	Red	Blue Dot
	9057 - 3123	30	(Green)	Blue	Red	
NAV/ANC	9057 - 3114	31	(Blue)	Green	Red	White Dot
Dimmer	9057 - 3116	31	(Blue)	Red	X	Black Dot

DIMMER

- Press and hold the button for 5 seconds at off mode (Blue* LED flash).
- Press the button to adjust the Blue* Back light level (3 levels)
- Wait for 3 seconds will set the light level automatically


*In models 9057-1123 and 9057-2223 Green LED will replace Blue LED

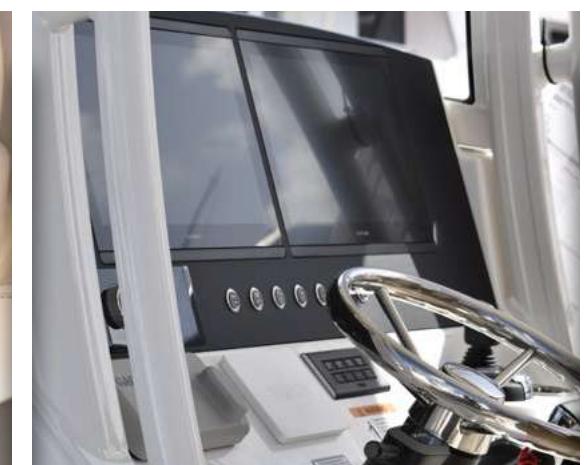

Off-On (9057-1113)

Operation


Press turns on the device **(LED turns Red)**
Press turns off the device **(LED turns Blue)**

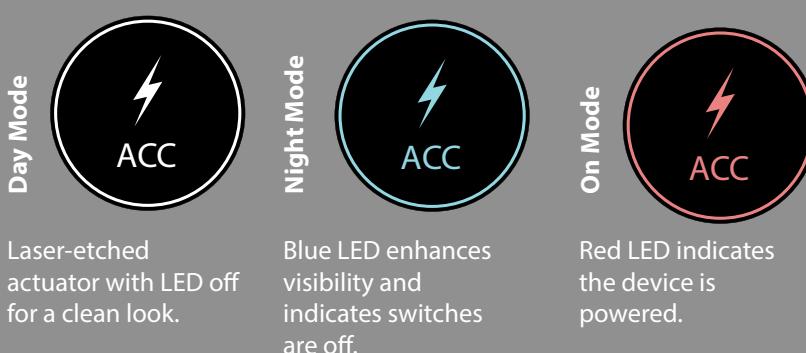

Off-On (9057-1123)

Operation


Press turns on the device **(LED turns Blue)**
Press turns off the device **(LED turns Green)**

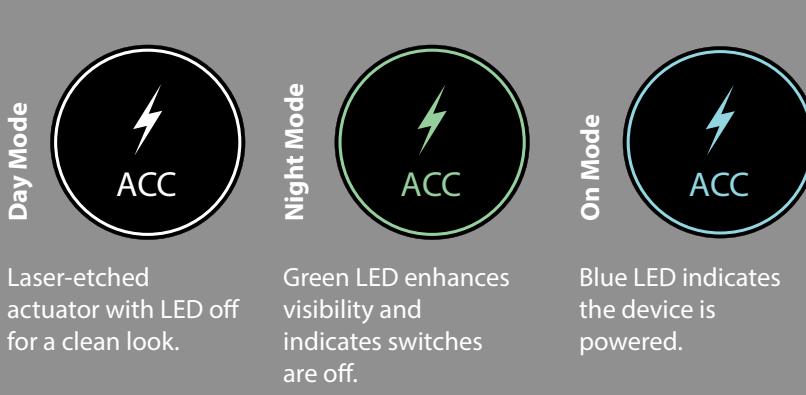

Off-(On) (9057-2113)

Operation


Press and hold turns on the device **(LED turns Red)**
Release the button turns off the device **(LED turns Blue)**

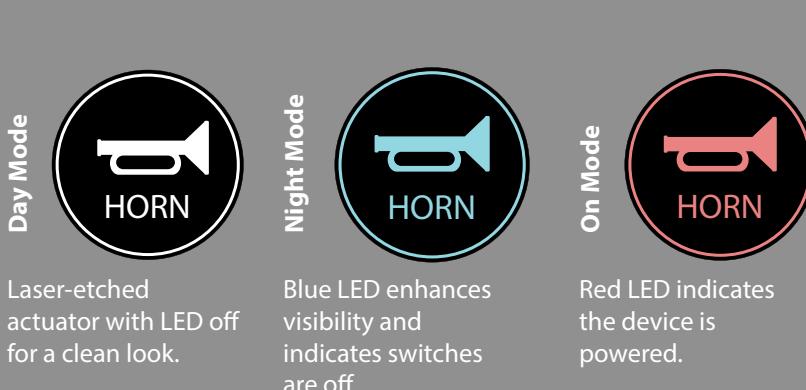

Off-(On) (9057-2133)

Operation

Press and hold turns on the device **(LED turns Blue)**
Release the button turns off the device **(LED turns Green)**

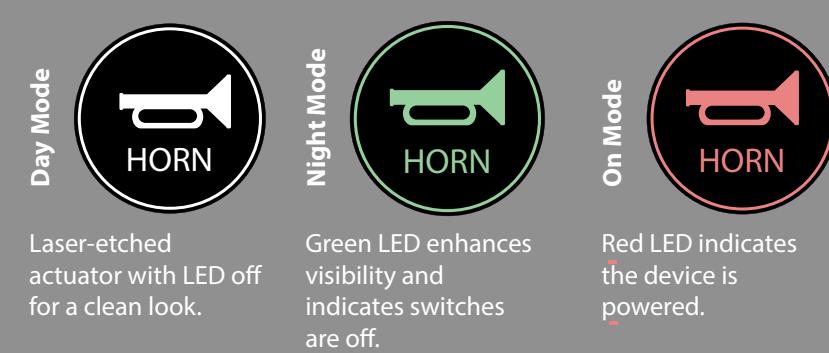

Dual Momentary (9057-2123)

Operation

Press and hold turns on Load 1 **(LED turns Green)**
Press and hold turns on Load 2 **(LED turns Red)**
Release the button turns off both Loads **(LED turns Blue)**



Dual Momentary (9057-2223)

Operation

Press and hold turns on Load 1 **(LED turns Blue)**
Press and hold turns on Load 2 **(LED turns Red)**
Release the button turns off both Loads **(LED turns Green)**




9057

Off-On-On (9057-3113)

Operation


- Press turns on Load 1 (**LED turns Green**)
- Press turns on Load 2 (**LED turns Red**)
- Press turns off Load 2 & 1 (**LED turns Blue**)

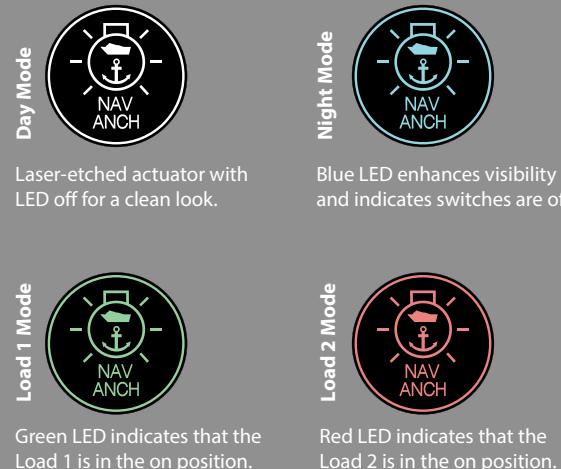

Off-On-On (9057-3123)

Operation


- Press turns on Load 1 (**LED turns Blue**)
- Press turns on Load 2 (**LED turns Red**)
- Press turns off Load 2 & 1 (**LED turns Green**)

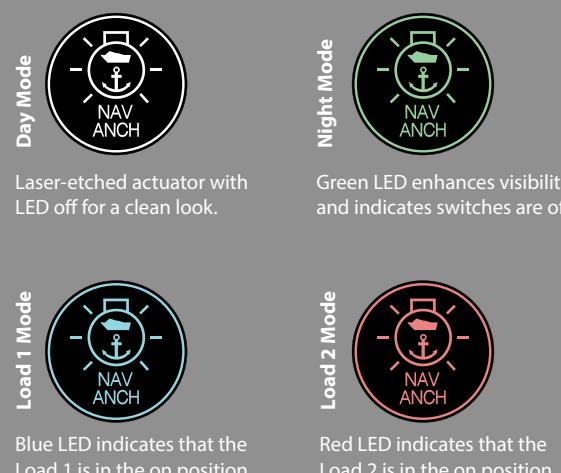

NAV/ANC (9057-3114)

Operation

- Press turns on the NAV/ANC lights (**LED turns Green**)
- Press leaves Anchor light on and turns off NAV lights (**LED turns Red**)
- Press turns off Anchor light. (**LED turns Blue**)

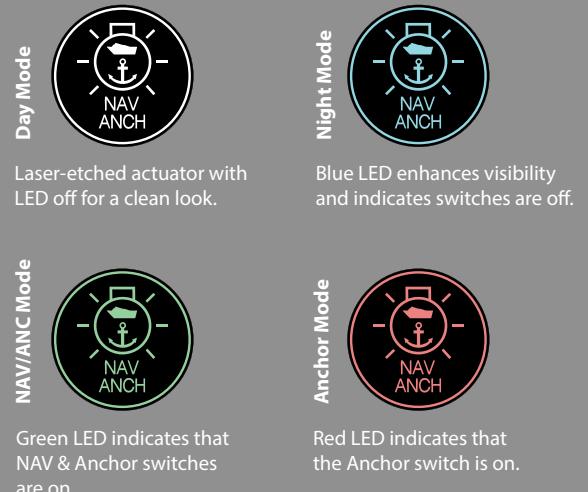

Dimmer (9057-3116)

Operation

- Press and hold to increase brightness. (**LED turns Red**)
- Press and hold again to dim the lights. (**LED turns Red**)
- Press once to turn the lights off.



CUSTOMIZABLE ACTUATORS

All actuators come in **laser-engraved** or **UV-printed** designs for lasting durability. Choose laser engraving for a sleek, fade-resistant finish or UV printing for bold, high-contrast visibility—both **built to withstand tough marine conditions**.



Replaceable Actuators Available

Style	Parts No.
Full Translucent	9451-1001
Stainless Steel Ring	9451-1002
Laser Logo (Black)	9451-1005



For **19mm** actuators, use product number **9551** before your selected actuator code (e.g., **9551-0074**)

For **22mm** actuators, use product number **9451** before your selected actuator code (e.g., **9451-0074**)

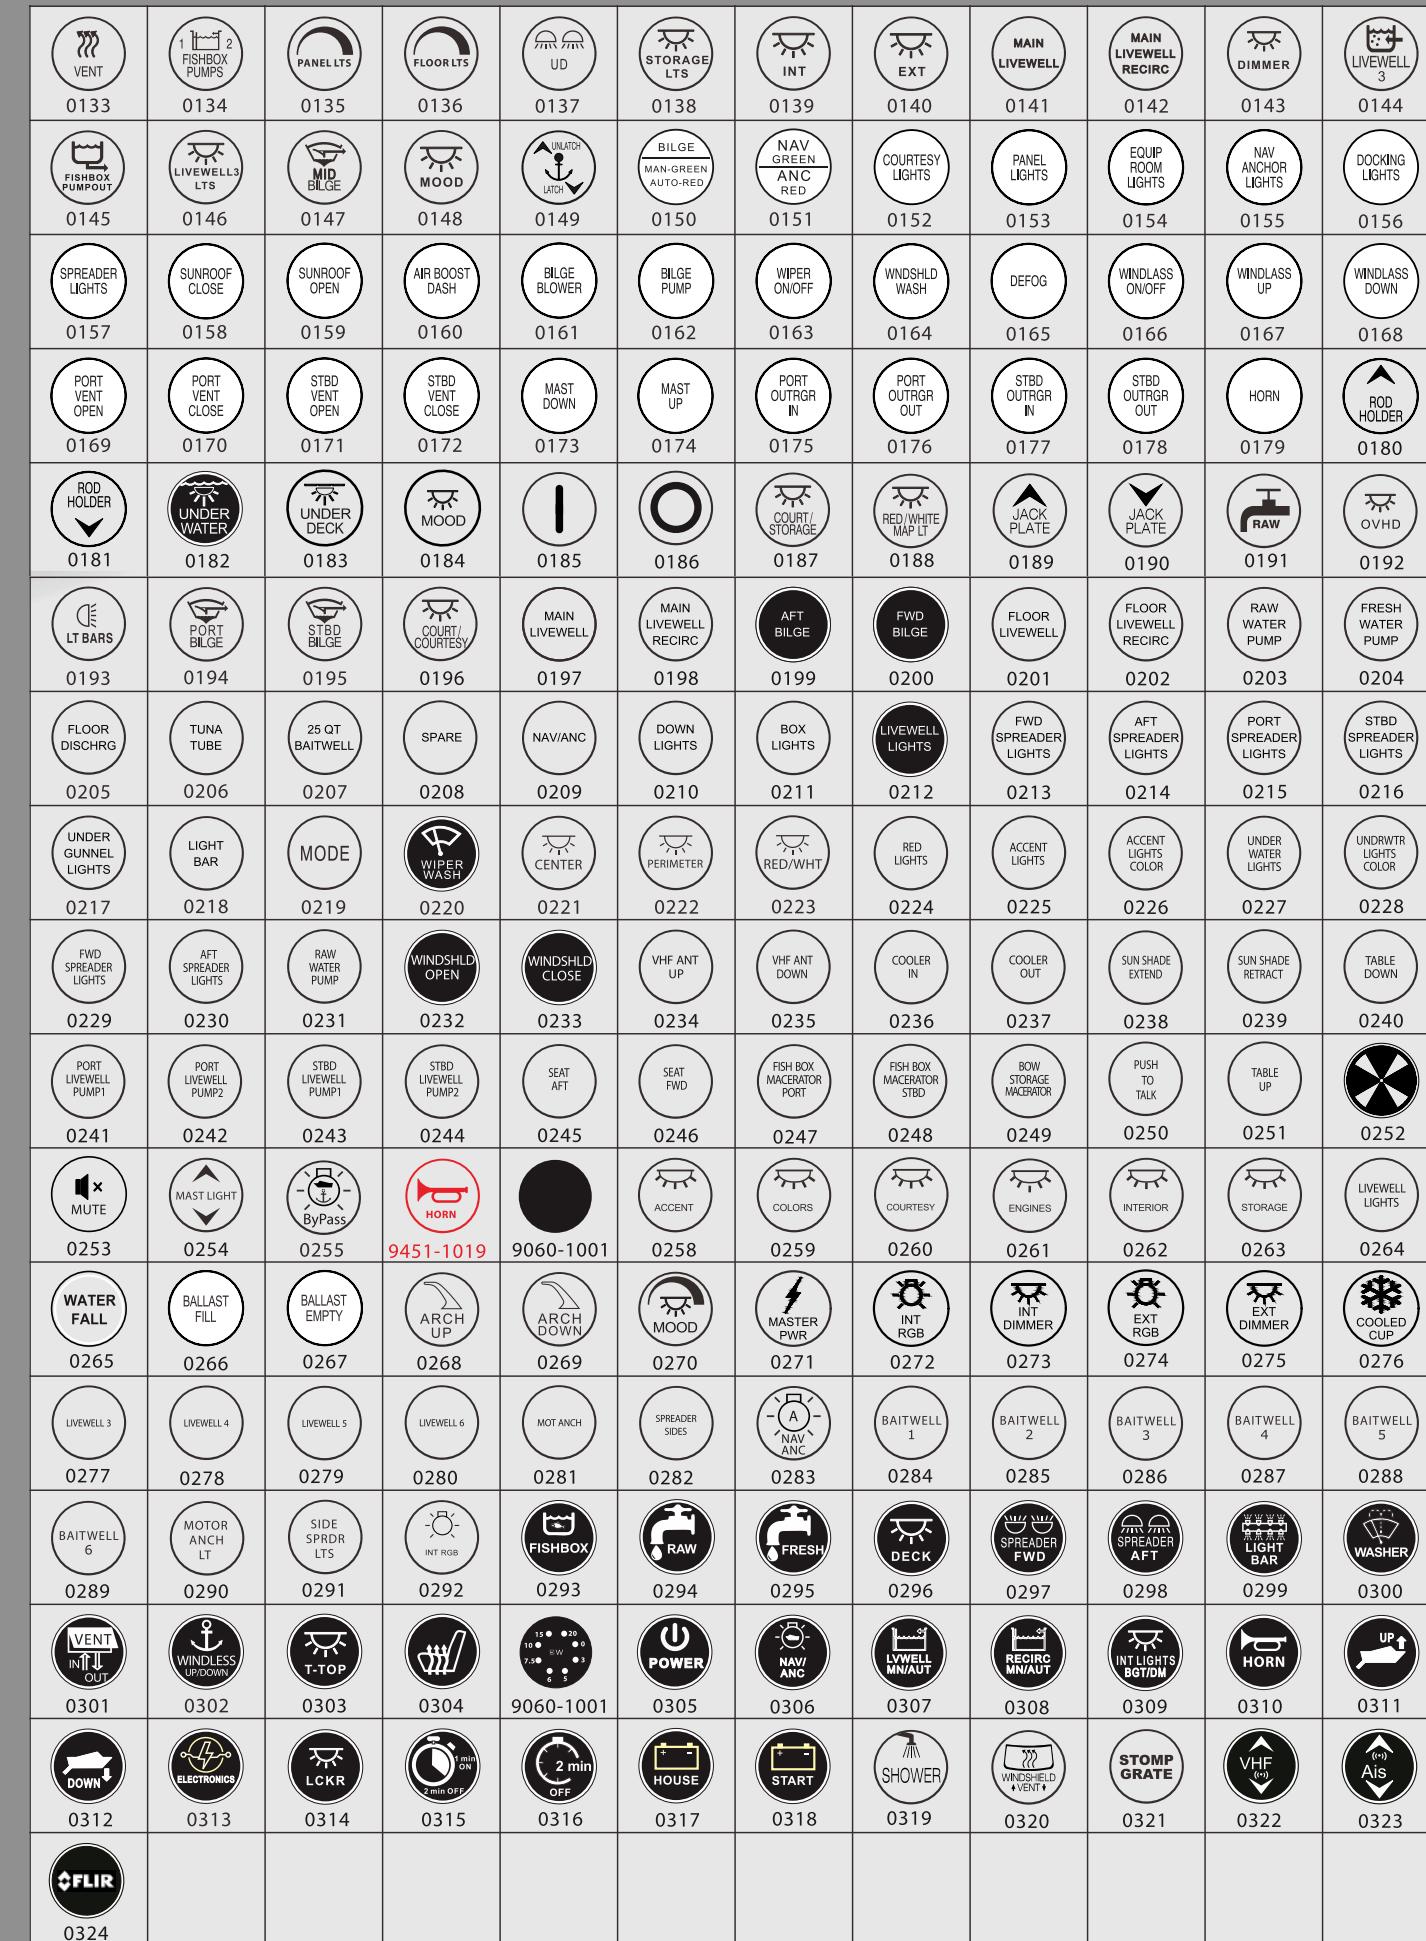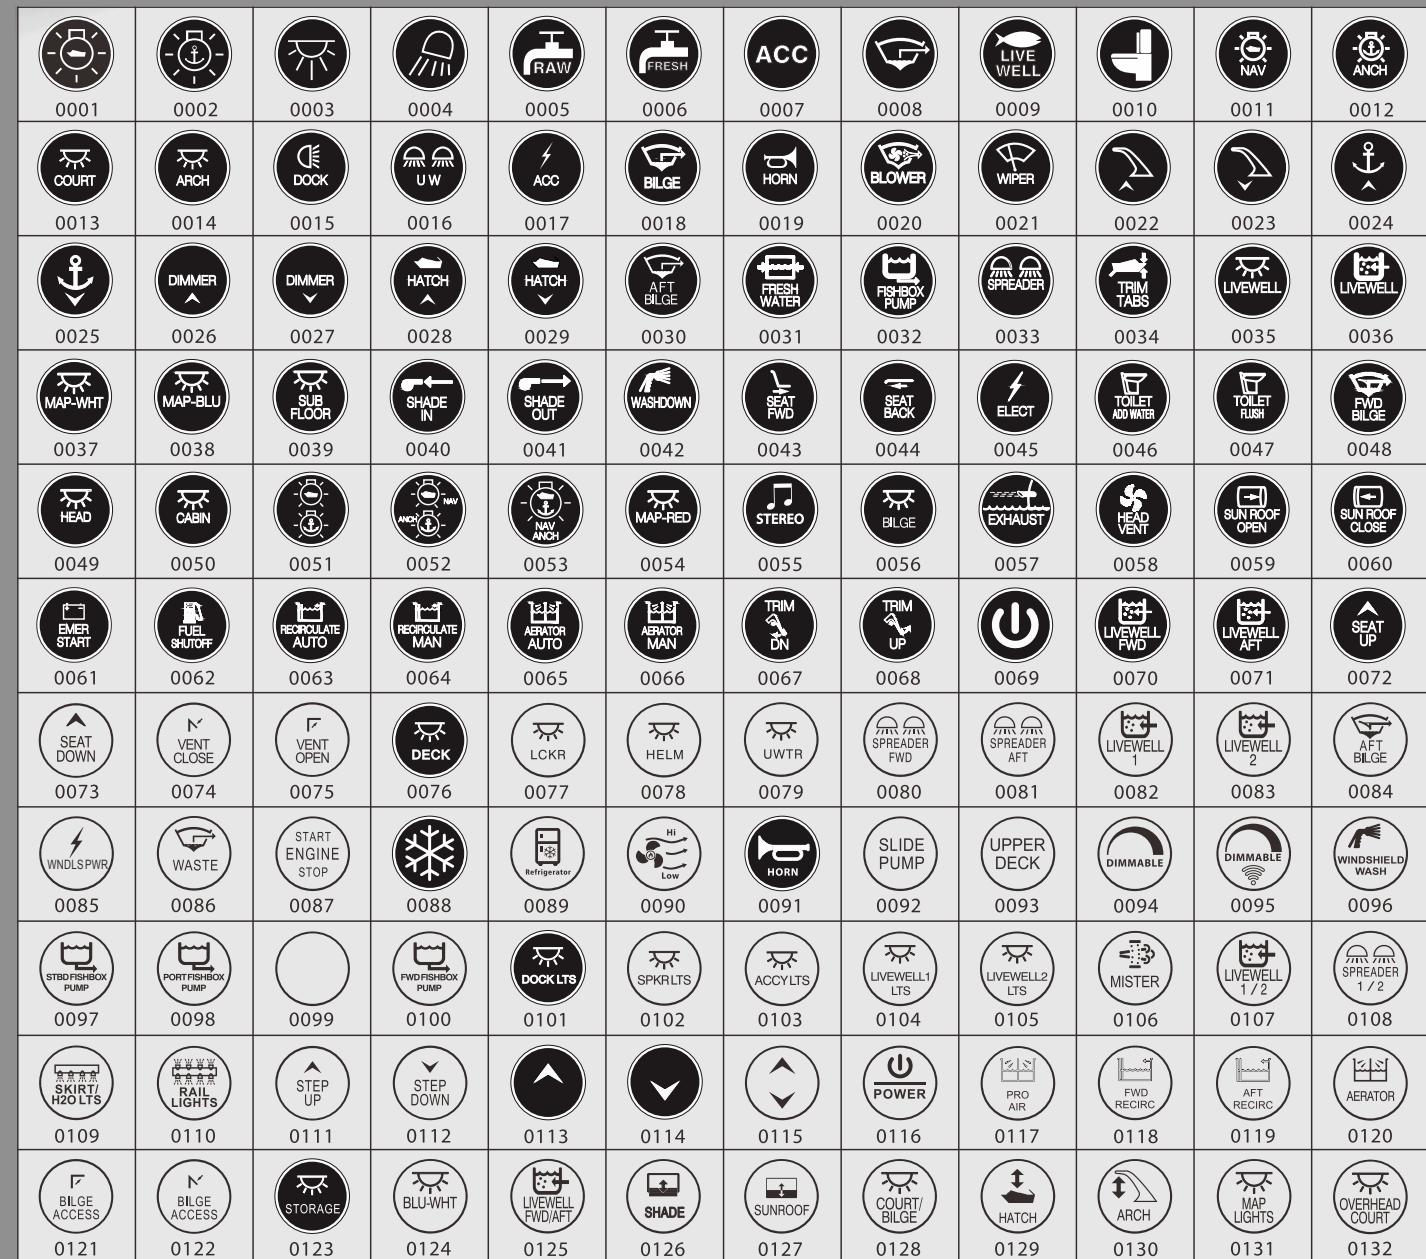

Switch Harnesses

Deutsch Switch Harness

22mm Harness: 9533914 - #xx # = number of outputs (1 or 2)
19mm Harness: 9574914 - #xx xx = length in inches (1ft increments)
Example Order: 9533914-136
*19mm Harness, 1 Output, 3ft

Available for both **19mm** and **22mm** switches, our harnesses are built for flexibility and durability in marine environments. Choose the 4 wire option for a **single output**, with a dummy plug included to seal the unused port, or the 5 wire version for **dual outputs**.



4 Wire / 1 Output
Switch Harness




5 Wire / 2 Output
Switch Harness


We cut to any wire length. Just contact us with what you need.

Y-Wire Harness

Our **Y-Wire harness** splits power or signal between two outputs. Built with marine grade materials, it offers a **clean and secure connection** in tight spaces.

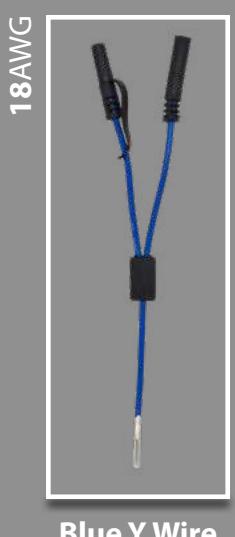

Blue Y Wire

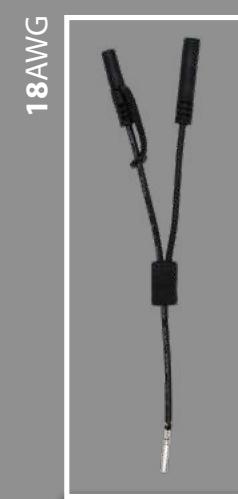

Black Y Wire



Orange Y Wire



B

BLUEWATER

ENTERPRISES

About Bluewater Enterprises

At Bluewater Enterprises, we're committed to delivering quality marine electronics at a price you can trust. Whether you're upgrading your vessel's systems or building from scratch, our range of switches, busbars, couplers, and cables are engineered to perform in the toughest marine environments.

Stay Connected

Explore our full product range, get installation tips, and stay current with new releases.

Website: www.bluewaternet.com

Email: sales@bluewaternet.com

Phone: (855)-2583-732


Address: 13620 49th St N Clearwater, FL 33762

Follow Us for Updates and Promotions

Facebook & LinkedIn: [@bluewaterenterprises](#)

Instagram: [@bluewater_gadgets](#)

*Bluewater Enterprises reserves the right to change product specifications or discontinue items without prior notice. Product details are provided as a guide and may vary from actual items.

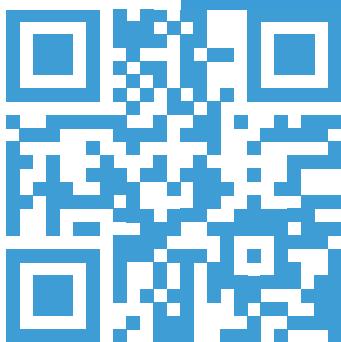

Scan our QR code to view our full product range online, or visit www.bluewaternet.com