


BLUΞWATERΞR  
ENTERPRISES

●  
●  
●  
●  
●

# 2026 PRODUCT CATALOG

Delivering Quality Electronics  
to Outfit your Voyage






# WELCOME ABOARD

At **Bluewater Enterprises**, we believe that quality marine electronics should not come at the expense of affordability. That is why we are committed to delivering rugged, reliable gear built to thrive in even the most demanding marine environments, whether you are refitting a vessel or starting fresh from the deck up.

We understand what the sea throws at you. That is why every component, from our switches to our cabling, is built to withstand salt, spray, and time.

### What you'll find inside

- Marine-Grade Switches
- High-Performance Busbars
- Compact, Rugged Couplers
- Customizable Actuators
- Durable NMEA Cables
- And More

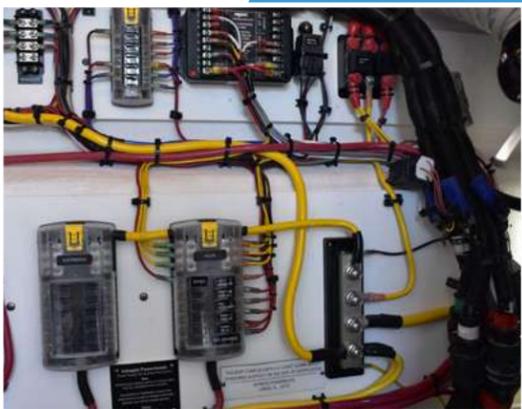

# TABLE OF CONTENTS



### Power Distribution



# PG 04

**Battery Switches, Busbars, Circuit Breakers, and Relays** built for safe, reliable power in demanding marine conditions.

### Switches



# PG 32

Durable **Mechanical** and **Electronic Switches** designed for precision control and long-term marine use.

### Connectors & Interfaces



# PG 60

Marine-grade **Deutsch Connectors** and **Receptacles** for secure, watertight electrical connections.

### Marine Data & Networking



# PG 72


**NMEA 2000 Cables** for fast, reliable marine network connectivity—plug-and-play ready.

### Mounting & Protection



# PG 80


**Rubber Boots, Seals, and Components** that protect your gear and ensure a secure fit.



# POWER DISTRIBUTION

## Power where it counts. Protection when it matters.

Your electrical system is only as strong as the components behind it. From **Battery Switches** to **Circuit Breakers, Busbars,** and **Relays,** our power distribution products manage current safely, isolate loads, and protect critical systems. Designed for the harsh realities of the marine environment such as salt spray, vibration, and time, every component is **built to perform** when it matters most. Whether wiring a new vessel or upgrading an older system, this is where reliable power begins.

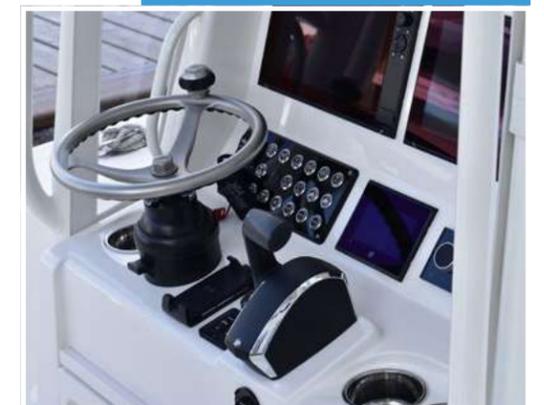


Product Category	Page #
Battery Switches	6-11
Busbars	12-21
Circuit Breakers	22-29
Relays	30-31

# BATTERY SWITCHES

Bluewater Enterprises offers high quality **Battery Switches** for marine power management. Built with **corrosion-resistant materials**, they ensure **secure connections** and **efficient distribution**. Engineered for durability and safety, our switches keep your boat powered and ready.

**Great For:** Reliable power management, battery isolation, and safe high-current handling with secure connections.

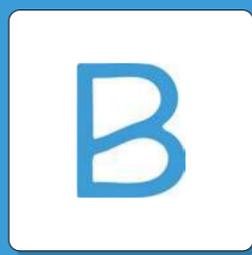

Battery Switches **MOQ** specified in product details.

## VOLTAGE & CABLES

### All Non-Motorized Switches

Max Voltage: 48VDC  
Cable Size: 4/0 AWG

### All Motorized Switches

Max Voltage: 16VDC  
Cable Size: 26 AWG  
Multipurpose 5 Wire



9800-006-10  
**Panel Mount**  
9800-006-11  
**Surface Mount**

## ON/OFF SWITCH

- Single Circuit Switch
- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.17"

**Continuous Rating:** 300 Amps DC  
**Intermittent Rating:** 500 Amps DC (5 min)  
**Cranking Rating:** 900 Amps DC (30 sec)  
**MOQ:** 10



9800-007-10  
**Panel Mount**  
9800-007-11  
**Surface Mount**

## OFF/1/2/BOTH SWITCH

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.17"

**Continuous Rating:** 300 Amps DC  
**Intermittent Rating:** 500 Amps DC (5 min)  
**Cranking Rating:** 900 Amps DC (30 sec)  
**MOQ:** 10



9800-008-10  
**Panel Mount**  
9800-008-11  
**Surface Mount**

## OFF/1/2 SWITCH

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.17"

**Continuous Rating:** 300 Amps DC  
**Intermittent Rating:** 500 Amps DC (5 min)  
**Cranking Rating:** 900 Amps DC (30 sec)  
**MOQ:** 10



9800-010-10  
**Panel Mount**  
9800-010-11  
**Surface Mount**

## ON/OFF DUAL CIRCUIT SWITCH

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.17"

**Continuous Rating:** 300 Amps DC  
**Intermittent Rating:** 450 Amps DC (5 min)  
**Cranking Rating:** 675 Amps DC (30 sec)  
**MOQ:** 10



9800-011-10  
**Panel Mount**  
9800-011-11  
**Surface Mount**

## ON/OFF DUAL CIRCUIT PLUS SWITCH

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.17"

**Continuous Rating:** 300 Amps DC  
**Intermittent Rating:** 450 Amps DC (5 min)  
**Cranking Rating:** 675 Amps DC (30 sec)  
**MOQ:** 10



9800-7101-00

## AUTO CHARGING RELAY

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.17"
- Automatically combines batteries when charging and isolates when not

**Continuous Rating:** 125 Amps  
**Intermittent Rating:** 140 Amps  
**MOQ:** 10



9800-206-11

## 2 STUD MOTORIZED BATTERY SWITCH OR VSR

**VSR** automatically connects or disconnects batteries based on voltage; a 2-stud switch can function as one if wired accordingly.

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.13"
- Available with Black, Red, or Yellow Knobs

**Continuous Rating:** 300 Amps DC  
**Intermittent Rating:** 500 Amps DC (5 min)  
**Cranking Rating:** 900 Amps DC (30 sec)  
**MOQ:** N/A



9800-211-11

## 4 STUD MOTORIZED BATTERY SWITCH W/ VSR

**VSR** automatically connects or disconnects batteries based on voltage level and is rated for 300 amps.

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.13"
- Available with Black, Red, or Yellow Knobs

**Continuous Rating:** 300 Amps DC  
**Intermittent Rating:** 500 Amps DC (5 min)  
**Cranking Rating:** 900 Amps DC (30 sec)  
**MOQ:** N/A



## MOTORIZED 32 VOLT SWITCH

- 3/8" - 16 Tin-Plated Copper Studs
- Distance Between Mounting Holes: 2.13"
- Available with Black, Red, or Yellow Knobs

**Continuous Rating:** 300 Amps DC  
**Intermittent Rating:** 500 Amps DC (5 min)  
**Cranking Rating:** 900 Amps DC (30 sec)  
**MOQ:** N/A

## REMOTE ROCKER SWITCH ORDERING GUIDE

Overview	Part #	Function
Our remote rocker switches pair perfectly with our motorized switches for easy engine control and auxiliary battery charging. A safety slide window prevents accidental shut-offs, while red, green, and yellow LEDs indicate power status.	*2022	(ON)-OFF-(ON)
	2145	(ON)-OFF-(ON)
	2146	ON-OFF-ON
	2155-C	ON-ON

\*All rocker switches have two lights, but the 2022 model features dual-color lighting.



## REMOTE ROCKER SWITCH W/ SLIDE WINDOW



- LED Power Indicators (Red, Yellow, Green)
- Safety Window
- 1.97" H x 1.0" W

**Tab size:** .250  
**Control rating:** 20A @4-14V / 15A @ 15-28V  
**MOQ:** N/A

## SOLENOID REMOTE SWITCH WIRE SIZE AND CURRENT RATINGS

Wire Size	Cranking 30 Sec.	Intermittent 5 Min.	Continuous (UL 1107)
2/0 AWG (70mm <sup>2</sup> )	1,000A	400A	225A
4/0 AWG (120mm <sup>2</sup> )	1,100A	400A	300A
2x4/0 AWG (2x120mm <sup>2</sup> )	1,450A	700A	500A

## SWITCH HOLDER DIAGRAMS

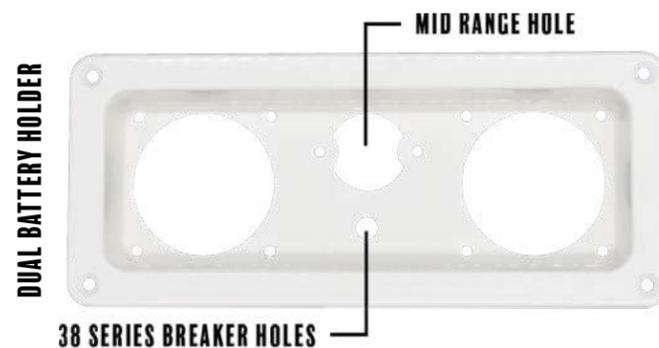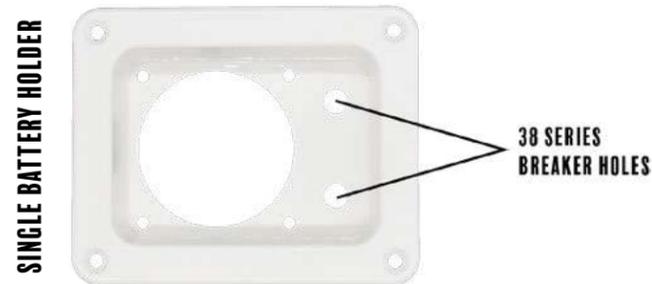

9805-7700-0 (Latching)  
9805-7713-0 (Auto Release)

## SOLENOID REMOTE SWITCH

- Mounting Holes 0.21"
- Distance Between Mounting Holes: 2.99"

**Terminal Stud Size:** 3/8" - 16  
**Control Voltage:** 9 -16VDC  
**MOQ:** N/A



9805-7101-0 (Latching)

## SOLENOID REMOTE AUTO CHARGING RELAY

- Mounting Holes 0.19"
- Distance Between Mounting Holes: 2.13"

**Terminal Stud Size:** 3/8" - 16  
**Control Voltage:** 9 -16VDC  
**MOQ:** N/A



## SINGLE BATTERY SWITCH HOLDER

- **Standard**  
White: 17000-001-001  
Black: 17000-001-000
  - **With 38 Series Breaker Holes**  
White: 17000-002-001  
Black: 17000-002-000
- MOQ:** N/A




## DUAL BATTERY SWITCH HOLDER

- **Standard**  
White: 17000-003-001  
Black: 17000-003-000
  - **With 38 Series Breaker Holes**  
White: 17000-004-001  
Black: 17000-004-000
  - **With Mid-Range & 38 Series Breaker Holes**  
White: 17000-005-001  
Black: 17000-005-000
- MOQ:** N/A

# BUSBARS

Bluewater Enterprises offers **Heavy Duty** and **Common Busbars, Sealed Busbars, and Power Posts** designed for secure power distribution in marine systems. Available in **multiple amperage** options, these units handle high currents reliably, resist harsh conditions, and are easy to install.

**Great For:** Reliable Marine Power Distribution, Reducing Wiring Clutter, and Handling 100A to 600A With Secure Connections.

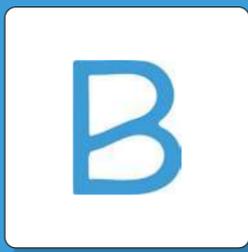

Busbar **MOQ** specified in product details.



## 5 POSITION BUSBAR 100 AMP

- 1/4" Stud Size Stainless Steel
- Mounting Holes 0.20"
- Distance Between Mounting Holes: 3.56"
- Take 5.32" Pan Head Machine Screws

**Max Voltage:** 300V/48VDC  
**Current Rating:** 100 A  
**MOQ:** 16 / Cover (25)



## TERMINAL BLOCK STYLE 10 GANG - 150 AMP

- 1/4" Stud Size Stainless Steel
- Mounting Holes 0.21"
- Distance Between Mounting Holes: 5.25"
- Take 5.32" Pan Head Machine Screws

**Max Voltage:** 300V/48VDC  
**Current Rating:** 150 A  
**MOQ:** 10 / Cover (25)



## TERMINAL BLOCK STYLE 20 GANG - 150 AMP

- 1/4" Stud Size Stainless Steel
- Mounting Holes 0.21"
- Distance Between Mounting Holes: 8.25"
- Take 5.32" Pan Head Machine Screws

**Max Voltage:** 300V/48VDC  
**Current Rating:** 150 A  
**MOQ:** 10 / Cover (25)



## TERMINAL BLOCK STYLE 12 GANG - 250 AMP

- 1/4" Stud Size Stainless Steel
- Mounting Holes. 0225"
- Distance Between Mounting Holes: 8.50"
- Take 5/32" Pan Head Machine Screw

**Max Voltage:** 300V/48VDC  
**Current Rating:** 250 A  
**MOQ:** 10 / Cover (20)



## TERMINAL BLOCK STYLE 10 GANG - 150 AMP DUAL STUDS

- 5/16" Stud Size Stainless Steel
- Mounting Holes 0.20"
- Distance Between Mounting Holes: 1.88"
- Take 5/32" Pan Head Machine Screw

**Max Voltage:** 300V/48VDC  
**Current Rating:** 150 A  
**MOQ:** 10



## RGB BUSBAR

- Mounting Holes. 0.0225"
- Distance Between Mounting Holes: 4.5"
- Take 5/32" Pan Head Machine Screw

**Max Voltage:** 300V/48VDC  
**Current Rating:** 100 A  
**MOQ:** 10



### COMMON STUD BUSBAR 4 GANG

- 1/4" Stud Size Stainless Steel
- Mounting Holes 0.21"
- Distance Between Mounting Holes: 5.25"

**Max Voltage:** 300V/48VDC  
**Current Rating:** 150 A  
**MOQ:** 10



### HEAVY DUTY STUD BUSBAR 4 GANG

- 3/8"-16 Stud Size Stainless Steel
- Mounting Holes
- Distance Between Mounting Holes: 6.26"

**Max Voltage:** 300V/48VDC  
**Current Rating:** 600 A  
**MOQ:** 5



### HEAVY DUTY STUD BUSBAR 8 GANG

- 3/8"-16 Stud Size Stainless Steel
- Mounting Holes
- Distance Between Mounting Holes: 11.13"


**Max Voltage:** 300V/48VDC  
**Current Rating:** 600 A  
**MOQ:** 5



### COMMON STUD BUSBAR 4 GANG - POSITIVE TERMINAL BLOCK

- 3/8" Terminals
- Mounting Holes. 0.25"
- Distance Between Mounting Holes: 5.7"
- Take 5/32" Pan Head Machine Screw

**Max Voltage:** 300V/48VDC  
**Current Rating:** 250 A  
**MOQ:** 10

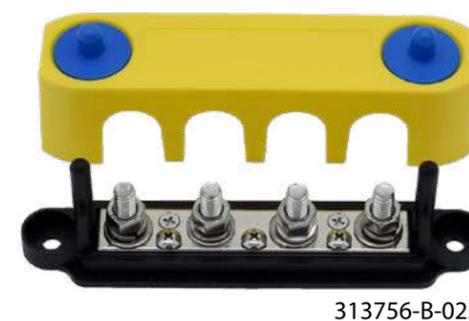

### COMMON STUD BUSBAR 4 GANG - NEGATIVE TERMINAL BLOCK

- 5/16" Terminals
- Mounting Holes. 0.25"
- Distance Between Mounting Holes: 5.7"
- Take 5/32" Pan Head Machine Screw

**Max Voltage:** 300V/48VDC  
**Current Rating:** 250 A  
**MOQ:** 10



### DUAL 4 GANG BUSBAR

- 3/8" And 5/16" Terminals
- Mounting Holes. 0.25"
- Distance Between Mounting Holes: 5"
- Take 5/32" Pan Head Machine Screw

**Max Voltage:** 300V/48VDC  
**Current Rating:** 250 A  
**MOQ:** 6



312311-B-020 Cover: 312311-B-021

### DUAL STUD BUSBAR 3/8"

- 3/8" Terminals
- Mounting Holes. 0.225"
- Distance Between Mounting Holes: 1.425"

**Max Voltage:** 48VDC  
**Current Rating:** 200 A  
**MOQ:** 5



3/8: 312311-A-024  
 5/16: 312311-A-025

### DUAL STUD BUSBAR COPPER LINK

- 3/8" And 5/16" Terminals Available
- Mounting Holes. 0.225"
- Distance Between Mounting Holes: 1.425"

**Max Voltage:** 48VDC  
**Current Rating:** 200 A  
**MOQ:** N/A



312311-B-008

### LINK BAR DUAL 10MM 3/8-3/8 COPPER NICKEL PLATED



314300-R-038

### POWER POST RED 3/8"

- 3/8" Terminals
- Mounting Holes 0.225"
- Distance Between Mounting Holes: 1-5/16"

**Max Voltage:** 48VDC  
**Current Rating:** 250 A  
**MOQ:** N/A



314300-B-038

### POWER POST BLACK 3/8"

- 3/8" Terminals
- Mounting Holes 0.225"
- Distance Between Mounting Holes: 1-5/16"

**Max Voltage:** 48VDC  
**Current Rating:** 250 A  
**MOQ:** N/A



314300-B-516

### POWER POST BLACK 5/16"

- 5/16" Terminals
- Mounting Holes 0.225"
- Distance Between Mounting Holes: 1-5/16"

**Max Voltage:** 48VDC  
**Current Rating:** 250 A  
**MOQ:** N/A



DTP04-4P-B4

### DTP BUSBAR

- Mating Connector
- Sealed Ip67

**Max Voltage:** 48VDC  
**Current Rating:** 100 A. 25 A per contact  
**MOQ:** N/A



2314-D-014 (1/4")  
 2314-D-056 (5/16")

### SEALED DT BUSBAR

- 1/4" Or 5/16" Busbar
- Mounting Holes 0.225"
- Distance Between Mounting Holes 1.7"
- Take 5.32" Pan Head Machine Screws
- Sealed IP67

**Max Voltage:** 48VDC  
**Current Rating:** 150 A  
**MOQ:** N/A



2314-D-256

### SEALED DUAL DT 12 POSITION BUSBAR

- 5/16" Terminals
- Mounting Holes 0.225"
- Distance Between Mounting Holes 3.8"
- Take 5.32" Pan Head Machine Screws
- Sealed IP67

**Max Voltage:** 48VDC  
**Current Rating:** 300 A  
**MOQ:** N/A



2324-D-056

### SEALED DTP 4 POSITION BUSBAR

- 5/16" Terminals
- Mounting Holes 0.175"
- Distance Between Mounting Holes 4"
- Take 5/32" Pan Head Machine Screw
- Sealed IP67

**Max Voltage:** 48VDC  
**Current Rating:** 200 A  
**MOQ:** N/A



2314-B-000 (Dual Stud)

### SEALED FCI BUSBAR

- 5/16" Terminals
- Mounting Holes 0.175"
- Distance Between Mounting Holes 4"
- Take 5/32" Pan Head Machine Screw
- Sealed IP67

**Max Voltage:** 48VDC  
**Current Rating:** 150 A  
**MOQ:** N/A



2312-D-256

### DEUTSCH 20 POSITION BUSBAR

- 5/16" Terminals
- Mounting Holes 0.20"
- Distance Between Mounting Holes 2.87"
- Sealed IP68

**Max Voltage:** 48VDC  
**Current Rating:** 350 A  
**MOQ:** N/A



16000-01-0A

### SNAP TERMINAL STRIP END PIECE PART A

- Mounting Holes 0.125"
- Distance Between Mounting Holes: 0.40"
- **MOQ:** 25



16000-02-0B

### SNAP TERMINAL STRIP SCREW PIECE PART B NICKEL PLATED COPPER

- Mounting Holes 0.125"
- Distance Between Mounting Holes: 0.40"
- Current Rating 30 A
- **MOQ:** 25



16000-03-0T

### TWEEZERS FOR SNAP 30A TERMINAL STRIP


- Used for the Disconnection of Terminals



16000-02-0J

### 30 A TERMINAL STRIP JUMPER NICKEL PLATED COPPER

- **MOQ:** 25

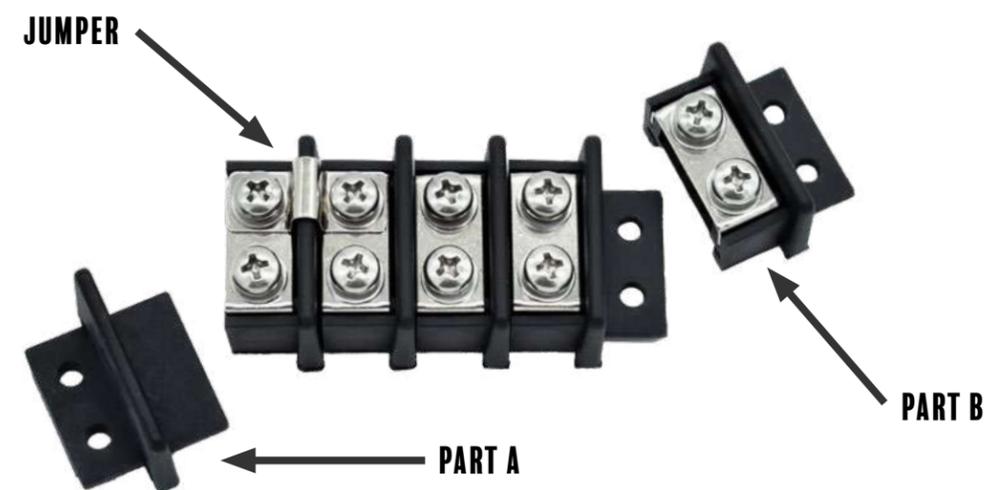


### 30 A TERMINAL STRIP LAYOUT

- Customize Your Setup to Fit Your Exact Needs
- Combine Part B to Desired Length, Then Cap Off with Part A to Create Terminal Strip
- Easily Link Them Together Using Our Nickel Plated Copper Jumper

# CIRCUIT BREAKERS

Bluewater Enterprises offers **Circuit Breakers, Shortstops, Fuses, and Fuse Boxes** for reliable protection in marine systems. Built for **durability** and **performance**, they guard against overloads and shorts in demanding conditions. Available in **multiple ratings**, they suit engines, lighting, and vital on board circuits. These units are easy to install and built to last.

**Great For:** Reliable Circuit Protection, Simplifying Wiring, and Safely Handling 3A to 250A With Secure Connections.



Circuit Breaker **MOQ** specified in product details.



77000-9600-xxx  
\*xxx indicates amp rating

## HIGH AMP PANEL MOUNT

- 1/4" Stud Size Stainless Steel
- Mounting Holes 0.26"
- Distance Between Mounting Holes: 2.2"

**Max Voltage:** 32VDC/48VDC  
**Current Rating:** 30 - 150A  
**MOQ:** 20



77000-9900-xxx  
\*xxx indicates amp rating

## HIGH AMP SURFACE MOUNT

- 1/4" Stud Size Stainless Steel
- Mounting Holes 0.26"
- Distance Between Mounting Holes: 2.1" H / 1.3" W

**Max Voltage:** 32VDC/48VDC  
**Available Amps:** 30 - 150A  
**MOQ:** 20



**Panel Mount**  
78000-9600-xx  
\*xx indicates amp rating  
Options listed below



**Surface Mount**  
78000-9900-xx  
\*xx indicates amp rating  
Options listed below

## MID-RANGE BREAKER

- Mounting Holes 0.09" **Panel Mount**
- Distance Between Mounting Holes: 1.4"
- Mounting Holes 0.23" **Surface Mount**
- Distance Between Mounting Holes: 1.4" H / 0.75" W

**Max Voltage:** 32VDC  
**Available Amps:** 20, 30, 40, 50, 60A  
**MOQ:** 20



38-xx-#####-P00NB1  
\*x indicates amp rating  
\*# Indicates part option

## 38 SERIES BREAKER

- Mounting Holes 0.1" (J Hook)
- Distance Between Mounting Holes: 0.44"
- .250 Tab

**Max Voltage:** 32/50VDC  
**Current Rating:** 3 - 30A  
**MOQ:** 200

## HIGH AMP BREAKER ORDERING GUIDE

<b>Parts Available</b>	77000-9600 Panel Mount 77000-9900 Surface Mount
<b>AMPS Available</b> <small>*indicates only available with surface mount</small>	30,35,40,50,60,70,80,90 100,110,120,*130, 150, *200, *250
<b>Example Order</b>	77000-9900-030 (High Amp Surface Mount) - (30 Amp)

## 38 SERIES ORDERING GUIDE

<b>Part Options</b>	Black Marked Thermal Breaker P3X16 White Marked Thermal Breaker P3Y16 Black Marked 90 degree screw P3XJ6
<b>AMPS Available</b>	3, 4, 5, 6, 7, 8, 10, 12, 15, 20, 25, 30
<b>Example Order</b>	38-03-P3XJ6-P00NB1 (3 Amp) - (Black Marked 90 degree screw)

\*Some Part Options Are Not Available With Certain Amperages



# ATC FUSES B SHORT STOPS



8700 - xx - #  
\*x indicates amp  
\*# Indicates part option

## SHORT STOP BREAKER W/ COVER

- 5/16" Stud Size Stainless Steel
- Mounting Holes 0.20"
- Distance Between Mounting Holes: 1.88"
- Take 5/32" Pan Head Machine Screw

**Max Voltage:** 14VDC/28VDC  
**Available Amps:** 3 - 50A  
**MOQ:** 100



8710-00-00

## SHORT STOP BOOT

- Protected Boot / Isolation Cover



77011-8000-003  
**3 Amps**

77011-8000-005  
**5 Amps**

## MINI ATC RESETTABLE FUSE

- 0.354" H / 0.197" W
- Manual Push Reset
- Single Pole, Normal Closed
- Fuse is color coded to amp ratings

**Max Voltage:** 58VDC  
**Available Amps:** 3 - 30A  
**MOQ:** 100



77001-8000-xxx

## ATC RESETTABLE FUSE

- 1.18" H / 0.78" W
- Manual Push Reset
- Single Pole, Normal Closed
- Fuse is color coded to amp ratings

**Max Voltage:** 12VDC  
**Available Amps:** 5 - 30A  
**MOQ:** 100

## SHORT STOP ORDERING GUIDE

<b>Parts Available</b> -XX- for AMP Rating	 Parts #: 8700-XX-1  Parts #: 8700-XX-2
<b>AMPS Available</b>	5-50
<b>Example Order</b>	8700-30-2 (Short Stop) - (30 Amp) - (Part 2)

## ATC FUSE ORDERING GUIDE

<b>Parts Available</b>	77011-8000 (Mini) 77001-8000
<b>AMPS Available</b> <small>*indicates only available with non-Mini ATC</small>	3, 5, 6, 6.5, 7.5, 10, 15, 20, *25, 30
<b>Example Order</b>	77011-8000-030 (Mini ATC Fuse) - (30 Amp)



3200-2001-006  
6 Position

3200-2001-012  
12 Position

## 6 & 12 POSITION BREAKER BLOCK

- M5 main connecting studs
- Mounting Holes 0.1695
- Distance Between Mounting Holes:  
6 Position: 3.74" H / 3.54" W  
12 Position: 6.61" H / 3.54" W

**Max Voltage:** 48VDC  
**Current Rating:** 100A (6p) / 200A (12p)  
**MOQ:** N/A



3200-0001-006  
6 Position

3200-0001-012  
12 Position

## 6 & 12 POSITION FUSE BLOCK WITH LEDS

- M5 main connecting studs
- Mounting Holes. 0.1695"
- Distance Between Mounting Holes:  
6 Position: 2.825" H / 2.725" W  
12 Position: 4.725" H / 2.725" W

**Max Voltage:** 48VDC  
**Current Rating:** 100A  
**MOQ:** N/A



3200-3001-012

## 12 POSITION ATC FUSE BLOCK WITH LED

- M5 main connecting studs
- Mounting Holes 0.1695
- Distance Between Mounting Holes:  
4.85" H / 2.76" W

**Max Voltage:** 48VDC  
**Current Rating:** 200A  
**MOQ:** N/A



3200-3003-006  
6 Position

3200-3003-012  
12 Position

## 6 & 12 POSITION FUSE BLOCK

- M5 main connecting studs
- Mounting Holes. 0.1750"
- Distance Between Mounting Holes:  
6 Position: 3.709" H / 2.331" W  
12 Position: 5.285" H / 2.325" W

**Max Voltage:** 48VDC  
**Current Rating:** 100A (6p) / 200A (12p)



3200-100-006  
6 Position

3200-100-010  
10 Position

## 6 & 12 POSITION FUSE BLOCK

- M5 main connecting studs
- Mounting Holes. 0.1695"
- Distance Between Mounting Holes:  
6 Position: 0.65" H / 1.125" W  
10 Position: 1.925" H / 1.125" W

**Max Voltage:** 48VDC  
**Current Rating:** 100A (6p) / 200A (10p)  
**MOQ:** N/A



3000-4001-00

## SAFETY HUB

- M8 main connecting studs
- Mounting Holes. 0.2360"
- Distance Between Mounting Holes:  
3.995" H / 4.705" W

**Max Voltage:** 48VDC  
**Current Rating:** 100A



3200-1101-006

### 6 POSITION ATC FUSE BLOCK

- M5 main connecting studs
- Mounting Holes 0.1695
- Distance Between Mounting Holes: 3.43" H / 1.25" W

**Max Voltage:** 48VDC  
**Current Rating:** 100A  
**MOQ:** N/A



3000-1101-012

### 12 POSITION ATC BREAKER BLOCK

- M5 main connecting studs
- Mounting Holes 0.1695
- Distance Between Mounting Holes: 6.875" H / 1.25" W

**Max Voltage:** 48VDC  
**Current Rating:** 200A  
**MOQ:** N/A



1200500-0092

### IN LINE CIRCUIT BREAKER HOLDER

- Gasket-sealed for waterproof protection
- Clear cap for easy resets
- Mounting tab

**MOQ:** N/A



1200100-0092  
**Kit**

1200101-0092  
**Terminal Only**

### IN LINE FUSE HOLDER

- Sealed IP67
- ATC Fuse Holder
- Mounting Tab

**MOQ:** N/A



353-11035-C

### C-SERIES POWER SELECTOR

**MOQ:** N/A



1300600-0092

### BLACK TOGGLE

**MOQ:** 100



1500-909-000

### ELCI COVER

**MOQ:** N/A



1300400-0092

**Black**

1300411-0092

**Clear**


### CIRCUIT BREAKER BOOT

**MOQ:** 100

# SEALED RELAYS

Bluewater Enterprises Sealed Relays and Modules deliver reliable switching power in harsh marine conditions. Rated at 40 or 80 amps, they are built to handle high current loads and resist moisture, salt, and vibration. They are ideal for engines, lighting, and other demanding systems. These compact modules make installation easy.

**Great For:** Reliable high-current switching in tough marine conditions.

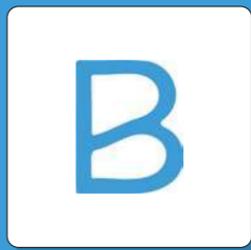

Relay **MOQ** specified in product details.



## 40 AMP SEALED RELAY

- IP69 Sealed
- Voltage range: 12 - 24v
- Connecting Studs 2x #10/32

2301-0002-A (No Hardware)  
 2301-0002-B (w/ Hardware)  
**MOQ: 16**

### Hardware Includes:

- 2x #8/32 Nuts
- 4x #10/32 Nuts



## 80 AMP SEALED RELAY

- IP69 Sealed
- Voltage range: 12 - 24v
- Connecting Studs 2x #10/32

2301-0082-A  
**MOQ: 16**



## MOTOR REVERSING MODULE

- 4x #10/32 Connecting Studs
- 2x #8/32 Connecting Studs
- IP69 Sealed
- Voltage range: 12 - 24v
- 80 amp reverse


2300-1001-A (No Hardware)  
 2300-1001-B (w/ Hardware)  
**MOQ: 5**



## SENSOR MODULE WASTE TANK PCB

- IP69 Sealed Deutsch connector
- Mounting hole: .20"
- Distance between holes: 2.5"

2301-1777-01  
**MOQ: 5**



# SWITCH OPTIONS

## Control when you need it. Reliability when it counts.


Your system's control depends on the **switches** that power it. From **Mechanical** to **Electronic Switches**, our products are designed for **precision** and **durability** in demanding marine environments. Engineered to withstand salt spray, vibration, and time, they provide secure and consistent operation for power circuits and critical systems. Available in 19mm or 22mm, these switches ensure reliable performance and easy installation. Tested for millions of cycles; they deliver **long lasting performance** and **ease of installation**. Whether outfitting a new vessel or upgrading an existing one, this is where **dependable control** begins.

Product Category	Page #
Mechanical Switches	34-43
Electronic Switches	44-55
Actuators / Harnesses	56-59



# MECHANICAL SWITCHES

Bluewater Enterprises offers durable mechanical switches in **19 mm** and **22 mm** sizes that deliver a solid tactile response in marine environments, along with **pre-assembled wired versions** for easy installation. The wired switches include marine grade leads to save time and ensure consistent performance. Whether integrating into new builds or enhancing existing systems, you can count on our switches for **precise, reliable control**.

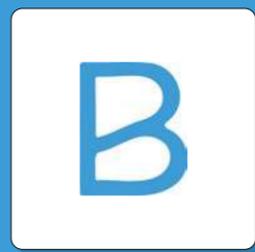

**MOQ** for switches is **50**, unless otherwise listed.

## THINGS TO KNOW

- **Mechanical vs. Electrical Switches:** Mechanical switches toggle or rocker control systems through direct physical connections. Electrical switches use electrical signals to activate components without a direct mechanical link.
- **Back Tabs:** Switches have different back tab configurations with 2, 3, or more terminals depending on their function. These variations allow for features like LEDs or multiple control positions.
- **Momentary vs. On/Off Functions:** Momentary switches activate only while pressed, which are ideal for functions like horns or starters. On/Off switches stay in position and are used for devices like lights and bilge pumps.

## SWITCH INDEX

1. **19mm Switches** - Pg. 36 - 37
2. **22mm Switches** - Pg. 38 - 39
3. **19mm Pre-Wired** - Pg. 40 - 42
4. **20mm Pre-Wired** - Pg. 43



# 19MM SWITCHES

MOQ: 50



## BACK TABS



**Style:** SS w/ Blue Ring  
**LED Color:** Blue  
**Back Tab:** 3  
 9150-1000 (On/Off)  
 9150-2000 (Momentary)

**Style:** Black w/ Blue Ring  
**LED Color:** Blue  
**Back Tab:** 3  
 9150-1030 (On/Off)  
 9150-2030 (Momentary)

**Style:** SS w/ Knob  
**LED Color:** None  
**Back Tab:** 3  
 9150-1107

**Button:** SS w/ Translucent Center  
**LED Color:** RGB  
**Back Tab:** 4  
 9150-1003 (On/Off)  
 9150-2003 (Momentary)

**Button:** Machined Head  
**LED Color:** None  
**Back Tab:** 1  
 9150-1045 (On/Off)  
 9150-2045 (Momentary)

**Button:** Black w/ Translucent Ring  
**LED Color:** Blue  
**Back Tab:** 3  
 9150-1130 (On/Off)  
 9150-2130 (Momentary)

**Button:** SS w/ Translucent Center  
**LED Color:** Blue/Green  
**Back Tab:** 3  
 9150-1003-A (On/Off)  
 9150-2003-A (Momentary)

**Button:** SS w/ Translucent Ring  
**LED Color:** Blue  
**Back Tab:** 3  
 9150-1100 (On/Off)  
 9150-2100 (Momentary)

**Button:** Black w/ Translucent Ring  
**LED Color:** Red  
**Back Tab:** 3  
 9150-1131 (On/Off)  
 9150-2131 (Momentary)

**Button:** Machined Head  
**LED Color:** None  
**Back Tab:** 2  
 9150-1005 (On/Off)  
 9150-2005 (Momentary)

**Button:** SS w/ Translucent Ring  
**LED Color:** RGB  
**Back Tab:** 3  
 9150-1103 (On/Off)  
 9150-2103 (Momentary)

**Button:** SS w/ Translucent Ring  
**LED Color:** Blue  
**Back Tab:** 3  
 9150-1171

**Buzzer**  
**Style:** Stainless Steel  
**LED Color:** Red  
 9150-7701  
**MOQ:** 25

## Connectors




**Connector**  
**Wires:** None  
 19mm  
 9150-6001  
**MOQ:** 500



**Connector**  
**Wires:** 6"  
 19mm  
 9150-6006  
**MOQ:** 100



**RGB Connector**  
 19mm  
 9150-6306 (6" Wire)  
 9150-6306C (12" Wire)  
**MOQ:** 20

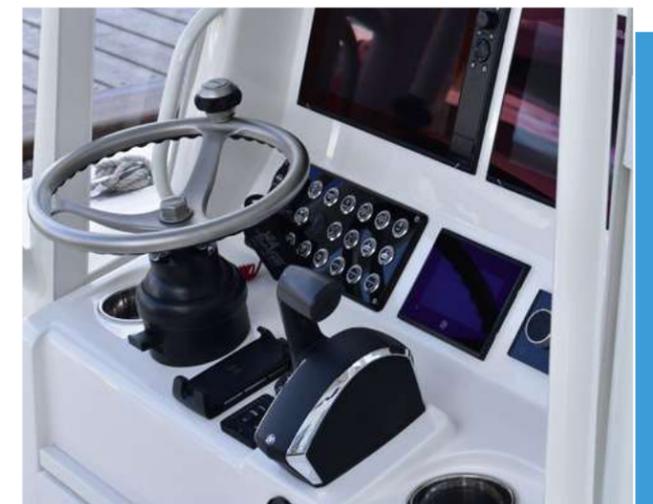

# 22MM SWITCHES

MOQ: 50



**BACK TABS**



**Buzzer**  
LED Color: Red  
Back Tab: 1  
9050-7701

**Switch 3V**  
Button: SS w/ Translucent Center  
LED Color: Blue/Red  
Back Tab: 2  
9051-7002-003 (Momentary)

**Style: Stainless Steel**  
LED Color: Red  
Back Tab: 3  
9151-1001 (On/Off)

**Button: SS w/ Translucent Ring**  
LED Color: Blue  
Back Tab: 5  
9151-9100-0069 (On/Off)

**Anti-Vandal Switch**  
Button: SS w/ Translucent Center  
LED Color: Blue/Red  
Back Tab: 2  
9051-1114 (On/Off)  
9051-2114 (Momentary)

**Switch w/o Jumpers**  
Button: SS w/ Translucent Center  
LED Color: Blue/Red  
Back Tab: 2  
9051-7071 (On/Off)

**Double Lock**  
Button: SS w/ Blue Ring  
LED Color: Blue  
Back Tab: 3  
9151-1010 (On/Off)

**Connector**

**Connector**  
Wires: 12"  
22mm  
9151-6312  
MOQ: 100

**Switch w/ Jumpers**  
Button: SS w/ Translucent Center  
LED Color: Blue/Red  
Back Tab: 2  
9051-7001 (On/Off)  
9051-7002 (Momentary)

**Engine Start/Stop**  
Button: SS w/ Translucent Ring  
LED Color: Green  
Back Tab: 4  
9052-2008


**Switch w/Harness**  
Button: SS w/ Blue Ring  
LED Color: Blue  
Back Tab: 3  
9151-1010-BATT-12 (On/Off)

**Button: SS w/ Translucent Ring**  
LED Color: Red  
Back Tab: 3  
9151-2001

**Switch w/ Jumpers Knurl**  
Button: SS w/ Translucent Center  
LED Color: Blue/Red  
Back Tab: 2  
9051-7001-009 (On/Off)  
9051-7002-009 (Momentary)

**Horn**  
Button: SS w/ Translucent Ring  
LED Color: Red  
Back Tab: 4  
9052-2009 (Momentary)

**Double Lock**  
Button: SS w/ Blue Ring  
LED Color: Blue  
Back Tab: 3  
9151-2010 (Momentary)

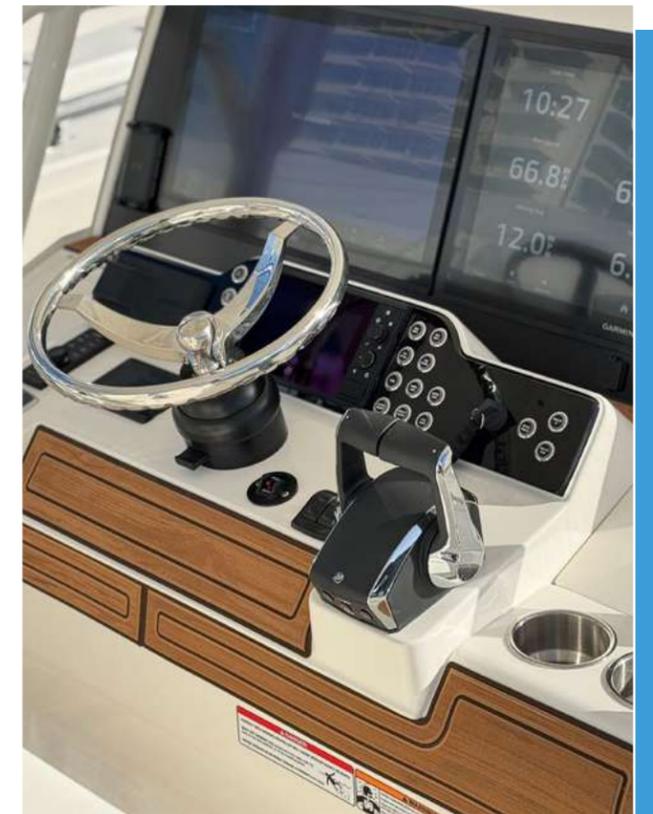

# 19MM PRE-WIRED

MOQ: 50



**Wire Length:** 6"  
**# Of Wires:** 2  
**LED Color:** None  
**Button:** Non-Machined Face  
 9150-1005-106 (On/Off)  
 9150-2005-106 (Momentary)



**Wire Length:** 6"  
**# Of Wires:** 3  
**LED Color:** None  
**Button:** Machined Head  
 9150-1045-036-C (On/Off)  
 9150-2045-036-C (Momentary)



**Wire Length:** 6"  
**# Of Wires:** 3  
**LED Color:** Blue  
**Button:** SS w/ Translucent Ring  
 9150-1100-306-DTF (3 Wire) (On/Off)  
 9150-2100-306-DTF (3 Wire) (Momentary)



**Wire Length:** 6"  
**# Of Wires:** 3  
**LED Color:** Red  
**Button:** SS w/ Translucent Ring  
 9150-1101-306 (On/Off)  
 9150-2101-306 (Momentary)



**Wire Length:** 40"  
**# Of Wires:** 3  
**LED Color:** Blue  
**Button:** SS w/ Translucent Center  
 9150-1013-403 (On/Off)  
 9150-1013-403-1 (w/ Washdown Icon)



**Wire Length:** 6"  
**# Of Wires:** 2  
**LED Color:** None  
**Button:** Machined Head  
 9150-1045-106 (On/Off)  
 9150-2045-106 (Momentary)



**Wire Length:** 6"  
**# Of Wires:** 5  
**LED Color:** Blue  
**Button:** SS w/ Translucent Ring  
 9150-1100-506 (On/Off)  
 9150-2100-506 (Momentary)



**Wire Length:** 6"  
**# Of Wires:** 5  
**LED Color:** Red  
**Button:** SS w/ Translucent Ring  
 9150-1101-506 (On/Off)  
 9150-2101-506 (Momentary)



**Wire Length:** 6"  
**# Of Wires:** 3  
**LED Color:** Blue  
**Button:** Black w/ Blue Ring  
 9150-1030A-306 (On/Off)



**Wire Length:** 6"  
**# Of Wires:** 3  
**LED Color:** Blue  
**Button:** SS w/ Translucent Ring  
 9150-1100-306 (On/Off)  
 9150-2100-306 (Momentary)



**Wire Length:** 6"  
**# Of Wires:** 5  
**LED Color:** Blue  
**Button:** SS w/ Translucent Ring  
 9150-1100-506-0069 (On/Off)



**Wire Length:** 6"  
**# Of Wires:** 3  
**LED Color:** RGB  
**Button:** SS w/ Translucent Center  
 9150-1102-306 (On/Off)

# 19MM PRE-WIRED CONT.

MOQ: 50



**Wire Length:** 6"  
**# Of Wires:** 5  
**LED Color:** Green  
**Button:** SS w/ Translucent Ring  
9150-1102-506 (On/Off)



**Wire Length:** 38"  
**# Of Wires:** 1  
**LED Color:** Blue  
**Button:** SS w/ Translucent Ring  
9150-2130-301-SS (Momentary)



**Wire Length:** 5'  
**# Of Wires:** 3  
**LED Color:** Blue  
**Button:** SS w/ Translucent Ring  
9050-1014 (On/Off)



**Wire Length:** 6"  
**# Of Wires:** 4  
**LED Color:** Red  
**Button:** SS w/ Translucent Ring  
9052-2009-106  
9052-2009-106-4 (W/DTM06-4S)



**Wire Length:** 6"  
**# Of Wires:** 5 (DTF)  
**LED Color:** Red  
**Button:** SS w/ Translucent Ring  
9150-2101-506-DTF (Momentary)



**Wire Length:** 6"  
**# Of Wires:** 1  
**LED Color:** Red  
**Button:** SS w/ Translucent Ring  
9150-2131-301 (Momentary)



**Wire Length:** 6"  
**# Of Wires:** 4  
**LED Color:** Red  
**Button:** SS w/ Translucent Ring  
9051-1214 (On/Off)  
9051-2214 (Momentary)



**Wire Length:** 38"  
**# Of Wires:** 1  
**LED Color:** Blue  
**Button:** Black w/ Blue Ring  
9150-2130-301 (Momentary)



**Wire Length:** 6"  
**# Of Wires:** 4  
**LED Color:** Green  
**Button:** SS w/ Translucent Ring  
9052-2008-106-4  
9052-2009-106-4 (W/DTM06-4S)

# 22MM PRE-WIRED

MOQ: 50


## Accessories



**LED Wire**  
**Wire Length:** 7.5"  
**# Of Wires:** 2  
**LED Color:** Red  
1812-1-20-20310

# ELECTRONIC SWITCHES

At **Bluewater Enterprises**, we specialize in high quality marine grade electrical solutions designed for reliability in the toughest conditions. Our **22mm** and **19mm Electronic Switches** are a testament to our commitment to **durability, safety, and performance**. With **IP69K** waterproofing, **stainless steel SS316** construction, and **inrush protection** up to 120A, our switches ensure smooth uninterrupted operation for marine and industrial applications. Built to withstand shock, salt spray, and harsh environments, Bluewater products deliver the dependability you need **when it matters most**.

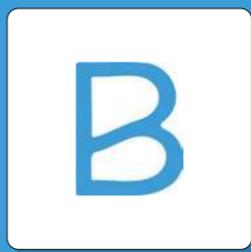

**MOQ** for all 22mm switches is set at **20**.

## THINGS TO KNOW


- Programmable Functions:**  
 Configure a single switch for dimming, multi position control, or timed functions, offering flexibility and space savings.
- Integrated Feedback:**  
 Built in LED indicators provide instant visual confirmation of system status, improving safety and ease of use.
- Custom Actuators:**  
 Switches can be fitted with black, stainless steel, or translucent actuators and labeled to suit specific functions. See page 54 for available options and details.
- Low Profile Design:**  
 With minimal moving parts, electronic switches offer compact, modern styling and increased resistance to wear and corrosion.

## SWITCH INDEX

- 9059 Series (22mm)** - Pg. 46 - 49  
 2n1 Inrush Switch - Pg 46 - 47  
 22mm Inrush Switch - Pg 48 - 49
- 9060 Series (22 mm)** – Pg. 50 - 51  
 Programmable Inrush Switch
- 9057 Series (19mm)** – Pg. 52 - 53  
 19mm Electronic Switch
- Actuators / Harnesses** – Pg. 54 - 57




## SWITCH GUIDE

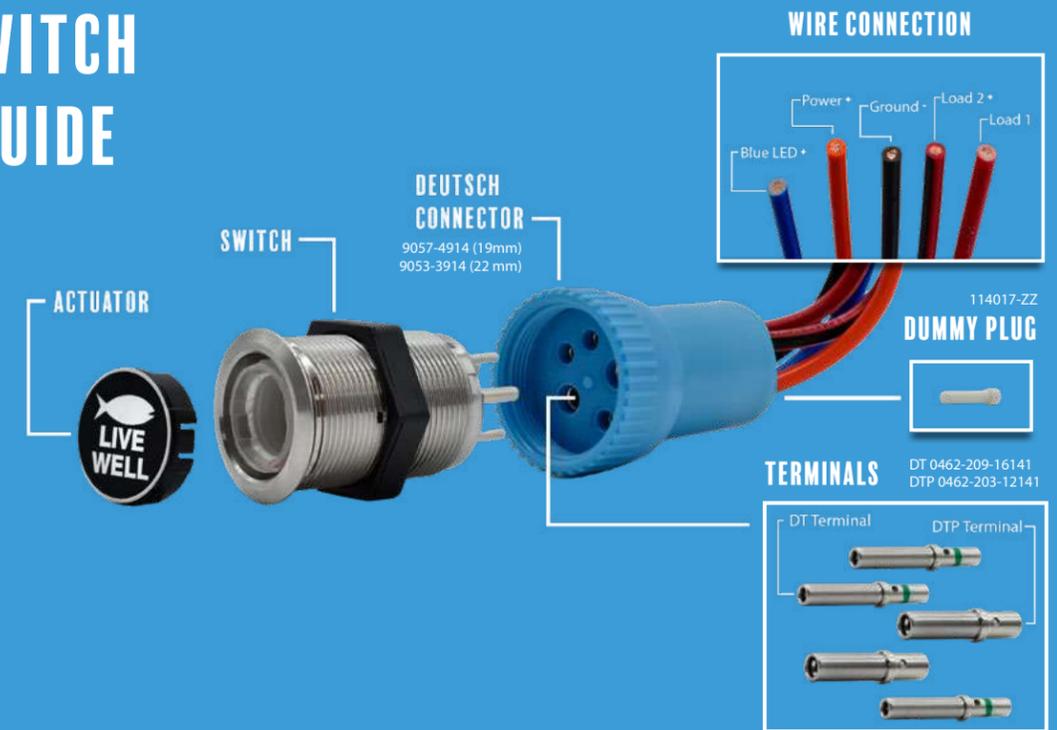

# 2N1 INRUSH SWITCH

Upgrade your marine setup with the **2N1 Inrush Switch** built to handle demanding electrical loads with seamless control. Featuring **dual pushbuttons** for two outputs or up down functions, this rugged switch boasts **IP69K** waterproofing stainless steel construction and 120A inrush protection for ultimate **reliability**. Designed to withstand salt spray extreme shocks and harsh marine conditions it delivers precision strength and safety because on the water **every connection counts**. Whether you're powering critical systems or fine-tuning performance, the 2N1 ensures **you're always in command**.

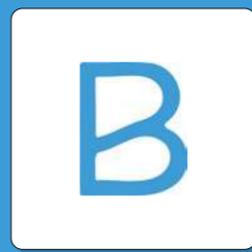

**MOQ** for all 22mm switches is set at **20**.

## 9059 Series

### FEATURES


- Powerful Performance:**  
 2 x 10A per channel, 20A max.
- Dual Control:**  
 Two pushbuttons for dual outputs or up/down control
- Marine-Grade Toughness:**  
 SS316 stainless steel body, IP69K waterproof
- Built for the Elements:**  
 Salt spray tested (EN ISO 9227-17)
- Shockproof:**  
 Withstands 20g bump shocks
- Fire-Resistant:**  
 UL 94 V2 flammability rating, heat-rated to 105°C

### QUICK GUIDE

N/O: Normally Open N/C: Normally Close 2 Output Function	Parts No.	Power On	Press & Hold	Press	Press & Hold 2 buttons
1. N/O (ON) 2. N/O (ON)	9059-7002				
1. N/C (OFF) 2. N/C (OFF)	9059-7004				
1. N/C (ON) 2. N/O (OFF)	9059-7006				
1. N/O - On/Off 2. N/O - On/Off	9059-7009				
1. N/O - On/Off 2. N/C (OFF)	9059-7012				
1. N/O - On/Off 2. N/C (OFF)	9059-7013				
1. N/O - On/Off 2. N/O - On/Off NAV/ANC	9059-7014				
1. N/C - Dim Up 50% --> 100% 2. N/C - Dim Dn 50% --> 5%  DIMMER PWM	9059-7015				

# 22MM INRUSH SWITCH

Upgrade your boat's electrical system with the **22mm Inrush Protection Switch** - built tough for marine conditions and engineered for seamless operation. Featuring **ultra-bright LED indicators, a waterproof stainless steel body, and high-load surge protection up to 120A**, this switch keeps your systems running safely and efficiently. Whether you need reliability for critical functions or a sleek, professional look, Bluewater's switch delivers both. They are easy to install, impact-resistant, and designed to last, because when you're on the water, **only the best will do.**

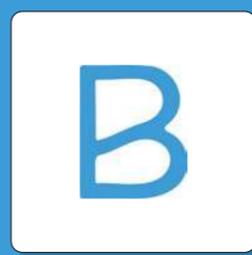

MOQ for all 22mm switches is set at **20**.

## 9059 Series

### FEATURES

- Power Capacity:**  
 20A max (1 channel) | 10A max per channel (2 channels)
- Night Visibility:**  
 Blue LED back light for clarity; turns red when active
- Built to Last:**  
 SS316 stainless steel body, IP69K waterproof rating
- Extreme Durability:**  
 Salt spray (EN ISO 9227-17) & 20g shock tested
- Heat & Safety:**  
 UL 94 V2 flammability-rated, withstands up to 105°C

### QUICK GUIDE


Function	Parts No.	Off	1st On	2nd On	3rd On	Rear Mark Page
Off-On	9059-1113	(Blue)	Red	X	X	Red Dot
Off- (On)	9059-2113	(Blue)	Red	X	X	Green Dot
NAV/ANC	9059-3114	(Blue)	Green	Red	X	White Dot
Off-On-On	9059-3113	(Blue)	Green	Red	X	Blue Dot
Off-On-On-Both	9059-3115	(Blue)	Green	Red	Yellow	Yellow Dot
Off-(On)-(On)	9059-2123	(Blue)	Green	Red	X	Green Dot
Off-(On)	9059-2213	(Red)	Red	X	X	Green Dot
Auto NAV Photo Sensor	9059-3734	(Blue)	Green	Red	Yellow	White Dot
Timer ON (1 min G) OFF (2min Y)	9059-1555	(Blue)	Red	Green	Yellow	Red Dot
Timer ON (2 min RED) --> OFF	9059-1555F	(Blue)	Red	X	X	Red Dot
Dimmer	9059-3116	(Blue)	Red	X	X	Green Dot
3-way Switch	9059-5113	(Blue)	Red	X	X	Red Dot
Off-(On) Ground	9059-2713	(Blue)	Red	Purple		Purple Dot
Off-On Ground	9059-1713	(Blue)	Red	Purple		Purple Dot
Off-(On) Signal	9059-2118	(Blue)	Red	Purple		Green Dot
On-(Off)	9059-2913	Red	(Blue)	X	X	Green Dot

## 22MM PROGRAMMABLE SWITCH

Upgrade your marine electrical system with the **22mm Programmable Switch**, offering 8 adjustable amp settings and easy press-and-hold setup. Built with SS316 stainless steel, **IP69K** waterproofing, and **inrush protection** up to 120A, it's made for harsh marine conditions. A Red LED indicator provides instant feedback when the pump is running. Its **compact design** fits tight panels without compromising performance, giving you smart control in any environment.



- Flexible Power Options:**  
 20A max (1 channel) or 10A per channel (2 channels)
- Customizable Protection:**  
 8 programmable amp settings including 3, 5, 6, 7.5, 10, 15, 20, and 0
- Easy Setup:**  
 Adjust breaker current with a simple press-and-hold
- Inrush Protection:**  
 Handles 120A surges for 120µs before fault mode
- Marine-Grade Durability:**  
 SS316 stainless steel, IP69K waterproof, salt spray & shock tested

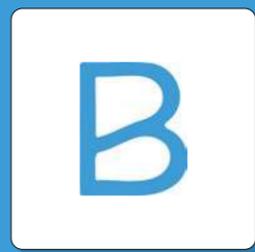

MOQ for all 22mm switches is set at **20**.

## QUICK GUIDE

Function	Parts No.	Off	1st On	2nd On	3rd On	Rear Mark Page
Off - On	9060 - 1113	(Blue)	Red	X	X	Red Dot
Off - (On)	9060 - 2113	(Blue)	Red	X	X	Green Dot
NAV/ANC	9060 - 3114	(Blue)	Green	Red	X	White Dot
Off - On - On	9060 - 3113	(Blue)	Green	Red	X	Blue Dot
Off - On - On - Both	9060 - 3115	(Blue)	Green	Red	Yellow	Yellow Dot
Off - (On) - (On)	9060 - 2123	(Blue)	Green	Red	X	Green Dot

## 19MM ELECTRONIC SWITCH

Upgrade your boat's electrical system with the **19mm Marine-Grade Switch**, built for durability and precision. It features smart **LED indicators**, glowing blue for back lighting and red when active for clear visibility. Designed for 15A single-channel or 7.5A dual-channel use, it's housed in SS316 stainless steel with an **IP69K** waterproof rating, ensuring **reliability in harsh marine conditions**.



### FEATURES

- Power & Performance:**  
 15A max (1 channel) or 7.5A per channel (2 channels)
- Smart LED Indicators:**  
 Blue back light at night, red LED when function is active
- Marine-Grade Durability:** SS316 stainless steel body with IP69K waterproofing
- Built for Harsh Conditions:**  
 Salt spray resistant and 20g shock-tested
- High Safety Standards:**  
 UL 94 V2 flammability rated, heat-resistant to 105°C

**B**

MOQ for all 19mm switches is set at **32**.

### QUICK GUIDE

Function	Parts No.	Off	1st On	2nd On	Rear Mark Page
Off - On	9057 - 1113	(Blue)	Red	X	Red Dot
	9057 - 1123	(Green)	Blue	X	
Off - (On)	9057 - 2113	(Blue)	Red	X	Green Dot
	9057 - 2133	(Green)	Blue	X	
Off - (On) - (On)	9057 - 2123	(Blue)	Green	Red	Green Dot with a line
	9057 - 2223	(Green)	Blue	Red	
Off - On - On	9057 - 3113	(Blue)	Green	Red	Blue Dot
	9057 - 3123	(Green)	Blue	Red	
NAV/ANC	9057 - 3114	(Blue)	Green	Red	White Dot
Dimmer	9057 - 3116	(Blue)	Red	X	Black Dot

# CUSTOMIZABLE ACTUATORS

All actuators come in **laser-engraved** or **UV-printed** designs for lasting durability. Choose laser engraving for a sleek, fade-resistant finish or UV printing for bold, high-contrast visibility—both **built to withstand tough marine conditions.**

## Replaceable Actuators Available

Style	Parts No.
Full Translucent	9451-1001
Stainless Steel Ring	9451-1002
Laser Logo (Black)	9451-1005



For **19mm** actuators, use product number **9551** before your selected actuator code; add **UV** at the end for UV printing (E.g., **9551-0074UV**)

For **22mm** actuators, use product number **9451** before your selected actuator code; add **UV** at the end for UV printing (E.g., **9451-0074UV**)



# SWITCH HARNESS

**Great For:** Flexible layouts with dual or single output options, ready for any boat.

- 
- 
- 
- 

Switch Harness parts do not have an **MOQ**.

## Deutsch Switch Harness

Available for both **19mm** and **22mm** switches, our harnesses are built for flexibility and durability in marine environments. Choose the 4 wire option for a **single output**, with a dummy plug included to seal the unused port, or the 5 wire version for **dual outputs**.

**We cut to any wire length. Just contact us with what you need.**

22mm Harness: 9533914 - #xx  
19mm Harness: 9574914 - #xx

# = number of outputs (1 or 2)  
xx = length in inches (1ft increments)

**Example Order:** 9533914-136  
\*19mm Harness, 1 Output, 3ft



**4 Wire / 1 Output Switch Harness**



**5 Wire / 2 Output Switch Harness**

## Y-Wire Harness

Our **Y-Wire** harness splits power or signal between two outputs. Built with marine grade materials, it offers a clean and **secure connection in tight spaces**.




**Orange Y Wire 12AWG**




**Blue Y Wire 18AWG**



**Black Y Wire 18AWG**

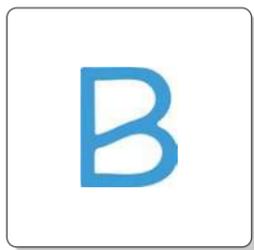



# CONNECTORS & INTERFACES

## Reliable connections. Enduring performance.

Reliable connectivity is at the heart of every marine system. From **Deutsch Connectors** to **NMEA 2000 Cables** and waterproof **Receptacles**, our interface solutions are designed for secure signal and power transmission in the harshest conditions. Resistant to corrosion, vibration, and moisture, these components ensure that your systems communicate clearly and perform consistently. Whether you are integrating electronics or maintaining vital connections, this is where dependable performance begins.


Product Category	Page #
Deutsch Connectors	62-65
Receptacles	66-71



# DEUTSCH CONNECTORS

Bluewater Enterprises supplies rugged **Deutsch Connectors** for demanding marine environments. Available in **DT, DTM, DTP,** and **DTHD** series in both male and female configurations, these connectors resist moisture, vibration, and corrosion while paired with quality **Terminals** to ensure secure, lasting connections.

**Great For:** Creating secure, weather-resistant connections for critical wiring in marine and harsh environment applications.

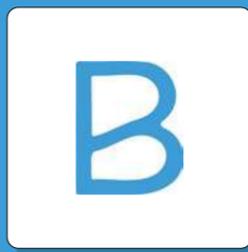

Deutsch  
Connectors  
**MOQ: 100**

## DT CONNECTORS W/ WEDGE LOCK

### • 2 Position



### • 4 Position




### • 8 Position



### • 3 Position



### • 6 Position

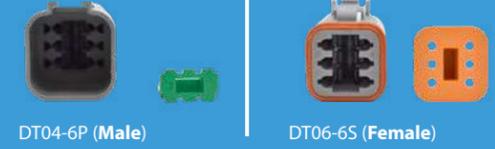

### • 12 Position



## DTM CONNECTORS W/ WEDGE LOCK

### • 2 Position




### • 4 Position



### • 3 Position



### • 6 Position

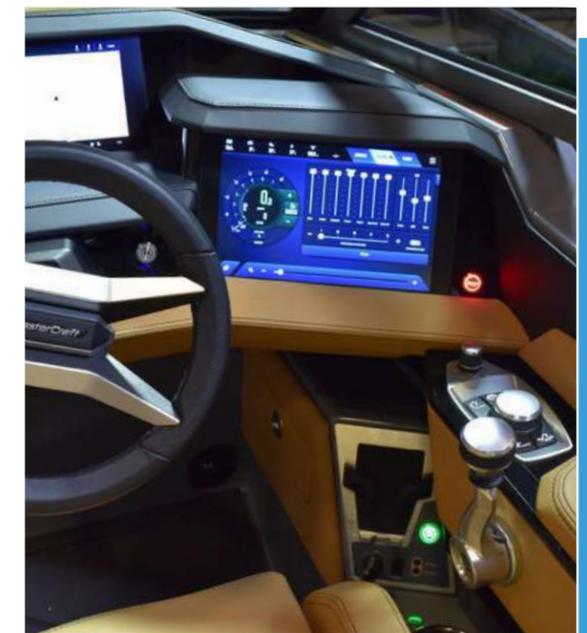

# CONNECTORS CONT.

B

# TERMINALS

## DTP CONNECTORS

W/ WEDGE LOCK

### • 2 Position



DTP04-2P (Male)



DTP06-2S (Female)



### • 4 Position



DTP04-4P (Male)



DTP06-4S (Female)



## DTB CONNECTORS

W/ WEDGE LOCK

### • 20 Position Male



DTB04-20P



• 4 DTP / 16 DT

### • 20 Position Female



DTB06-20S



• 4 DTP / 16 DT

## SINGLE POSITION CONNECTORS

### • 4-6 AWG



DTHD04-1-4P (Male)



DTHD06-1-4S (Female)

### • 8 AWG



DTHD04-1-8P (Male)



DTHD06-1-8S (Female)

### MALE TERMINALS



**DTM 18-20AWG**  
0460-202-20141  
MOQ: 100



**DTP 12-14AWG**  
0460-204-12141  
MOQ: 100



**Deutsch 8AWG Pin**  
0460-204-08141  
MOQ: 100



**Deutsch 4AWG Pin**  
0460-204-04141  
MOQ: 100



**DTP Crimp**  
1060-12-0166  
MOQ: 1 Roll (2500)



**Stamped DTP Crimp**  
1060-12-0222  
MOQ: 1 Roll (2500)



**DT Crimp**  
1060-14-0122  
MOQ: 1 Roll (4000)



**Solid 14AWG**  
0460-215-16141  
MOQ: 100

### FEMALE TERMINALS



**DTM 18-20AWG**  
0462-201-20141  
MOQ: 100



**DTP 12-10AWG**  
0462-203-12141  
MOQ: 100



**Deutsch 8AWG Pin**  
0462-203-08141  
MOQ: 100



**Deutsch 4AWG Pin**  
0462-203-04141  
MOQ: 100



**DTM Machined 16AWG**  
0462-005-20141  
MOQ: 100



**DT Machined 14-16AWG**  
0462-209-16141  
MOQ: 100



**DTP Crimp**  
1062-12-0166  
MOQ: 1 Roll (2500)



**Stamped DTP Crimp**  
1062-12-0222  
MOQ: 1 Roll (2500)




**DT Crimp**  
1062-14-0122  
MOQ: 1 Roll (4000)

# RECEPTACLE OPTIONS

Our **receptacle** offerings provide reliable power solutions for any marine setup. We offer **USB Chargers, 12V Power Ports, and Combination Units** designed for durability and convenience, keeping your devices powered on the go. Whether you need fast charging or versatile connectivity, we have the right solution for you.

**Great For:** Supplying weather resistant charging and power access for USB and 12 V devices, ensuring reliable connectivity in any marine environment.

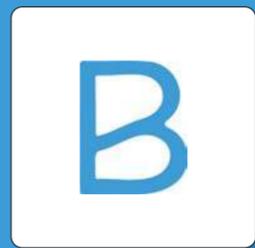

Receptacles  
**MOQ** specified  
in product  
details.



## CONTURA DUAL USB CHARGER

- **Current Rating:** 4.8A (32VDC)
- No LED
- IP66 Protection
- **MOQ:** 50



## ROUND DUAL USB

- **Current Rating:** 4.8A (32VDC)
- **LED color:** Blue
- IP66 Protection
- **MOQ:** 50



## DUAL USB W/ RED VOLT METER

- **Current Rating:** 4.2A (4VDC)
- **Colors:** Red
- IP66 Protection
- 3.0A available in Aluminum
- **MOQ:** 50



## CONTURA DUAL USB CHARGER W/ RED VOLT METER

- **Current Rating:** 4.8A (32VDC)
- **LED color:** Red
- IP66 Protection
- **MOQ:** 50



## ROUND DUAL USB TIGHT CAP

- **Current Rating:** 4.8A (32VDC)
- No LED
- IP66 Protection
- **MOQ:** 50



## DUAL USB UN-LIT

- **Current Rating:** 4.8A (32VDC)
- No LED
- IP66 Protection
- **MOQ:** 50



## USB/USB-C & 12V COMBO

- **Current Rating:** 4.8A (32VDC)
- No LED
- IP66 Protection
- **MOQ:** N/A



## ROUND DUAL USB/USB-C

- **Current Rating:** 4.8A (32VDC)
- **USB-C:** 45W Fast Charger (4.0)
- No LED
- IP66 Protection
- **MOQ:** 100



## 100 WATT CHARGER USB/USB-C

- No LED
- IP66 Protection
- **MOQ:** 25

3000-1001  
3000-3011 (**3.1A**)

3000-1032

3000-1212  
3000-1213 (**AL**)

3000-2021

3000-1002

3000-1132

3000-4011

3000-4001A  
3000-4055  
(w/ **green volt meter**)

3000-4011



## Mounts w/ Cables

Our USB and data ports keep you connected with **fast charging** and **seamless media integration** on the water. From **USB** and **HDMI** options to panel-mount data ports, our lineup ensures reliable power and connectivity.



## Deutsch Connections

Our Deutsch-style receptacle connectors provide **secure, waterproof connections** for reliable power in marine and automotive environments. Designed for durability, they prevent corrosion and ensure a tight fit for **USB/USB-C chargers** and **12V ports**.



3000-2232

### USB PANEL MOUNT W/ CABLE

- **Voltage Output:** 30V
- **Wire Size:** 24 AWG
- **Wire Length:** 3.2 Meter
- **MOQ:** N/A



3000-1035

### USB/3.5MM WITH CABLE & BRACKET

- **Voltage Output:** 30V
- **Wire Size:** 24 AWG
- **Wire Length:** 3.5 Meter
- **MOQ:** N/A



3000-4400

### USB/HDMI MOUNT W/ CABLE

- High Speed HDMI Cable
- 30V output USB cable
- **Wire Size:** 24 AWG
- **Wire Length:** 2 Meter
- **MOQ:** N/A



6000-3004

### 12V W/ SINGLE PLATE

- IP65 Protection
- **Wire Size:** 16 AWG
- **Max Amperage:** 15A
- **MOQ:** 100



6000-3005

### USB/C WITH SINGLE PLATE

- IP65 Protection
- **Wire Size:** 16 AWG
- **Peak Voltage:** 36 V DC
- 2 Port with Intelligent Device Detection
- **MOQ:** 40



6000-3205

### USB/C & 12V COMBO WITH DOUBLE PLATE

- IP65 Protection
- **Wire Size:** 16 AWG
- **MOQ:** 50



3000-4022

### FUSED USB/C & 12V COMBO WITH DOUBLE PLATE

- IP65 Protection
- **Wire Size:** 16 AWG
- **MOQ:** 50



## 12 Volt Accessories

Our 12V voltmeter and receptacle provide **essential power** and **monitoring** for marine and automotive systems. The voltmeter offers **real-time battery status**, while the 12V receptacle delivers **reliable power** for accessories.



## Plates and Covers

Our plates and covers provide a **clean, secure finish** for your switches, receptacles, and accessories. Designed for durability, they offer **protection against dust, water, and accidental damage** while ensuring a sleek look.



BW-VM-10001

### BLUE 12V DC VOLT METER

- **Input:** 12 V DC / 24V DC
- **Range:** 6 - 15 V DC
- **Colors:** Red/Blue/Green/Orange
- **MOQ:** 50



BW-VM-10001-1T

### BLUE 12V DC VOLT METER THRUSTER

- **Input:** 12 V DC / 24V DC
- **Range:** 6 - 15 V DC
- **Colors:** Red/Blue/Green/Orange
- **MOQ:** 50



6001-0001

### 12V RECEPTACLE

- **Max Amperage:** 15A
- **Max Voltage:** 12V DC
- **MOQ:** 50



3000-6011

### SINGLE DOUBLE D PLATE

- **Mounting Holes:** 0.17"
- **Distance Between Holes:** 1.9"W
- **MOQ:** 100



3000-6021

### DUAL DOUBLE D PLATE



- **Mounting Holes:** 0.17"
- **Distance Between Holes:** 3.5"W x 1"H
- **MOQ:** 100



3000-1005 (Black)  
3000-1006 (White)

### DOUBLE D SPRING COVER

- Easy upgrade for any USB, 12V, or Double D device
- Durable 316 stainless steel spring
- Includes two rubber gaskets
- **MOQ:** N/A

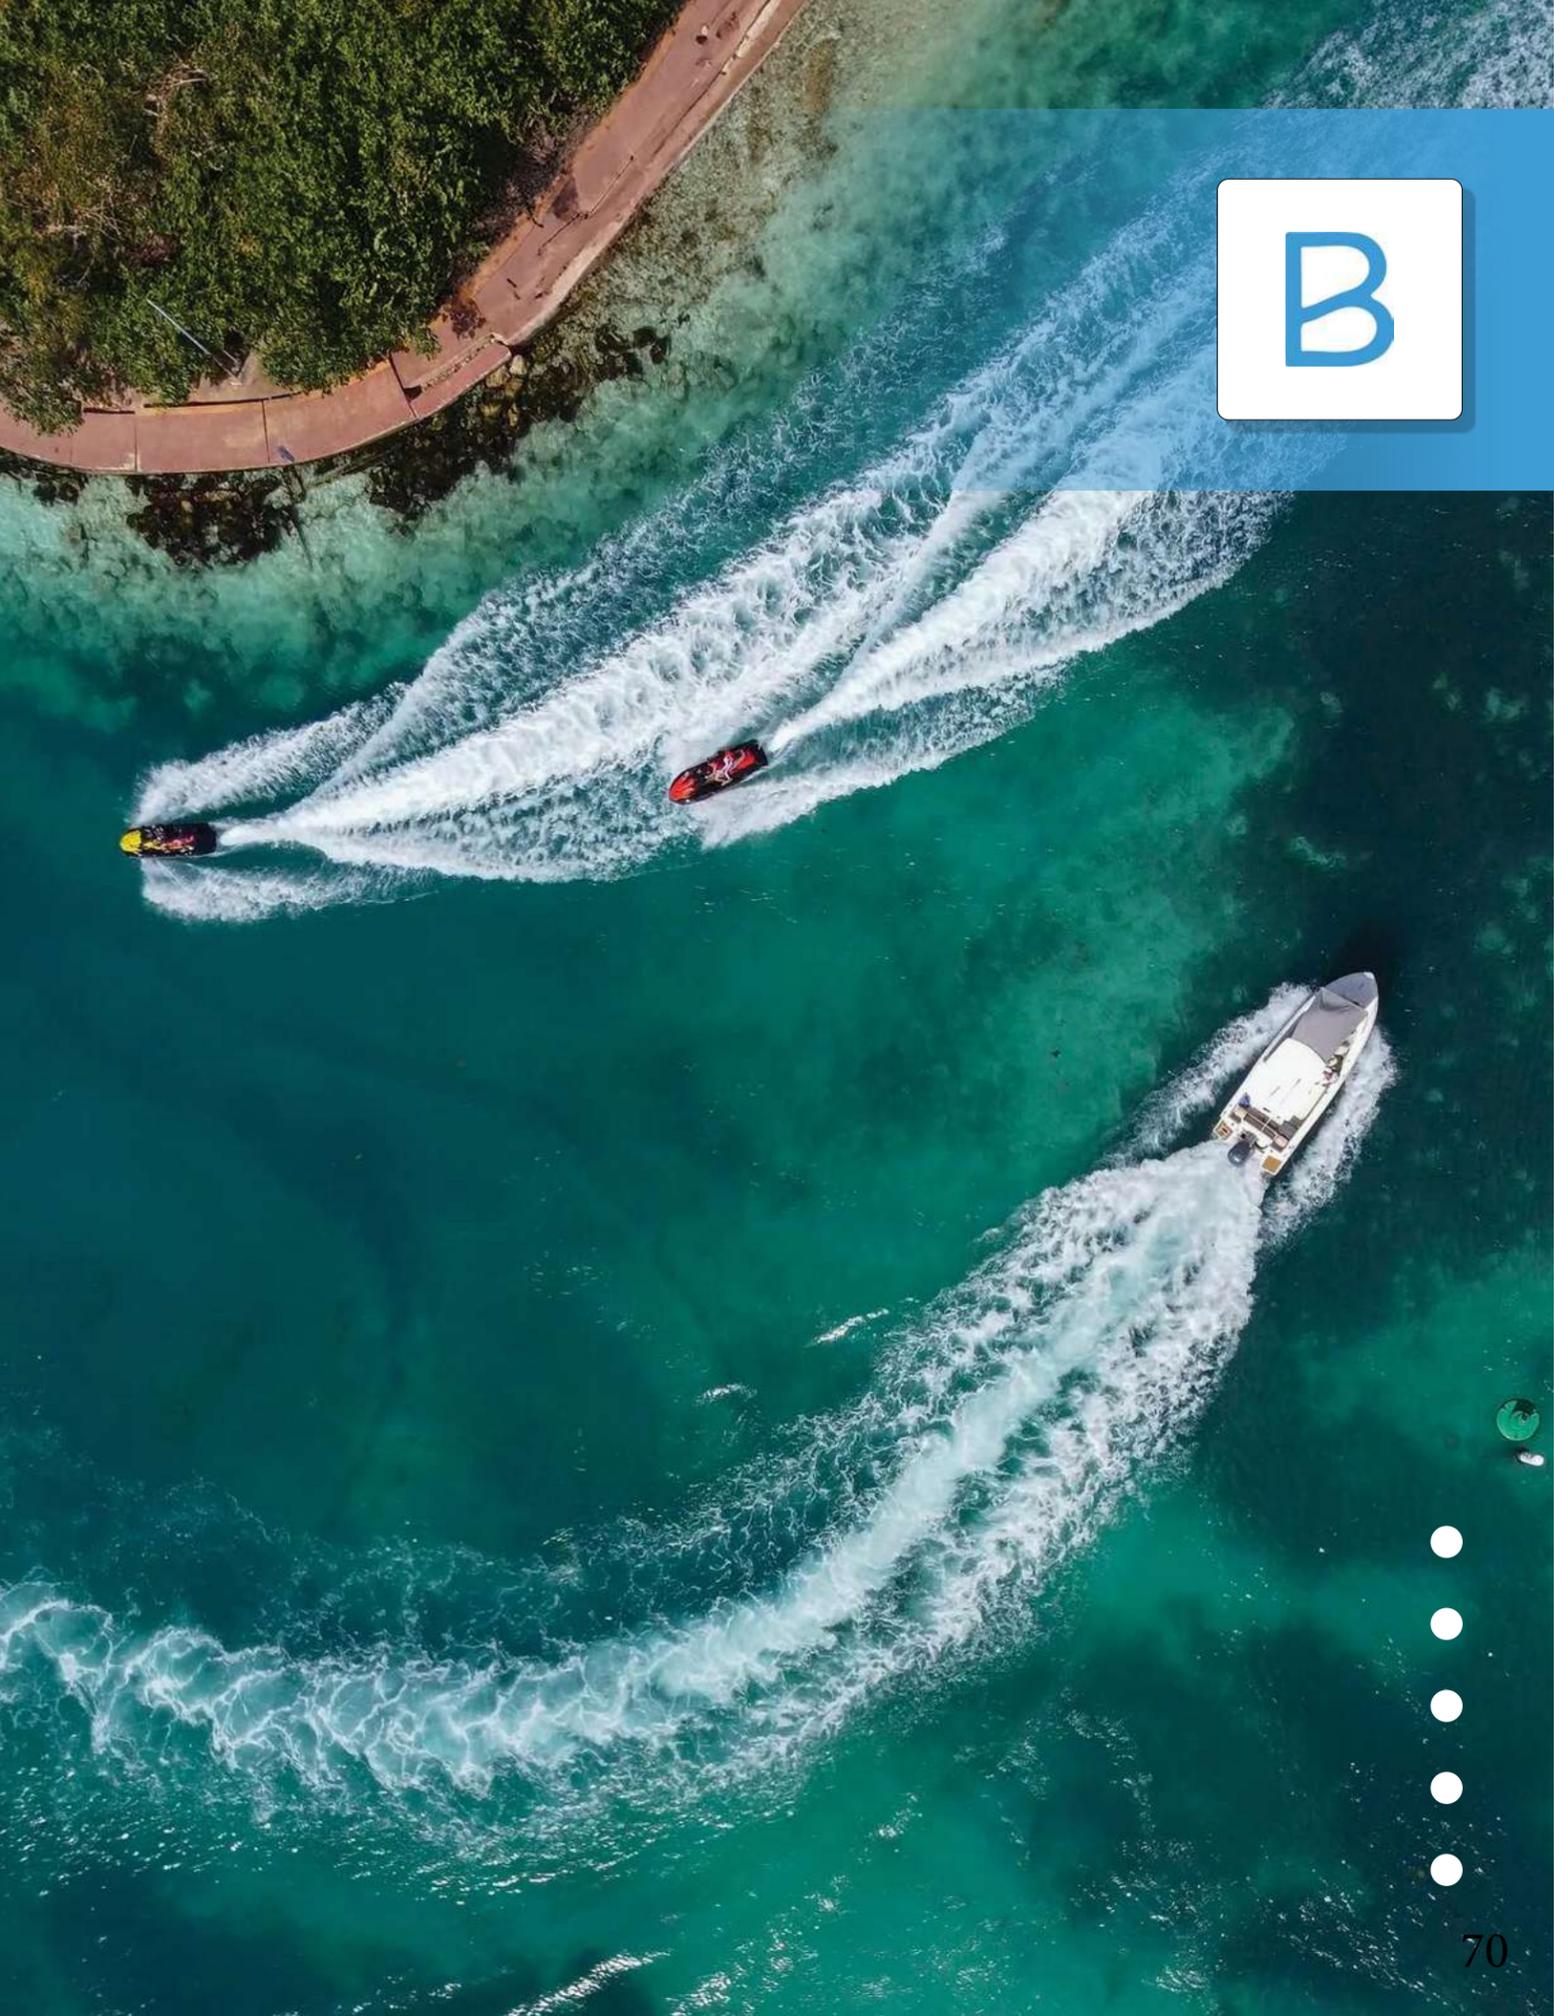

# MARINE DATA & NETWORKING

## Data you can trust. Connections that endure.

Reliable data is the backbone of every vessel. Our **NMEA 2000 cables** deliver fast, plug and play connectivity between instruments and networks. Designed for life at sea such as exposure to moisture, vibration, and corrosion, each cable **maintains signal integrity** when it matters most. Available in a range of lengths and terminations, these cables **simplify installation** and adapt to any system layout. Backed by rigorous testing and quality assurance, they help ensure your navigation and monitoring systems stay online. Whether linking chart plotters, sensors, or displays, this is where **seamless communication** begins.




Product Category	Page #
NMEA 2000	74-79



# NMEA 2000 CABLES

Bluewater Enterprises offers **NMEA 2000 cables** in various lengths with **tee connectors** and **terminators**, all built to withstand harsh marine environments. Made from corrosion resistant materials with superior shielding, these cables ensure secure waterproof connections and **dependable data transmission**.

**Great For:** Reliable, plug-and-play connectivity for seamless marine electronics integration.



NMEA 2000 parts do not have an **MOQ**.



## NMEA 2000 5 PIN DROP CABLE

Part #	2700-55-011	0.5 Meter
Part #	2700-01-011	1 Meter
Part #	2700-02-011	2 Meter
Part #	2700-03-011	3 Meter
Part #	2700-04-011	4 Meter
Part #	2700-05-011	5 Meter
Part #	2700-06-011	6 Meter
Part #	2700-10-011	10 Meter



## NMEA 2000 FEMALE STRIP CABLE

Part #	2700-.05-010	0.5 Meter
--------	--------------	-----------



## NMEA 2000 RIGHT ANGLE CABLE

Part #	2700-21-011	2 Meter
		Female/Angle
		Male/Straight



## NMEA 2000 POWER NO FUSE

Part #	2703-11-001	No Fuse 1 Meter
Part #	2703-11-002	No Fuse 2 Meter

# NMEA 2000 CONNECTORS

B



2702-12-012



2702-13-013




2702-14-014



2702-15-015

## NMEA 2000 TEE CONNECTORS

- Part # 2702-12-012 1 Way Tee Connector
- Part # 2702-13-013 2 Way Tee Connector
- Part # 2702-14-014 3 Way Tee Connector
- Part # 2702-15-015 4 Way Tee Connector

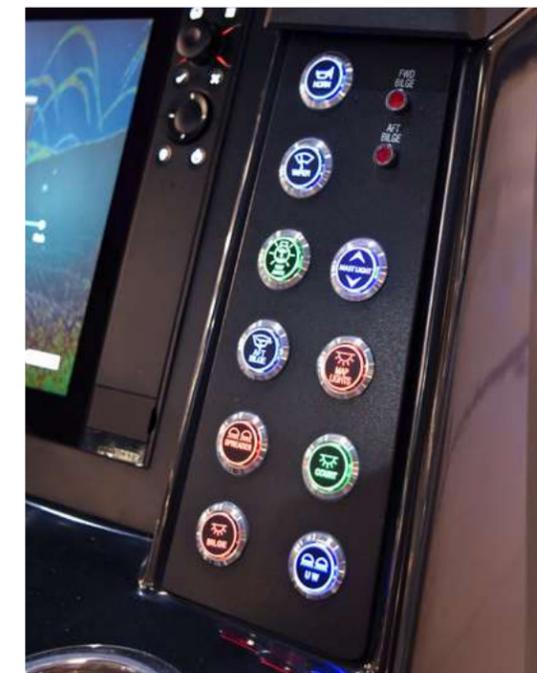

## NMEA 2000 POWER ISOLATOR

- Part # 2706-00-000 Power Isolator Female to Male



2705-00-001



2705-00-010

## NMEA 2000 TERMINATORS


- Part # 2705-00-001 Male Terminator
- Part # 2705-00-010 Female Terminator



## NMEA 2000 RIGHT ANGLE ADAPTER

- Part # 2704-12-011 Right Angle Adapter Female to Male

B



# MOUNTING & PROTECTION

## Built to shield. Made to last.

Every connection needs protection, and our Mounting and Protection products are designed to do just that. From **Rubber Boots** and **Sealing Grommets** to **Panel Mount Studs**, these components keep your electrical systems secure from moisture, vibration, and physical damage. Made from **high quality marine grade materials**, they help extend the life of your installations and maintain **dependable performance** in the toughest conditions. Whether sealing switches, supporting cables, or providing solid mounting points, this is where **durability begins.**


Product Category	Page #
Mounting & Rubber Parts	82-83



# MOUNTING & RUBBER PARTS

Bluewater Enterprises offers durable components to protect, secure, and extend the life of your marine electronics. Our rubber **Screw-on Caps**, **Grommets**, and **Boots** seal out moisture, dirt, and debris while maintaining connection integrity and preventing corrosion, and our **Panel Mount Studs** provide strong, reliable mounting points for power distribution in harsh environments.

**Great For:** Sealing cable entries, protecting open ports, and creating strong, reliable mounting points for electrical connections.

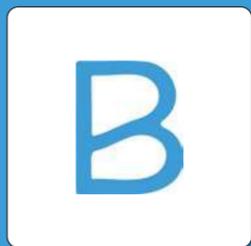

Rubber Parts  
**MOQ** specified  
in product  
details.

## SCREW ON CAPS



1300400-0092  
Black  
MOQ: 100



1300402-0092  
White  
MOQ: 100



1300411-0092  
Clear  
MOQ: 100




1300600-0092  
Black Toggle  
MOQ: 100



13300402-0092  
White Toggle  
MOQ: 100



1300700-0092  
Hex Seal Half Boot  
MOQ: 100

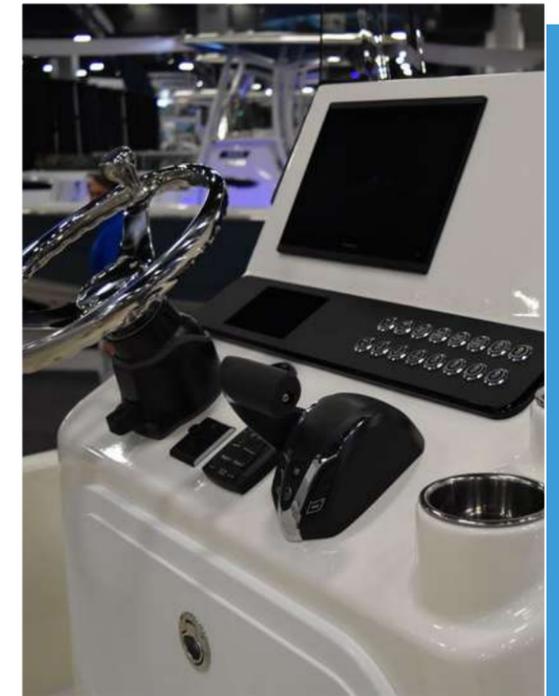

## BOOTS



1655-001-000  
Battery Boot Red  
MOQ: 100



Battery Boot Black  
MOQ: 100

## GROMMETS



1301526-0092  
Utility Grommet 2.6"  
MOQ: 100



1301534-0092  
Utility Grommet 3.4"  
MOQ: 100



1300801-0092  
1/4 PVC Grommet  
MOQ: 100



1300800-0092  
1/8 PVC Grommet  
MOQ: 100

## PANEL MOUNT STUDS



Stainless Steel  
8-32  
Packs of 100

1900-0832-100 (1")

1900-0832-125 (1.25")

1900-0832-150 (1.5")

# BLUΞWATERΞR

ENTERPRISES

## About Bluewater Enterprises

At Bluewater Enterprises, we're committed to delivering quality marine electronics at a price you can trust. Whether you're upgrading your vessel's systems or building from scratch, our range of switches, busbars, couplers, and cables are engineered to perform in the toughest marine environments.

## Stay Connected

Explore our full product range, get installation tips, and stay current with new releases.

**Website:** [www.bluewatergadgets.com](http://www.bluewatergadgets.com)

**Email:** [sales@bluewatergadgets.com](mailto:sales@bluewatergadgets.com)

**Phone:** (855)-BLUE700

**Address:** 13620 49th St N Clearwater, FL 33762

Follow Us for Updates and Promotions at

**Facebook & LinkedIn:** @bluewaterenterprises

**Instagram:** @bluewater\_gadgets

\*Bluewater Enterprises reserves the right to change product specifications or discontinue items without prior notice. Product details are provided as a guide and may vary from actual items.



Scan our QR code to view our full product range online, or visit [www.bluewatergadgets.com](http://www.bluewatergadgets.com)