

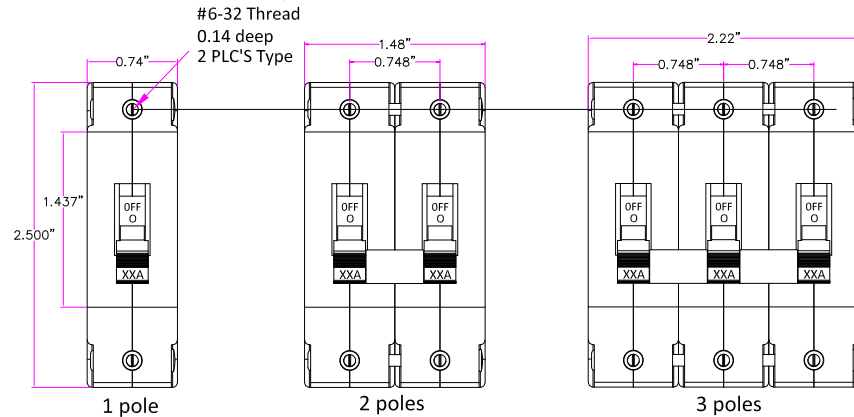


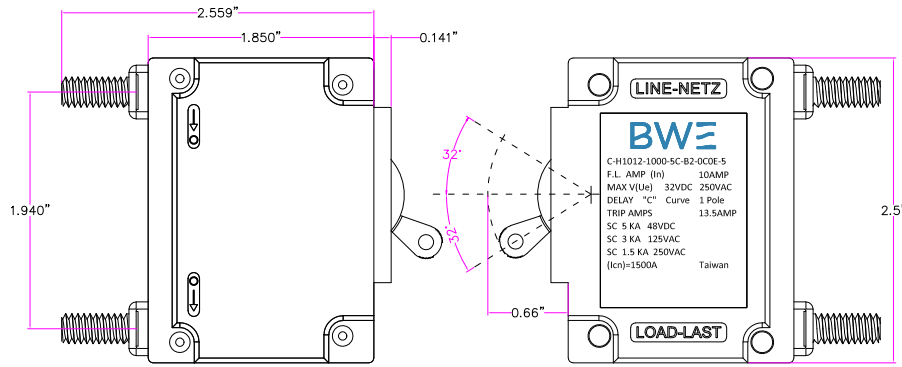


Panel Cutout Detail

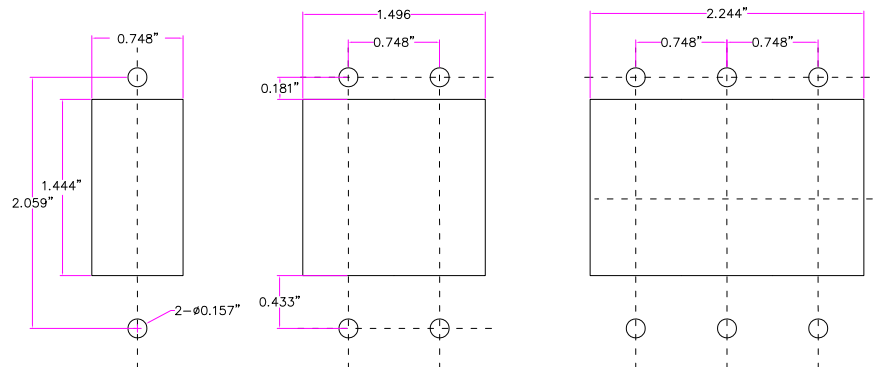



Time Current Operating Characteristics

Current	100%	125%	150%	200%	400%	600%
Delay Type	No trip	2.0-60	1.3-38	1.0-18	0.15-2	0.04-1
C	No trip	2.0-60	1.3-38	1.0-18	0.15-2	0.04-1

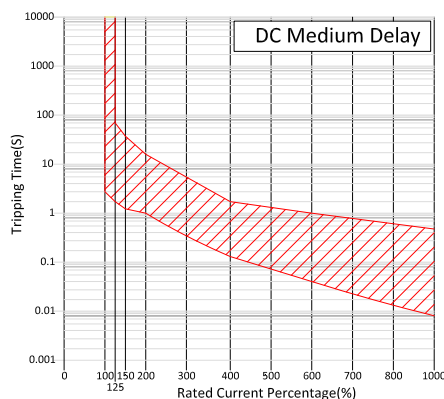



*150A/200A/250A/300A is Parallel connection

Operating Device	Toggle
Bracket	None
Number of Poles	1 ; 2 ; 3 (one per pole)
Rated Current	5A --- 100A
Maximum Voltage	240 VAC ; 80VDC
Interrupt Capacity	3000A @ 125VAC 1500A @ 250VAC 5000A @ 48VDC
Ambient Temperature	-40°C to +85°C
Circuit Breaker Type	Hydraulic-Magnetic - trip free
Mounting Screw	#6-32 Stainless Steel
Mounting Screw Torque	6 in-lb (0.68 Nm)
Terminal Stud	#1/4-20 Stainless Steel
Terminal Stud Torque	35 in-lb (3.95 Nm)
Mechanical Endurance Switching cycles	10,000 ON-OFF operations @ 6 per minute;

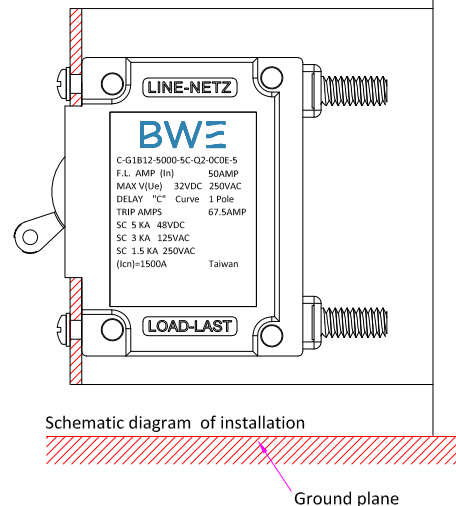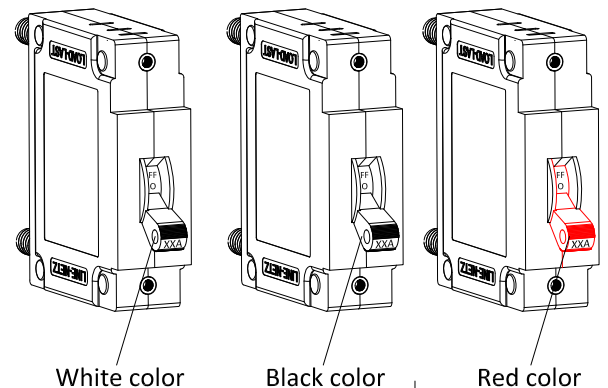


Hydraulic-Magnetic Circuit Breakers 5A--100A Toggle C series


*150A/200A/250A/300A is Parallel connection

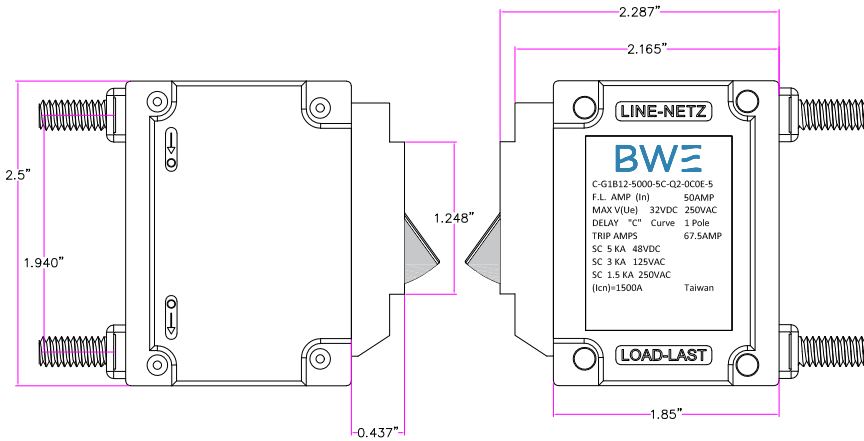





1 pole



2 poles




3 poles

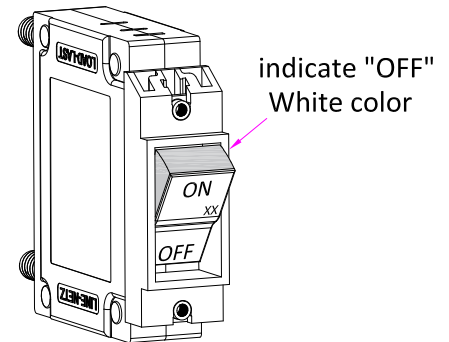


Time Current Operating Characteristics

Current	100%	125%	150%	200%	400%	600%
Delay Type	No trip	2.0-60	1.3-38	1.0-18	0.15-2	0.04-1
C	No trip	2.0-60	1.3-38	1.0-18	0.15-2	0.04-1

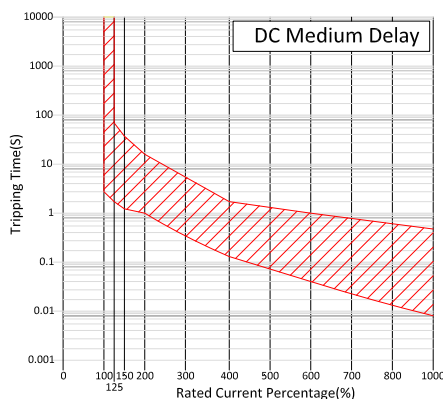

White color

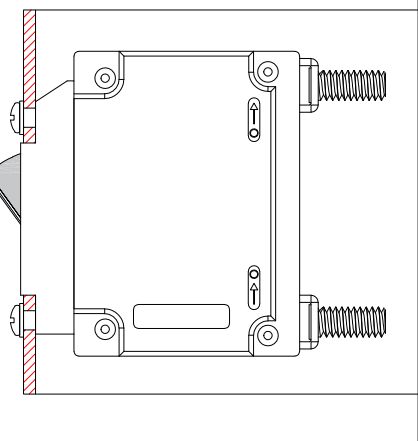

Schematic diagram of installation

Ground plane

Ordering Guide

C-Series Circuit Breaker



Sample
Order

C - B T - R - 30 - 2

Section

1

2

3

4

5

6

1. Series

C

*In production
and will be
available soon.

2/3. Actuator

BT=Toggle

FR=Flat Rocker

RR=Raised Rocker*

RO=Restricted Off

4. Color

W=White

B=Black

R=Red

5. Amperage

2.5=2.5 Amps

05=5 Amps

10=10 Amps

15=15 Amps

20=20 Amps

25=25 Amps

30=30 Amps

35=35 Amps

40=40 Amps

50=50 Amps


60=60 Amps

70=70 Amps

80=80 Amps

90=90 Amps

100=100 Amps

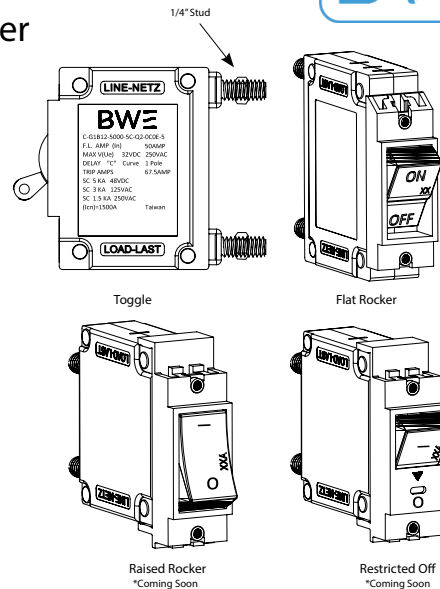

6. Poles

1=One Pole

2=Two Pole*

3=Three Pole*

*Coming Soon: Raised
Rocker (Finger Guard)